



DANISH EMISSION INVENTORIES FOR ROAD TRANSPORT AND OTHER MOBILE SOURCES

Inventories until 2020

Scientific Report from DCE – Danish Centre for Environment and Energy

No. 504

2022



AARHUS
UNIVERSITY

DCE – DANISH CENTRE FOR ENVIRONMENT AND ENERGY

DANISH EMISSION INVENTORIES FOR ROAD TRANSPORT AND OTHER MOBILE SOURCES

Inventories until 2020

Scientific Report from DCE – Danish Centre for Environment and Energy

No. 504

2022

Morten Winther

Aarhus University, Department of Environmental Science



AARHUS
UNIVERSITY

DCE – DANISH CENTRE FOR ENVIRONMENT AND ENERGY

Data sheet

Series title and no.:	Scientific Report from DCE – Danish Centre for Environment and Energy No. 504
Category:	Scientific advisory report
Title:	Danish emission inventories for road transport and other mobile sources
Subtitle:	Inventories until 2020
Author:	Morten Winther
Institution:	Department of Environmental Science
Publisher:	Aarhus University, DCE – Danish Centre for Environment and Energy ©
URL:	http://dce.au.dk/en
Year of publication:	August 2022
Editing completed:	July 2022
Referee:	Ole-Kenneth Nielsen, Department of Environmental Science
Quality assurance, DCE:	Vibeke Vestergaard Nielsen, DCE – Danish Centre for Environment and Energy
Linguistic QA:	Ann-Katrine Christoffersen, Department of Environmental Science
Financial support:	No external financial support
Please cite as:	Winther, M. 2022: Danish emission inventories for road transport and other mobile sources. Inventories until 2020. Aarhus University, DCE – Danish Centre for Environment and Energy, 138pp. Scientific Report No. 504. http://dce2.au.dk/pub/SR504.pdf
	Aarhus University, DCE – Danish Centre for Environment and Energy, 61 pp. Scientific Report No. 463. http://dce2.au.dk/pub/SR463.pdf
	Reproduction permitted provided the source is explicitly acknowledged
Abstract:	This report explains the parts of the Danish emission inventories related to road transport and other mobile sources. Emission results are shown for CO ₂ , CH ₄ , N ₂ O, SO ₂ , NO _x , NMVOC, CO, particulate matter (PM), BC, heavy metals, dioxins, HCB, PCBs and PAHs. From 1990-2020 the fuel consumption and CO ₂ emissions for road transport increased by 26 and 19 %, respectively, and CH ₄ emissions have decreased by 90 %. A N ₂ O emission increase of 42 % is related to the relatively high emissions from older gasoline catalyst cars. The 1985-2020 emission decrease for NO _x , NMVOC, CO, particulates (exhaust only: Size is below PM _{2.5}) and BC are 77, 92, 91, 90 and 88 %, respectively, due to the introduction of vehicles complying with gradually stricter emission standards. For SO ₂ the emission drop 99 % (due to reduced sulphur content in the diesel fuel), whereas the NH ₃ emissions increased by 1068 % (due to the introduction of catalyst cars). For other mobile sources the calculated fuel consumption and emission changes for CO ₂ , CH ₄ and N ₂ O were -19, -20, -64 and -5 %, from 1990 to 2020. The emissions of SO ₂ , NO _x , NMVOC, CO and PM (all size fractions) decreased by 96, 49, 66, 37, 79 and 80 %, respectively, from 1985 to 2020. For NH ₃ the emissions increased by 15 % in the same time period. Uncertainties for the emissions and trends were estimated.
Keywords:	Road transport, military, railways, domestic navigation, domestic aviation, working equipment and machinery, SO ₂ , NO _x , NMVOC, CH ₄ , CO, CO ₂ , N ₂ O, PM, heavy metals, dioxins, PAHs, greenhouse gases, acidifying components
Layout:	Ann-Katrine Holme Christoffersen
Front page photo:	Vickie Møller
ISBN:	978-87-7156-703-8
ISSN (electronic):	2244-9981
Number of pages:	138
Internet version:	The report is available in electronic format (pdf) at http://dce2.au.dk/pub/SR504.pdf

Contents

Preface	5
Summary	6
Methodologies	6
Emissions from road transport	8
Emissions from other mobile sources	9
Heavy metals	9
POPs	10
Uncertainties	10
Sammenfatning	11
Metoder	11
Emissioner fra vejtrafik	12
Emissioner fra andre mobile kilder	13
Tungmetaller	14
POP	15
Usikkerheder	15
1 Introduction	16
2 Total Danish emissions, international conventions and reduction targets	17
2.1 Total Danish emissions	17
2.2 International conventions and reduction targets	18
3 Inventory structure	21
4 Input data and calculation methods for road transport	23
4.1 Vehicle fleet and mileage data	23
4.2 Emission legislation	28
4.3 Fuel consumption and emission factors	38
4.4 Deterioration factors	41
4.5 Calculation method	42
5 Input data and calculation methods for other mobile sources	57
5.1 Activity data	57
5.2 Emission legislation	74
5.3 Emission factors	82
5.4 Calculation method	85
5.5 Energy balance between DEA statistics and inventory estimates	90
6 Fuel consumption and emissions	93
6.1 Fuel consumption	93
6.2 Emissions of CO ₂ , CH ₄ and N ₂ O	100
6.3 Emissions of SO ₂ , NO _x , NMVOC, CO, NH ₃ , TSP, PM ₁₀ , PM _{2.5} and BC	105
6.4 Heavy metals	118

6.5	Persistent organic pollutants	122
6.6	International transport	125
7	Uncertainties	128
	References	130
	Annexes	137
	List of content	137

Preface

On behalf of the Ministry of Environment in Denmark and the Danish Ministry of Climate, Energy and Utilities, DCE - Danish Centre for Environment and Energy – at Aarhus University prepares the Danish atmospheric emission inventories. DCE reports the results on an annual basis to the UNFCCC (United Nations Framework Convention on Climate Change) and the UNECE LRTAP (United Nations Economic Commission for Europe Convention on Long Range Transboundary Pollutants) conventions as well as to the EU under the relevant European Union regulations and directives. The work is carried out by the Department of Environmental Science at Aarhus University.

This report explains the parts of the Danish emission inventories related to road transport and other mobile sources. In the report emission results are shown for CO₂ (carbon dioxide), CH₄ (methane) and N₂O (nitrous oxide) in a time-series from 1990-2020 as reported to the UNFCCC. For SO₂ (sulphur dioxide), NO_x (nitrogen oxides), NMVOC (non-methane volatile organic compounds), CO (carbon monoxide), NH₃ (ammonia), PM (particulate matter) and BC (black carbon) emission results are shown from 1985-2020, and for heavy metals, dioxins, HCB (hexachlorobenzene), PCBs (polychlorinated biphenyls) and PAHs (poly-aromatic hydrocarbons) emission results are shown from 1990-2020, as reported to the UNECE LRTAP convention. All results are grouped according to the UNFCCC Common Reporting Format (CRF) and UNECE National Format for Reporting (NFR) codes.

Summary

This report explains the emission inventories for road transport and other mobile sources, which are part of the annual Danish emission inventories reported to the UNFCCC (United Nations Framework Convention on Climate Change) and the UNECE LRTAP (United Nations Economic Commission for Europe Long Range Transboundary Pollution) convention. The sub-sectors for other mobile sources (Table 0.1) are military, railways, inland waterways, national sea traffic, national fishing, civil aviation and non-road machinery used in Agriculture, Forestry, Industry, Household/Gardening and Commercial/Institutional.

The emissions of CO₂ (carbon dioxide), CH₄ (methane) and N₂O (nitrous oxide), SO₂ (sulphur dioxide), NO_x (nitrogen oxides), NMVOC (non-methane volatile organic compounds), CO (carbon monoxide), NH₃ (ammonia), PM (particulate matter), BC (black carbon), heavy metals, dioxins, HCB (hexachlorobenzene), PCBs (polychlorinated biphenyls) and PAHs (polycyclic aromatic hydrocarbons) are shown in time-series as required by the UNFCCC and the UNECE LRTAP conventions, and grouped according to the UNFCCC Common Reporting Format (CRF) and UNECE National Format for Reporting (NFR) classification codes.

Table 0.1 Mobile sources and CRF/NFR codes.

SNAP classification	CRF/NFR classification
0701 Road traffic: Passenger cars	1A3bi Road transport: Passenger cars
0702 Road traffic: Light duty vehicles	1A3bii Road transport: Light duty vehicles
0703 Road traffic: Heavy duty vehicles	1A3biii Road transport: Heavy duty vehicles
0704 & 0705 Road traffic: Mopeds and motor cycles	1A3biv Road transport: Mopeds & motorcycles
0706 Road traffic: Evaporation	1A3bv Road transport: Evaporation
0707 Road traffic: Brake and tire wear	1A3bvi Road transport: Brake and tire wear
0708 Road traffic: Road abrasion	1A3bvii Road transport: Road abrasion
0801 Military	1A5b Other, Mobile
0802 Railways	1A3c Railways
0803 Inland waterways	1A5b Other, Mobile
080402 National sea traffic	1A3dii National navigation (Shipping)
080403 National fishing	1A4ciii Agriculture/Forestry/Fishing: National fishing
080404 International sea traffic	1A3di (i) International navigation (Shipping)
080501 Dom. airport traffic (LTO < 1000 m)	1A3aii (i) Civil aviation (Domestic, LTO)
080502 Int. airport traffic (LTO < 1000 m)	1A3ai (i) Civil aviation (International, LTO)
080503 Dom. cruise traffic (> 1000 m)	1A3aii (ii) Civil aviation (Domestic, Cruise)
080504 Int. cruise traffic (> 1000 m)	1A3ai (ii) Civil aviation (International, Cruise)
0806 Agriculture	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0807 Forestry	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0808 Industry	1A2gvii Manufacturing industries/Construction (mobile)
0809 Household and gardening	1A4bii Residential: Household and gardening (mobile)
0811 Commercial and institutional	1A4aii Commercial/Institutional: Mobile

Methodologies

The emission calculations for road transport are made with an internal DCE model, with a structure similar to the European COPERT 5 (Computer Programme to calculate the Emissions from Road Transport) methodology. The emissions are calculated for operationally hot engines, during cold start and fuel evaporation. The model also includes the emission effect of catalyst wear.

Input data for vehicle stock and mileage is obtained from DTU Transport, and is grouped according to average fuel consumption and emission behaviour. The emissions are estimated by combining vehicle and annual mileage numbers with emission factors for hot engines, emission ratios between cold and hot engines and factors for gasoline evaporation.

The emissions from air traffic are also calculated with a DCE model. For 2001-2020, the emission estimates are made for each flight, using flight data from the Danish Transport Authority and landing/take off (LTO) and distance related emission factors from the EMEP/EEA guidebook. For previous years, the background data consist of LTO/aircraft type statistics from Copenhagen Airport and total LTO numbers from the Danish Transport Authority. By using appropriate assumptions, a consistent time-series of emissions is produced back to 1985 using also the detailed city-pair emission inventory results from 2001 as a basis.

National sea transport is split into regional ferries, small ferries (island and short cut ferries), freight transport between Denmark and Greenland/Faroe Islands, and other national sea transport. For ferries, the fuel consumption and emissions are calculated in the DCE ship emission model as a product of number of round trips, sailing time per round trip, engine size, engine load factor and fuel consumption/emission factor. For freight transport between Denmark and Greenland/Faroe Islands, and other national sea transport, the calculations are simply fuel based using fuel sale figures in combination with average fuel related emission factors.

For fishing vessels, the emissions are calculated using log data from the Danish Fisheries Agency and emission factors and engine load data from the DCE ship emission model. Log data exist for each fishing trip made by Danish registered fishing vessels from 1985-2020 and consist of vessel registration number, build year, type, overall vessel length, gross tonnage, total installed engine power and hours at sea.

Non-road working machines and equipment are grouped in the following sectors: Agriculture, Forestry, Industry, Household/Gardening and Commercial/Institutional. Recreational craft are grouped in the sector Other. In general, the emissions are calculated by combining information on the number of different machine types and their respective load factors, engine sizes, annual working hours and emission factors.

For military and railways, the emissions are calculated as the product of fuel use and emission factors.

Fuel sales data are obtained from the Danish energy statistics provided by the Danish Energy Agency (DEA). For road transport, aviation and fisheries, the emission results are adjusted in a fuel balance to ensure that all statistical fuel sold is accounted for in the calculations. For national sea transport, the fuel consumption of heavy oil and gas oil for ferries is calculated directly by DCE. The difference between fuel sales statistics for national sea transport and bottom up fuel estimates for ferries is allocated to other national sea transport. In order to comply with the IPCC guidelines the fuel consumption by vessels between Denmark and Greenland/Faroe Islands are subtracted from the DEA fuel sales figures for international sea transport, and added to the national part of the emission inventories.

Emissions from road transport

Set in relation to the Danish national emission totals, the largest emission shares for road transport are noted for NO_x, CO₂, CO, BC, PM_{2.5}, PM₁₀, NMVOC and TSP. In 2020, the emission percentages were 25, 36, 26, 19, 10, 9, 5 and 3 %, respectively. The emissions of NH₃, N₂O, CH₄ and SO₂ have marginal shares of 1.0, 2.1, 0.1 and 0.8 %, respectively.

From 1990 to 2020, the calculated fuel consumption and emission changes for CO₂, CH₄ and N₂O are 26, 19, -90 and 42 %. The calculated 1985-2020 fuel consumption and emission changes for NO_x, NMVOC, CO, particulates (exhaust only: Size is below PM_{2.5}) and BC are 43, -77, -92, -91, -90 and -88 %.

The most significant emission changes from 1985 to 2020 occur for SO₂ and NH₃. For SO₂ the emission drop is 99 % (due to reduced sulphur content in the diesel fuel), whereas the NH₃ emissions increase by 1068 % (due to the introduction of catalyst cars).

Table 0.2 Emissions (tonnes^a) from road transport in 2020, changes from 1985 (1990^b) to 2020, and 2020 shares of national emission totals.

CRF/NFR ID	SO ₂	NO _x	NMVOC	CH ₄	CO	CO ₂	N ₂ O	NH ₃	TSP	PM ₁₀	PM _{2.5}	BC
Road transport: Passenger cars	38 10837	2903	197	40659	5996	134	646	162	162	162	93	
Road transport: Light duty vehicles	9 7084	167	6	1767	1482	43	42	90	90	90	68	
Road transport: Heavy duty vehicles	23 4435	160	41	2090	3594	238	43	71	71	71	42	
Road transport: Mopeds & motorcycles	0 125	872	72	6197	69	1	1	13	13	13	2	
Road transport: Gasoline evaporation	0 0	1331	0	0	0	0	0	0	0	0	0	
Road transport: Brake wear	0 0	0	0	0	0	0	0	491	481	192	13	
Road transport: Tyre wear	0 0	0	0	0	0	0	0	948	569	398	145	
Road transport: Road abrasion	0 0	0	0	0	0	0	0	1148	574	310	0	
Road transport exhaust total	70 22482	5434	316	50712	11140	416	733	337	337	337	206	
Road transport non exhaust total	0 0	0	0	0	0	0	0	2587	1624	900	158	
Road transport total	70 22482	5434	316	50712	11140	416	733	2923	1961	1236	363	
National total	9145 89025	106584	294232	191949	31171	19385	76254	84326	22599	12310	1876	
Road- % of national total. 2020	0.8	25	5.1	0.1	26	36	2.1	1.0	3.5	8.7	10.0	19
Road- % change 1985-2020 ^b	-99	-77	-92	-90	-91	19	42	1068	-90	-90	-90	-88

^a) Unit for CO₂: ktonnes. ^b) For the greenhouse gases CO₂, CH₄ and N₂O, the emission changes are relative to 1990.

In 2020, the most important CO₂ emission source for road transport is passenger cars (54 %), followed by heavy-duty vehicles (32 %), light-duty vehicles (13 %) and 2-wheelers (1 %). For CH₄ the 2020 emission shares were 62, 23, 13 and 2 % for passenger cars, 2-wheelers, heavy-duty vehicles and light-duty vehicles, respectively, and for N₂O the emission shares for passenger cars, heavy and light-duty vehicles were 57, 32 and 10 %, respectively.

For 2020, the following emission shares for passenger cars, heavy-duty vehicles, light-duty vehicles and 2-wheelers (percentage shares in brackets) are calculated for NO_x (48, 20, 31 and 1 %), NMVOC (53, 3, 3 and 16 %), CO (80, 4, 4 and 12 %), PM (48, 21, 27 and 4 %), BC (34, 47, 19 and 0 %), and NH₃ (88, 6, 6 and 0 %).

Set in relation to total road transport emissions in 2020, the emission shares of TSP, PM₁₀, PM_{2.5} and BC were 90, 85, 76 and 36 %, respectively, related to tire, brake and road abrasion.

Emissions from other mobile sources

For other mobile sources, the emissions of NO_x, CO, BC and CO₂ have the largest shares of the national totals in 2020. The shares are 25, 29, 21 and 9 %, respectively. The 2020 SO₂, NMVOC, TSP, PM₁₀ and PM_{2.5} emission shares are 6, 4, 1, 4 and 8 %, respectively, whereas the emissions of N₂O, NH₃ and CH₄ have marginal shares of around 1 % or less in 2020.

From 1990 to 2020, the total fuel consumption and the emissions of CO₂, CH₄, and N₂O have changed by -19, -20, -64 and -5 %, respectively. From 1985 to 2020, the calculated emission changes for SO₂, NO_x, NMVOC, CO, PM (all size fractions) and BC are -96, -49, -66, -37, -79 and -80 %, respectively. For NH₃ the emissions increased by 15 % in the same time period.

Table 0.3 Emissions from other mobile sources in 2020 (tonnes^a), changes from 1985 (1990^b) to 2020, and 2020 shares of national emission totals.

CRF/NFR ID	SO ₂	NO _x	NMVOC	CH ₄	CO	CO ₂	N ₂ O	NH ₃	TSP	PM ₁₀	PM _{2.5}	BC
Industry: Mobile	3	1732	477	15	3770	542	25	1	137	137	137	94
Civil aviation (Domestic)	25	321	26	1	922	78	4	0	3	3	3	1
Railways	1	1464	73	3	186	197	6	1	19	19	19	12
National navigation (Shipping)	219	9032	388	32	924	478	12	0	251	249	247	24
Commercial/Institutional: Mobile	1	643	762	30	27828	199	8	0	57	57	57	31
Residential: Mobile	0	27	764	15	8363	20	0	0	12	12	12	1
Agriculture/Forestry: Off-road	5	3557	913	52	9710	861	41	3	334	334	334	194
National fishing	167	4181	191	6	562	264	6	0	73	72	72	16
Other, Mobile	83	1238	272	10	3022	243	9	1	59	59	59	22
Total Other mobile	505	22194	3866	165	55287	2882	112	6	944	940	939	394
Total national	9145	89025	106584	294232	191949	31171	19385	76254	84326	22599	12310	1876
Other mobile- % of national total. 2020	5.5	25	3.6	0.1	29	9.2	0.6	0.01	1.1	4.2	7.6	21
Other mobile- % change 1985-2020 ^b	-96	-49	-66	-64	-37	-20	-5	15	-79	-79	-79	-80

^a) Unit for CO₂: ktonnes. ^b) For the greenhouse gases CO₂, CH₄ and N₂O, the emission changes are relative to 1990.

The largest source of NO_x emissions is national navigation, followed by Fisheries and Agriculture/Forestry. For CO₂, the largest emission sources are Agriculture/Forestry, Industry and National navigation, in this consecutive order.

For particulates (all size fractions) and BC, the largest emission sources are Agriculture/Forestry, followed by national Navigation and Industry. For NMVOC and CO most of the emissions come from gasoline fuelled working machinery in the Commercial/Institutional, Agriculture/Forestry and Residential sectors.

Heavy metals

Heavy metal emissions are calculated for fuel and engine oil as well as for tyre, brake and road wear. The road transport shares for copper (Cu), zinc (Zn), lead (Pb), chromium (Cr) and cadmium (Cd) are 93, 46, 45, 12 and 7 % of national totals in 2020. For other mobile sources, the nickel (Ni), arsenic (As) and selenium (Se) shares are 47, 14 and 14 %. For the remaining components, the emission shares are less than 6 %.

The most important exhaust related emissions (fuel and engine oil) for road transport (percent of national total in brackets) are Zn (14 %), Cd (5.8 %), Cr (6.5 %) and Hg (9.4 %). The most important wear related emissions are Cu (93 %) and Pb (43 %) almost solely coming from tyre wear, and Zn (32 %) from

brake and tyre wear. For other mobile sources, the emissions of Ni and As arise from the use of marine diesel oil and residual oil in fisheries and navigation. The emissions of Pb almost solely come from the use of aviation gasoline.

In general, the development in emissions follows the trends in fuel/engine oil consumption and vehicle mileage (wear related emissions). It must be noted, however, that there has been an almost 100 % decline in the exhaust related emissions of Pb, due to the phasing out of leaded gasoline fuels until 1994.

POPs

Dioxins, HCB, PCBs and PAHs are categorized as POPs (persistent organic pollutants). For the individual POP components, the emission shares for road transport and other mobile sources are 7 % or less of the national total in 2020.

Uncertainties

For mobile sources in 2020, the CO₂ emissions are determined with the highest accuracy (5 % uncertainty), followed by the emissions of CH₄ (30 %), TSP (45 %), SO₂ (46 %), PM₁₀ (47 %), PM_{2.5} (52 %), NMVOC (51 %), BC (58 %), NO_x (56 %), CO (58 %) and N₂O (103 %).

The uncertainties for the 1990-2020 emission trends listed by emission component (percentage uncertainty in brackets) are: CO₂ (4 %), CH₄ (2 %), TSP (8 %), SO₂ (1 %), PM₁₀ (5 %), PM_{2.5} (2 %), NMVOC (4 %), BC (2 %), NO_x (7 %), CO (8 %) and N₂O (51 %).

For NH₃, heavy metals and PAHs the 2020 emissions have uncertainty levels of between 700 and 1000 %. In this case, the emission trend uncertainties are significantly lower; still large fluctuations exist between the calculated values for the different emission components.

Sammenfatning

Denne rapport dokumenterer de årlige danske emissionsopgørelser for vejtransport og andre mobile kilder. Opgørelserne laves som en del af de samlede danske opgørelser, og rapporteres til UNFCCC (United Nations Framework Convention on Climate Change) og UNECE LRTAP (United Nations Economic Commission for Europe Long Range Transboundary Pollution) konventionerne. Underkategorierne for andre mobile kilder er: Militær, jernbane, fritidsfartøjer, national søfart, fiskeri, civil flyvning, og arbejdsredskaber- og maskiner i landbrug, skovbrug, industri, have/hushold og handel/service.

For CO₂, (kuldioxid) CH₄ (metan), N₂O (lattergas), SO₂ (svovldioxid), NO_x (kvælstofoxider), NMVOC (ikke-metan flygtige organiske forbindelser), CO (kulmonoxid), PM (partikler), BC (black carbon), tungmetaller, dioxiner, HCB, PCB'er og PAH'er er de beregnede emissioner vist i tidsserier iht. til UNFCCC og UNECE LRTAP konventionernes krav, og resultaterne grupperes i henhold til UNFCCC's Common Reporting Format (CRF) og UNECE's National Format for Reporting (NFR) rapporteringskoder.

Tabel 0.1 Mobile kilder og CRF/NFR koder.

SNAP koder	CRF/NFR koder
0701 Vejtrafik: Personbiler	1A3bi Road transport: Passenger cars
0702 Vejtrafik: Varebiler	1A3bii Road transport: Light duty vehicles
0703 Vejtrafik: Tunge køretøjer	1A3biii Road transport: Heavy duty vehicles
0704 & 0705 Vejtrafik: Knallerter og motorcykler	1A3biv Road transport: Mopeds & motorcycles
0706 Vejtrafik: Fordampning	1A3bv Road transport: Evaporation
0707 Vejtrafik: Bremse- og dækslid	1A3bvi Road transport: Brake and tire wear
0708 Vejtrafik: Vejslid	1A3bvii Road transport: Road abrasion
0801 Militær	1A5b Other, Mobile
0802 Jernbane	1A3c Railways
0803 Småbåde og fritidsfartøjer	1A5b Other, Mobile
080402 Indenrigs skibstrafik	1A3dii National navigation (Shipping)
080403 Indenrigs fiskeri	1A4ciii Agriculture/Forestry/Fishing: National fishing
080404 Udenrigs skibstrafik	1A3di (i) International navigation (Shipping)
080501 Indenrigs flytrafik (LTO < 1000 m)	1A3aai (i) Civil aviation (Domestic, LTO)
080502 Udenrigs flytrafik (LTO < 1000 m)	1A3ai (i) Civil aviation (International, LTO)
080503 Indenrigs flytrafik (Cruise > 1000 m)	1A3aai (ii) Civil aviation (Domestic, Cruise)
080504 Udenrigs flytrafik (Cruise > 1000 m)	1A3ai (ii) Civil aviation (International, Cruise)
0806 Landbrug	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0807 Skovbrug	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0808 Industri	1A2gvii Manufacturing industries/Construction (mobile)
0809 Have- og hushold	1A4bii Residential: Household and gardening (mobile)
0811 Handel og service	1A4aai Commercial/Institutional: Mobile

Metoder

Emissionerne for vejtrafik beregnes med en intern DCE-model, der benytter samme modelprincip som den europæiske emissionsmodel COPERT 5 (Computer Programme to calculate the Emissions from Road Transport). I DCE-modellen beregnes emissionerne for køretøjer med driftsvarme motorer, under koldstart og som følge af brændstoffordampning. Modellen tager også højde for de forøgede emissioner som følge af katalysatorslid. Input data for

køretøjsbestand og årskørsler oplyses af DTU Transport og køretøjerne grupperes iht. gennemsnitligt brændstofforbrug og emissioner. Emissionerne beregnes som produktet af antallet af køretøjer, køretøjernes årskørsler, emissionsfaktorerne for varme motorer, emissionsforholdet mellem kolde og varme motorer, og faktorerne for benzinfordampning.

For luftfart beregnes emissionerne også i en DCE model. For 2001-2020 opgøres emissionerne for hver enkelt flyvning. Til beregningerne bruges flydata fra Trafikstyrelsen samt landing/take off (LTO) og cruise emissionsfaktorer pr. fløjet distance fra EMEP/EEA guidebogen. For årene før 2001 bruges som baggrundsdata en LTO/flytype statistik fra Københavns Lufthavn samt Trafikstyrelsens tal for antallet af starter og landinger. En konsistent emissionsopgørelse er beregnet tilbage til 1985 ved at gøre passende antagelser og ved at bruge de detaljerede city-pair emissionsresultater for 2001 som basis.

National søfart er opdelt i regionale færger, småfærger (ø- og genvejsfærger), godstransport mellem Danmark og Grønland/Færøerne og øvrig national søfart. For færger beregnes emissionerne i DCE's skibsemissionsmodel som produktet af antallet af dobbeltture, sejltime pr. dobbelttur, motorstørrelsen, motorlastfaktoren og emissionsfaktoren. For godstransport mellem Danmark og Grønland/Færøerne og øvrig national søtransport beregnes emissionerne som produktet af brændstofsalt og gennemsnitlige brændstofrelaterede emissionsfaktorer.

For fiskeri beregnes emissionerne ved brug af log data fra Fiskeristyrelsen og emissionsfaktorer og motorbelastningsprocenter fra DCE's skibsemissionsmodel. Log data er opsamlet for hver enkelt fangstrejse gjort af dansk indregistrerede fiskefartøjer i perioden 1985-2020 og består af fartøjsregistreringsnummer, byggeår, fartøjstype, skibslængde, brutto ton, i alt installeret motoreffekt og antal timer til havs.

For militær og jernbane beregnes emissionerne som produktet af brændstofsalt og emissionsfaktorer.

For arbejdsredskaber og -maskiner inden for landbrug, skovbrug, industri, have/hushold, handel/service samt fritidsfartøjer beregnes emissionerne som produktet af antallet af maskiner, lastfaktorer, motorstørrelser, årlige driftstider og emissionsfaktorer.

Data for energiforbrug stammer fra Energistyrelsens (ENS) energistatistik. For vejtransport og luftfart justeres de modelberegneede emissionsresultater ud fra en brændstofbalance, dvs. forholdet mellem det statistisk opgjorte forbrug og det beregnede forbrug i modellen. For national søtransport beregner DCE brændstofforbruget direkte for diesel og tung olie for færger. Forskellen mellem det statistiske brændstofsalt for national søtransport og det beregnede forbrug for færger henføres til øvrig national søtransport. I henhold til IPCC's retningslinjer fratrækkes energiforbruget for skibstrafikken mellem Danmark og Grønland/Færøerne ENS totalen for international søtransport og overføres til den nationale del af opgørelserne.

Emissioner fra vejtrafik

Set i forhold til landets samlede emissionstotal beregnes vejtrafikkens største emissionsandele for NO_x, CO₂, CO, BC, PM_{2.5}, PM₁₀, NMVOC og TSP. Procentandelene for disse stoffer ligger på hhv. 25, 36, 26, 19, 10, 9, 5 og 3 %,

Emissionsandelene for NH₃, N₂O, CH₄ og SO₂ er små og ligger på hhv. 1,0, 2,1, 0,1 og 0,8 %.

De beregnede ændringer i energiforbruget og CO₂-, CH₄- og N₂O-emissionerne er på hhv. 26, 19, -90 og 42 % fra 1990-2020. For NO_x, NMVOC, CO, partikler (kun udstødning: < PM_{2.5}) og BC er de beregnede ændringer på hhv. 43, -77, -92, -91, -90 og -88 % i perioden 1985-2020.

De mest markante emissionsændringer fra 1985 til 2020 sker for SO₂ og NH₃. SO₂-emissionerne falder med 99 % (pga. et lavere svovlindhold i diesel), hvorimod NH₃-emissionerne stiger med 1068 % (pga. indførelsen af biler med katalysator).

Tabel 0.2 Emissioner fra vejtrafik i 2020 (tons^a), ændringer fra 1985 (1990^b) til 2020, og 2020-andele af den samlede danske emissionstotal.

CRF/NFR ID	SO ₂	NO _x	NMVOC	CH ₄	CO	CO ₂	N ₂ O	NH ₃	TSP	PM ₁₀	PM _{2.5}	BC
Personbiler	38	10837	2903	197	40659	5996	134	646	162	162	162	93
Varebiler	9	7084	167	6	1767	1482	43	42	90	90	90	68
Tunge køretøjer	23	4435	160	41	2090	3594	238	43	71	71	71	42
Knallerter og motorcykler	0	125	872	72	6197	69	1	1	13	13	13	2
Fordampning	0	0	1331	0	0	0	0	0	0	0	0	0
Bremseslid	0	0	0	0	0	0	0	0	491	481	192	13
Dækslid	0	0	0	0	0	0	0	0	948	569	398	145
Vejslid	0	0	0	0	0	0	0	0	1148	574	310	0
Total udstødning	70	22482	5434	316	50712	11140	416	733	337	337	337	206
Total slidrelateret	0	0	0	0	0	0	0	0	2587	1624	900	158
I alt	70	22482	5434	316	50712	11140	416	733	2923	1961	1236	363
National total	9145	89025	106584	294232	191949	31171	19385	76254	84326	22599	12310	1876
% af national total, 2020	0,8	25	5,1	0,1	26	36	2,1	1,0	3,5	8,7	10,0	19
% ændring 1985-2020 ^b	-99	-77	-92	-90	-91	19	42	1068	-90	-90	-90	-88

^a) Enhed for CO₂: ktöns. ^b) For drivhusgasserne CO₂, CH₄ and N₂O, er emissionsændringerne beregnet i forhold til 1990.

De største CO₂-emissioner for vejtrafik i 2020 beregnes for personbiler (54 %), fulgt af tunge køretøjer (32 %), varebiler (13 %) og 2-hjulede køretøjer (1 %). For CH₄ beregnes emissionsandele på hhv. 62, 23, 13 og 2 % for personbiler, 2-hjulede køretøjer, tunge køretøjer og varebiler, og N₂O-emissionsandelene for personbiler, tunge køretøjer og varebiler er på hhv. 57, 32 og 10 %.

I 2020 beregnes emissionsandele for personbiler, tunge køretøjer, varebiler og 2-hjulede køretøjer (procentandele i parentes) for NO_x (48, 20, 31 og 1 %), NMVOC (53, 3, 3 og 16 %), CO (80, 4, 4 og 12 %), PM (48, 21, 27 og 4 %), BC (34, 47, 19 og 0 %), og NH₃ (88, 6, 6 og 0 %).

De samlede emissioner af TSP, PM₁₀, PM_{2.5} og BC fra dæk-, bremse- og vejslid udgjorde i 2020 hhv. 90, 85, 76 og 36 % af vejtrafikens samlede emissioner.

Emissioner fra andre mobile kilder

Andre mobile kilders NO_x, CO, BC og CO₂-emissioner udgjorde i 2020 hhv. 25, 29, 21 og 9 % af landets total. I 2020 er emissionsandelene for SO₂, NMVOC, TSP, PM₁₀ og PM_{2.5} på hhv. 6, 4, 1, 4 og 8 %, mens andelene for N₂O, NH₃ og CH₄ kun er på omtrent 1 % eller mindre.

Fra 1990-2020 beregnes ændringer for energiforbrug, CO₂-, CH₄- og N₂O-emissioner på hhv. -19, -20, -64 og -5 %. Fra 1985-2020 beregnes emissionsændringer for SO₂, NO_x, NMVOC, CO og partikler (alle størrelsesfraktioner) på hhv. -96, -49, -66, -37, -79 og -80 %. For NH₃ stiger emissionen med 15 % i samme periode.

Tabel 0.3 Emissioner (tons^a) fra andre mobile kilder i 2020, ændringer fra 1985 (1990^b) til 2020, og 2020-andele af den samlede danske emissionstotal.

CRF/NFR ID	SO ₂	NO _x	NMVOC	CH ₄	CO	CO ₂	N ₂ O	NH ₃	TSP	PM ₁₀	PM _{2.5}	BC
Industri, arbejdsredskaber	3	1732	477	15	3770	542	25	1	137	137	137	94
Civil luftfart	25	321	26	1	922	78	4	0	3	3	3	1
Jernbane	1	1464	73	3	186	197	6	1	19	19	19	12
National søfart	219	9032	388	32	924	478	12	0	251	249	247	24
Handel og service, arbejdsredskaber	1	643	762	30	27828	199	8	0	57	57	57	31
Have-hushold, arbejdsredskaber	0	27	764	15	8363	20	0	0	12	12	12	1
Landbrug/skovbrug: Off-road	5	3557	913	52	9710	861	41	3	334	334	334	194
Fiskeri	167	4181	191	6	562	264	6	0	73	72	72	16
Øvrige mobile	83	1238	272	10	3022	243	9	1	59	59	59	22
Total Andre mobile kilder	505	22194	3866	165	55287	2882	112	6	944	940	939	394
Total national	9145	89025	106584	294232	191949	31171	19385	76254	84326	22599	12310	1876
Andre mobile kilder, % af national total, 2020	5,5	25	3,6	0,1	29	9,2	0,6	0,01	1,1	4,2	7,6	21
Andre mobile kilder, % ændring 1985-2020 ^b	-96	-49	-66	-64	-37	-20	-5	15	-79	-79	-79	-80

^{a)} Enhed for CO₂: ktons. ^{b)} For drivhusgasserne CO₂, CH₄ and N₂O, er emissionsændringerne beregnet i forhold til 1990.

De største emissionskilder for NO_x er national søfart, efterfulgt af fiskeri, landbrug/skovbrug og industri. For CO₂, er landbrug/skovbrug den største emissionskilde, efterfulgt af industri og national søfart.

For partikler (alle størrelsesfraktioner) og BC er den største emissionskilde landbrug/skovbrug, efterfulgt af national søfart og industri. Den største del af NMVOC- og CO-emissionerne kommer fra benzindrevne arbejdsredskaber og maskiner inden for handel og service, landbrug/skovbrug og have- og hushold.

Tungmetaller

Tungmetalemissioner beregnes for brændstofforbrug og motorolie samt for dæk-, bremse- og vejslid. For tungmetaller følger emissionerne udviklingen i energiforbruget. I 2020 er vejtrafikkens emissionsandele af de nationale totaler for kobber (Cu), zink (Zn), bly (Pb), krom (Cr) og kadmium (Cd) på hhv. 93, 46, 45, 12 og 7 %. For andre mobile kilder er nikkel (Ni), Arsen (As) og Pb andelene på 47, 14 og 14 %. For de øvrige komponenter er emissionsandelene på mindre end 6 %.

For vejtrafik beregnes de største udstødningsrelaterede emissionsandele (% af national total) for Zn (14 %), Cd (5.8 %), Cr (6.5 %) og Hg (9.4 %). De slidrelaterede emissionsandele for Cu (93 %) og Pb (43 %) kommer næsten udelukkende fra dækslid, og Zn (32 %) kommer fra bremse- og dækslid. Ni og As emissionerne fra andre mobile kilder skyldes forbruget af marin diesel og tung olie inden for fiskeri og national søfart og Pb-emissionen stammer fra forbruget af flybenzin.

Overordnet set følger tungmetalemissionerne udviklingen i forbruget af brændstof og motorolie samt trafikarbejdet (for slidrelaterede emissioner).

Dog har der været et fald på næsten 100 % for Pb, pga. udfasningen af bly i benzin til vejtransport frem til 1994.

POP

Dioxiner, HCB, PCB'er og PAH'er benævnes samlet set som POP'er (persistent organic pollutants). For de enkelte POP-komponenter udgør emissionsandelene for vejtransport og andre mobile kilder 7 % eller mindre af de nationale totaler i 2020.

Usikkerheder

I 2020 er CO₂-emissionerne de mest præcise (5 % usikkerhed), fulgt af CH₄ (30 %), TSP (45 %), SO₂ (46 %), PM₁₀ (47 %), PM_{2,5} (52 %), NMVOC (51 %), BC (58 %), NO_x (56 %), CO (58 %) og N₂O (103 %).

Usikkerheden på emissionsudviklingen fra 1990 til 2020 pr. emissionskomponent (procentusikkerheder i parentes) er: CO₂ (4 %), CH₄ (2 %), TSP (8 %), SO₂ (1 %), PM₁₀ (5 %), PM_{2,5} (2 %), NMVOC (4 %), BC (2 %), NO_x (7 %), CO (8 %) and N₂O (51 %).

For NH₃, tungmetaller og PAH'er er emissionerne for 2020 bestemt med en usikkerhed på mellem 700 og 1000 %. Her er usikkerheden på 1990-2020 - emissionsudviklingen signifikant lavere, men varierer dog meget fra stof til stof.

1 Introduction

The Danish atmospheric emission inventories are prepared on an annual basis and the results are reported to the *UN Framework Convention on Climate Change* (UNFCCC or Climate Convention) and to the UNECE LRTAP (United Nations Economic Commission for Europe Long Range Transboundary Pollution) convention. Furthermore, the greenhouse gas emission inventory is reported to the EU, because the EU – as well as the individual member states – is party to the Climate Convention. The same applies for the air pollution inventory, which is also reported to the EU, as the EU is also a Party to CLRTAP. The Danish atmospheric emission inventories are prepared by the Department of Environmental Science (ENVS)/Danish Centre for Environment and Energy (DCE), Aarhus University (former: the Danish National Environmental Research Institute (NERI)).

This report documents the Danish emission inventories for road transport and other mobile sources in the sectors Military, Railways, Navigation, Fisheries, Civil aviation and non-road machinery in Agriculture, Forestry, Industry, Residential and Commercial/Institutional.

In Chapter 2, an overview of the Danish emissions in 2020, the UNFCCC and UNECE conventions and the Danish emission reduction targets is provided. A brief overview of the inventory structure is given in Chapter 3. In Chapter 4 and 5, the inventory input data and calculation methods are explained for road transport and other mobile sources, respectively, while fuel use data and emission results are provided in Chapters 4 and 5, respectively. Fuel consumption and emission results are described in Chapter 6, whereas uncertainties and time-series inconsistencies are explained in Chapters 7.

2 Total Danish emissions, international conventions and reduction targets

2.1 Total Danish emissions

The total Danish emissions in 2020 are listed in the Tables 2.1-2.4. A thorough documentation of the Danish inventory can be seen in Nielsen et al. (2022a) for greenhouse gases reported to the UNFCCC convention (the Danish NIR report), and in Nielsen et al. (2022b) for the remaining emission components reported to the LRTAP Convention (the Danish IIR report). The emission reports are organised in six main source categories and a number of sub categories. The emission source *1 Energy* covers combustion in stationary and mobile sources as well as fugitive emissions from the energy sector.

Links to the latest emission inventories can be found on the ENVS/DCE home page <http://www.dmu.dk/luft/emissioner/emissioninventory/>. Information of the individual Danish inventory sectors, documentation reports of targeted emission surveys and updated emission factors are also available on the ENVS/DCE homepage.

Note that according to convention decisions the emissions from international transport as well as CO₂ emissions from renewable fuels are not included in the inventory emission totals. Although estimated, these emissions are reported as memo items only.

Further emission data for mobile sources are provided in Chapter 6.

Table 2.1 Greenhouse gas emissions 2020 reported to the UNFCCC convention.

	CO ₂ (Gg)	CH ₄ (Gg)	N ₂ O (Gg)	Total GHG ^a (Gg CO ₂ e)
1. Energy	26481	10.7	1.20	27106
2. Industrial processes and product use	1523	0.08	0.07	1925
3. Agriculture	255	235	17.2	11268
4. Land use, land-use change and forestry	2889	9.53	0.16	3175
5. Waste	23	38.7	0.74	1210
Total national	31171	294.2	19.4	44684
International transport (air)	976	3.51	32.9	10864
International transport (sea)	1621	41.8	40.9	14846

^{a)} Calculated in CO₂ equivalents. Referring to the fourth IPCC assessment report (IPCC, 2007), 1 g CH₄ and 1 g N₂O has the greenhouse effect of 25 and 298 g CO₂, respectively.

Table 2.2 Emissions 2020 reported to the LRTAP Convention.

	SO ₂ (Mg)	NO _x (Mg)	NM VOC (Mg)	CO (Mg)	NH ₃ (Mg)	TSP (Mg)	PM ₁₀ (Mg)	PM _{2.5} (Mg)	BC (Mg)
1. Energy	7156	69114	26602	184391	2251	12484	10979	9950	1840
2. Industrial processes and product use	1006	54	33184	2393	357	7096	2761	750	7
3. Agriculture	28	19753	46219	3799	72959	64428	8541	1291	28
5. Waste	955	104	578	1367	688	319	318	318	0
Total national	9145	89025	106584	191949	76254	84326	22599	12310	1876
International transport (air) ¹	312	4714	74	890	0	48	48	48	21
International transport (sea)	1022	37637	1351	3975	0	1048	1038	1033	67

Table 2.3 Heavy metal emissions 2020 reported to the LRTAP Convention.

	As (kg)	Cd (kg)	Cr (kg)	Cu (kg)	Hg (kg)	Ni (kg)	Pb (kg)	Se (kg)	Zn (kg)
1. Energy	168	597	1345	38160	223	2531	7481	354	46929
2. Industrial processes and product use	48	20	156	1999	4	160	1825	32	1991
3. Agriculture	0.4	50	4.6	4.2	8.0	3.0	6.3	1.1	32
5. Waste	2.9	5.8	12	76	1.8	7.5	2165	0.3	8445
Total national	220	673	1517	40239	237	2701	11477	388	57397
International transport (air) ¹	0	0	0	0	0	0	0	0	0
International transport (sea)	108	9	50	108	13	5532	69	139	329

Table 2.4 PAH emissions 2020 reported to the LRTAP Convention.

	HCB (g)	PCDD/ PCDF (dioxins/furans) (g)	Benzo(a) pyrene (kg)	Benzo(b) fluoranthene (kg)	Benzo(k) fluoranthene (kg)	Indeno (1,2,3-cd) pyrene (kg)	PCBs (g)
1. Energy	21722	1245	1328	808	752	297	21722
2. Industrial processes and product use	148	15	15	8.8	10	51	148
3. Agriculture	33	23	65	27	38	0	33
5. Waste	8545	58	72	53	82	26	8545
Total national	30449	1341	1480	898	882	374	30449
International transport (air) ¹	0	0	0	0	0	986	0
International transport (sea)	0.1	0.3	18	4.9	2.6	0	1635

2.2 International conventions and reduction targets

Denmark is a party to two international conventions and two EU directives with regard to emissions from road transport and other mobile sources:

- The UNECE Convention on Long Range Transboundary Air Pollution (LRTAP Convention or the Geneva Convention)
- The National Emission Ceilings Directive (NECD) (Directive 2016/2284/EU)
- The UN Framework Convention on Climate Change (UNFCCC) and the Kyoto Protocol

¹ Emissions for international aviation reported to the LRTAP convention, comprise the emissions from domestic and international LTO, cf. Chapter 3.

- The EU Monitoring Mechanism Regulation (Regulation (EU) No 525/2013)

The LRTAP Convention is a framework convention and has been expanded to cover eight protocols:

- EMEP (The European Monitoring and Evaluation Programme) Protocol, 1984 (Geneva)
- Protocol on Reduction of Sulphur Emissions, 1985 (Helsinki)
- Protocol concerning the Control of Emissions of Nitrogen Oxides, 1988 (Sofia)
- Protocol concerning the Control of Emissions of Volatile Organic Compounds, 1991 (Geneva)
- Protocol on Further Reduction of Sulphur Emissions, 1994 (Oslo)
- Protocol on Heavy Metals, 1998 (Aarhus), as amended in 2012
- Protocol on Persistent Organic Pollutants (POPs), 1998 (Aarhus), as amended in 2009
- Protocol to Abate Acidification, Eutrophication and Ground-level Ozone, 1999 (Gothenburg), as amended in 2012

The emission ceilings included in the original Gothenburg Protocol (in brackets) are valid for 2010 and subsequent years and the following pollutants: SO₂ (55 Gg), NO_x (127 Gg), NMVOC (85 Gg) and NH₃ (69 Gg).

Further, in the original EU NECD ("The National Emission Ceilings Directive") the national emission ceilings given in the Gothenburg protocol, has been implemented.

The revised version of the Gothenburg Protocol as well as the revised NECD includes reduction commitments relative to the emission level in 2005. The reduction commitments (in brackets) for 2020 are set for the following pollutants: SO₂ (35 %), NO_x (56 %), NMVOC (35 %), NH₃ (24 %), and PM_{2.5} (33 %).

Additionally, the revised NECD included reduction commitments for 2030 relative to the emission level in 2005. The reduction commitments (in brackets) for 2030 are set for the following pollutants: SO₂ (59 %), NO_x (68 %), NMVOC (37 %), NH₃ (24 %), and PM_{2.5} (55 %).

The UN Framework Convention on Climate Change (UNFCCC) - also called the Climate Convention - is a framework convention from 1992. The Kyoto Protocol is a protocol to the Climate Convention.

The Kyoto Protocol sets legally binding emission targets and time-tables for six greenhouse gases: CO₂, CH₄, N₂O, HFC (hydrofluorocarbon), PFC (perfluorocarbon) and SF₆ (sulphur hexafluoride); for the second commitment period, NF₃ (nitrogen trifluoride) was added. The greenhouse gas emission of each of the six pollutants is combined to CO₂ equivalents, which can be summed up to produce total greenhouse gas (GHG) emissions in CO₂ equivalents. Under the EU burden sharing agreement for the first commitment period (2008-2012), Denmark is obligated to reduce the average GHG emissions by 21 % compared to the base year (1995 for f-gases, 1990 for all other gases).

For the second commitment period (2013-2020) under the Kyoto Protocol, the EU has a joint target of 20 % reduction. For the entire EU this means that emissions covered by the European Union Emission Trading Scheme (EU ETS) are

to be reduced by 24 %. The reduction commitment for the non-ETS sectors (e.g. transport and agriculture) has been established for each Member State in the Effort Sharing Decision. In this decision, Denmark is obligated to reduce emissions in the non-ETS sectors by 20 % in the period 2013-2020 compared to the level in 2005.

EU is Party in the UNFCCC and the Kyoto Protocol and, thereby, EU Member States are obligated to submit emission data to the European Commission. For the first commitment period, this was regulated by the Monitoring Mechanism Decision. This was updated for the second commitment period, so that now the EU Monitoring Mechanism Regulation is the legislation in place to ensure that the EU can meet its obligations under the UNFCCC and Kyoto Protocol.

3 Inventory structure

In the Danish emission inventories, all activity rates and emissions are defined in SNAP (Selected Nomenclature for Air Pollution) sector categories. The emission inventories are compiled using the software tool CollectER (Pulles et al., 2009) supported by the European Environment Agency.

For mobile sources, the aggregation of emission results into the formats used by the UNFCCC and UNECE Conventions is made by using the code correspondence information shown in Table 3.1. In the case of mobile sources, the CRF (Common Reporting Format) and NFR (Nomenclature for Reporting) used by the UNFCCC and UNECE Conventions, respectively, are similar.

Table 3.1 SNAP – CRF/NFR correspondence table for mobile sources.

SNAP classification	CRF/NFR classification
0701 Road traffic: Passenger cars	1A3bi Road transport: Passenger cars
0702 Road traffic: Light duty vehicles	1A3bii Road transport: Light duty vehicles
0703 Road traffic: Heavy duty vehicles	1A3biii Road transport: Heavy duty vehicles
0704/0705 Road traffic: Mopeds and motor cycles	1A3biv Road transport: Mopeds & motorcycles
0706 Road traffic: Evaporation	1A3bv Road transport: Evaporation
0707 Road traffic: Brake and tire wear	1A3bvi Road transport: Brake and tire wear
0708 Road traffic: Road abrasion	1A3bvii Road transport: Road abrasion
0801 Military	1A5b Other, Mobile
0802 Railways	1A3c Railways
0803 Inland waterways	1A5b Other, Mobile
080402 National sea traffic	1A3dii National navigation (Shipping)
080403 National fishing	1A4ciii Agriculture/Forestry/Fishing: National fishing
080404 International sea traffic	1A3di (i) International navigation (Shipping)
080501 Dom. airport traffic (LTO < 1000 m)	1A3aii (i) Civil aviation (Domestic, LTO)
080502 Int. airport traffic (LTO < 1000 m)	1A3ai (i) Civil aviation (International, LTO)
080503 Dom. cruise traffic (> 1000 m)	1A3aii (ii) Civil aviation (Domestic, Cruise)
080504 Int. cruise traffic (> 1000 m)	1A3ai (ii) Civil aviation (International, Cruise)
0806 Agriculture	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0807 Forestry	1A4cii Agriculture/Forestry/Fishing: Off-road agriculture/forestry
0808 Industry	1A2gvii Manufacturing industries/Construction (mobile)
0809 Household and gardening	1A4bii Residential: Household and gardening (mobile)
0811 Commercial and institutional	1A4aii Commercial/Institutional: Mobile

Military transport activities (land and air) refer to the CRF/NFR sector Other (1A5), the latter sector also including recreational craft (SNAP code 0803).

Road traffic evaporation, brake and tire wear, and road abrasion (SNAP codes 0706-0708) is not a part of the CRF list since no greenhouse gases are emitted from these sources.

Emissions from lubricants during use are reported under 2D3 as per the UNFCCC reporting guidelines. Two-stroke engines in road transport are only relevant for mopeds and motorcycles (and the odd veteran vehicle) and even in these categories, four-stroke engines have gained popularity in part due to environmental considerations. The Danish energy statistics only include lubricants for non-energy purposes and any consumption in two-stroke mopeds/motorcycles will be negligible and fall far below the threshold of significance.

For aviation, LTO (Landing and Take Off)² refers to the part of flying which is below ≈ 1000 m (3000 ft.). This part of the aviation emissions (SNAP codes 080501 and 080502) are included in the national emissions total as prescribed by the UNECE reporting guidelines. According to the UNFCCC, the national emissions for aviation comprise the emissions from domestic LTO (080501) and domestic cruise (080503). The fuel consumption and emission development explained in Chapter 6 are based on these latter results.

Agricultural and forestry non-road machinery (SNAP codes 0806 and 0807) is accounted for in the Agriculture/forestry (1A4cii) sector. Fishing activities (SNAP code 080403) regardless of vessel flag is reported under 1A4ciii.

For mobile sources, internal database models for road transport, air traffic, sea transport and non-road machinery have been set up at Department of Environmental Science (ENVS)/Danish Centre for Environment and Energy (DCE), Aarhus University (former NERI), in order to produce the emission inventories. The output results from the DCE models are calculated in a SNAP format, as activity rates (fuel consumption) and emission factors, which are then exported directly to the central Danish CollectER database.

Apart from national inventories, the DCE models are used also as a calculation tool in research projects, environmental impact assessment studies, and to produce basic emission information, which requires various aggregation levels.

² A LTO cycle consists of the flying modes approach/descent, taxiing, take off and climb out. In principle, the actual times-in-modes rely on the actual traffic circumstances, the airport configuration, and the aircraft type in question.

4 Input data and calculation methods for road transport

For road transport, the detailed methodology (Tier 3) is used to make annual estimates of the Danish emissions, as described in the EMEP/EEA Air Pollutant Emission Inventory Guidebook (EMEP/EEA, 2019). The actual calculations are made with a model developed by ENVIS, using the European COPERT 5 model methodology (EMEP/EEA, 2019). In COPERT, fuel consumption and emission simulations can be made for operationally hot engines, taking into account gradually stricter emission standards and emission degradation due to catalyst wear. Furthermore, the emission effects of cold-start and evaporation are simulated.

4.1 Vehicle fleet and mileage data

Corresponding to the COPERT 5 fleet classification, all present and future vehicles in the Danish fleet are grouped into vehicle classes, sub-classes and layers. The layer classification is a further division of vehicle sub-classes into groups of vehicles with the same average fuel consumption and emission behaviour, according to EU emission legislation levels. Table 4.1 gives an overview of the different model classes and sub-classes, and the layer level with implementation years are shown in Annex 1.

Fleet and annual mileage data are provided by DTU Transport for the vehicle categories present in COPERT 5 (Jensen, 2021). DTU Transport use data from the Danish vehicle register kept by Statistics Denmark. The vehicle register data consist of vehicle type (passenger cars, vans, trucks, buses, mopeds, motorcycles), fuel type, vehicle weight, gross vehicle weight, engine size (passenger cars registered from 2005+), Euro norm, NEDC type approval fuel efficiency value (passenger cars registered from 1997+) and vehicle first registration year. The Euro norm information is very complete in the Danish vehicle register for vehicle first registrations 2001 onwards for trucks and buses and 2011 onwards in the case of passenger cars and vans. For vehicles with no EU norm information, the EU norm is assigned, associated with the date for first registration (entry into service) listed in Table 4.2.

In order to establish engine size data for passenger cars registered before 2005, a weight class-engine size transformation key is used examined by Cowi (2008) for new Danish cars from 1998. For the years before 1998, data for 1998 is used, and for the years 1999-2004, a linear interpolation between 1998 and 2005 weight class-engine size relations is used. For trucks, truck driver registration notes gathered by Statistics Denmark are used to split the fleet figures of ordinary trucks into number of solo trucks and truck-trailer combinations. Further, the registration notes make it possible to assume the average total vehicle weight of the truck trailer combination. For articulated trucks also, the registration notes make it possible to assume the average total vehicle weight of the full articulated truck.

Danish mileage data comes from the Danish Road Directorate based on the Danish vehicle inspection program. Total mileage per year and vehicle category are derived for the years 1985-2020, together with a more detailed mileage matrix examined for the year 2008 (based on detailed vehicle inspection

data analysis). The detailed mileage matrix contains annual mileage per vehicle subcategory for new vehicles and for every vintage back in time, which determines the yearly mileage reduction percentages as a function of vehicle age. In a first step, the detailed mileage matrix is combined with corresponding fleet numbers in order to estimate intermediate total mileages for each year on a detailed fleet level. Next, each year's detailed (intermediate) mileage figures are scaled according to the difference between true and intermediate total mileage per vehicle subcategory.

DTU Transport (Jensen, 2021) also provides information of the mileage split between urban, rural and highway driving based on traffic monitoring data. The respective average speeds come from The Danish Road Directorate (e.g. Winther & Ekman, 1998). Additional data for the moped fleet and motorcycle fleet disaggregation is given by The National Motorcycle Association (Markamp, 2013) and supplementary moped stock information is obtained from The Danish Bicycle Traders Association (Johnsen, 2018) and Prince (2021).

Table 4.1 Model vehicle classes and sub-classes and trip speeds.

Vehicle classes	Fuel type	Engine size/weight	Trip speed [km per h]		
			Urban	Rural	Highway
PC	Gasoline	< 0.8 l.	40	70	100
PC	Gasoline	0.8 - 1.4 l.	40	70	100
PC	Gasoline	1.4 – 2 l.	40	70	100
PC	Gasoline	> 2 l.	40	70	100
PC	Diesel	< 0.8 l.	40	70	100
PC	Diesel	0.8 - 1.4 l.	40	70	100
PC	Diesel	< 1.4 - 2 l.	40	70	100
PC	Diesel	> 2 l.	40	70	100
PC	2-stroke		40	70	100
PC	LPG		40	70	100
PC	CNG		40	70	100
PC	Plug-in hybrid		40	70	100
LCV	Gasoline	<1305 kg	40	65	80
LCV	Gasoline	1305-1760 kg	40	65	80
LCV	Gasoline	>1760 kg	40	65	80
LCV	Diesel	<1305 kg	40	65	80
LCV	Diesel	1305-1760 kg	40	65	80
LCV	Diesel	>1760 kg	40	65	80
LCV	LPG	<1305 kg	40	65	80
LCV	LPG	1305-1760 kg	40	65	80
LCV	LPG	>1760 kg	40	65	80
LCV	CNG	<1305 kg	40	65	80
LCV	CNG	1305-1760 kg	40	65	80
LCV	CNG	>1760 kg	40	65	80
LCV	Plug-in hybrid	<1305 kg	40	65	80
LCV	Plug-in hybrid	1305-1760 kg	40	65	80
LCV	Plug-in hybrid	>1760 kg	40	65	80
Trucks	Gasoline		35	60	80
Trucks	Diesel/CNG	Rigid 3,5 - 7,5t	35	60	80
Trucks	Diesel/CNG	Rigid 7,5 - 12t	35	60	80
Trucks	Diesel/CNG	Rigid 12 - 14 t	35	60	80
Trucks	Diesel/CNG	Rigid 14 - 20t	35	60	80
Trucks	Diesel/CNG	Rigid 20 - 26t	35	60	80
Trucks	Diesel/CNG	Rigid 26 - 28t	35	60	80
Trucks	Diesel/CNG	Rigid 28 - 32t	35	60	80
Trucks	Diesel/CNG	Rigid >32t	35	60	80
Trucks	Diesel/CNG	TT/AT 14 - 20t	35	60	80
Trucks	Diesel/CNG	TT/AT 20 - 28t	35	60	80
Trucks	Diesel/CNG	TT/AT 28 - 34t	35	60	80
Trucks	Diesel/CNG	TT/AT 34 - 40t	35	60	80
Trucks	Diesel/CNG	TT/AT 40 - 50t	35	60	80
Trucks	Diesel/CNG	TT/AT 50 - 60t	35	60	80
Trucks	Diesel/CNG	TT/AT >60t	35	60	80
Urban buses	Gasoline		30	50	70
Urban buses	Diesel/CNG	< 15 tonnes	30	50	70
Urban buses	Diesel/CNG	15-18 tonnes	30	50	70
Urban buses	Diesel/CNG	> 18 tonnes	30	50	70
Coaches	Gasoline		35	60	80
Coaches	Diesel/CNG	< 15 tonnes	35	60	80
Coaches	Diesel/CNG	15-18 tonnes	35	60	80
Coaches	Diesel/CNG	> 18 tonnes	35	60	80
Mopeds	Gasoline		30	30	-
Motorcycles	Gasoline	2 stroke	40	70	100
Motorcycles	Gasoline	< 250 cc.	40	70	100
Motorcycles	Gasoline	250 – 750 cc.	40	70	100
Motorcycles	Gasoline	> 750 cc.	40	70	100

In addition, data from a survey made by the Danish Road Directorate (Hansen, 2010) has given information of the total mileage driven by foreign cars,

vans, coaches and trucks on Danish roads in 2009 and a follow-up survey in 2014 has given additional information. For trucks, the mileage contribution from foreign vehicles has been added to the total mileage on Danish roads for Danish truck-trailers and articulated trucks in two gross vehicle weight categories, < 40 tonnes and > 40 tonnes. The data has been further processed by DTU Transport; by using appropriate assumptions, the mileage have been backcasted to 1985 and forecasted to 2020.

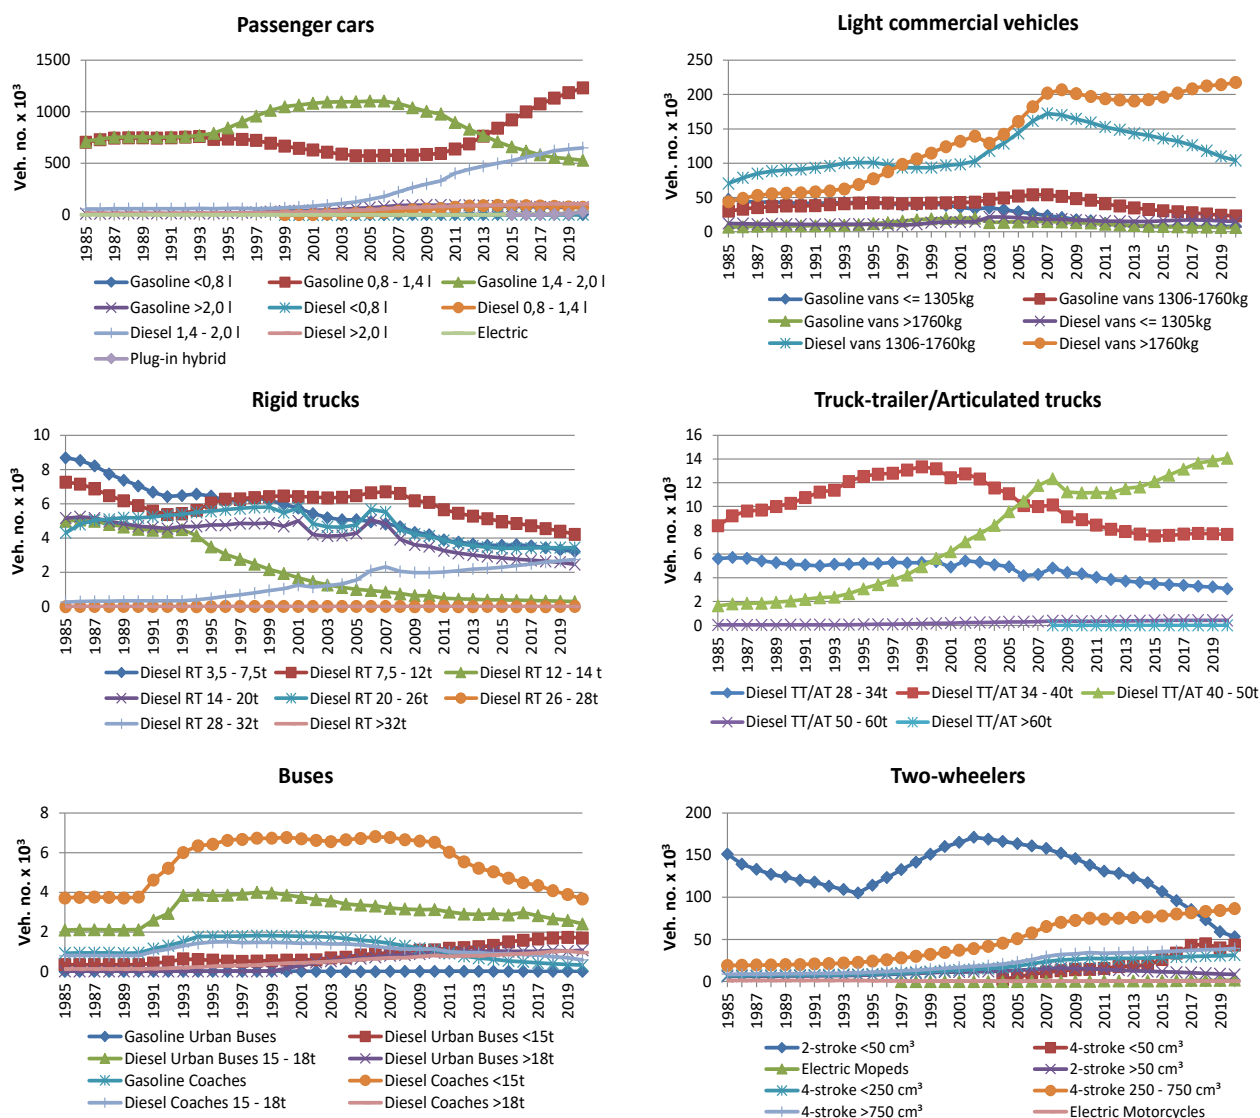


Figure 4.1 Number of vehicles in sub-classes in 1985-2020.

For passenger cars, the engine size differentiation is less certain for the years before 2005. The increase in the total number of passenger cars is mostly due to a growth in the number of diesel cars between 1.4 and 2 litres (from the 2000s up to now). Until 2005, there has been a decrease in the number of gasoline cars with an engine size between 0.8 and 1.4 litres. These cars, however, have also increased in numbers during the later years, while the number of 1.4-2 litres gasoline cars has decreased. Since the late 1990s small cars (< 0.8 l gasoline and <1.4 l. diesel) has slowly begun to penetrate the fleet.

There has been a considerable growth in the number of diesel light-duty vehicles from 1985 to 2006; the number of vehicles has however decreased somewhat after 2006 due to the restructuring of car taxes that made it less advantageous buying vans for private use.

For the truck-trailer and articulated truck combinations, there is a tendency towards the use of increasingly fewer but larger trucks throughout the time-period. The decline in fleet numbers for many of the truck categories is due to the combined effects of the global financial crisis, the fleet shift towards fewer and larger trucks, international market competition (foreign transport companies are effectively gaining Danish market shares), and the reflagging of Danish commercial trucks to companies based in the neighbouring countries.

The sudden change in the level of urban bus and coach numbers from 1991 to 1995 is due to uncertain fleet data from Statistics Denmark.

The reason for the significant growth in the number of mopeds from 1994 to 2002 is the introduction of the so-called Moped 45 vehicle type. From 2004 onwards there is a gradual switch from 2-stroke to 4-stroke in new sales for this vehicle category. For motorcycles, the number of vehicles has grown throughout the 1985-2010 period, and from 2012-2020. The vehicle numbers are summed up in layers for each year (Figure 4.2):

$$N_{j,y} = \sum_{i=FYear(j)}^{LYear(j)} N_{i,y} \quad (1)$$

Where N = number of vehicles, j = layer, y = year, i = first year of registration.

Weighted annual mileages per layer are calculated as the sum of all mileage driven per first registration year divided by the total number of vehicles in the specific layer.

$$M_{j,y} = \frac{\sum_{i=FYear(j)}^{LYear(j)} N_{i,y} \cdot M_{i,y}}{\sum_{i=FYear(j)}^{LYear(j)} N_{i,y}} \quad (2)$$

Since 2006, economical incitements have been given to private vehicle owners to buy Euro 5 diesel passenger cars and vans in order to bring down the particulate emissions from diesel vehicles. The estimated sales between 2006 and 2010 have been examined by the Danish EPA and are included in the fleet data behind the Danish inventory (Winther, 2011).

Vehicle numbers and weighted annual mileages per layer are shown in Annex 1 and 2 for 1985-2020. The trends in vehicle numbers per layer are also shown in Figure 4.2. The latter figure shows how vehicles complying with the gradually stricter EU emission levels (EURO 1-6, Euro I-VI etc.) have been introduced into the Danish motor fleet.

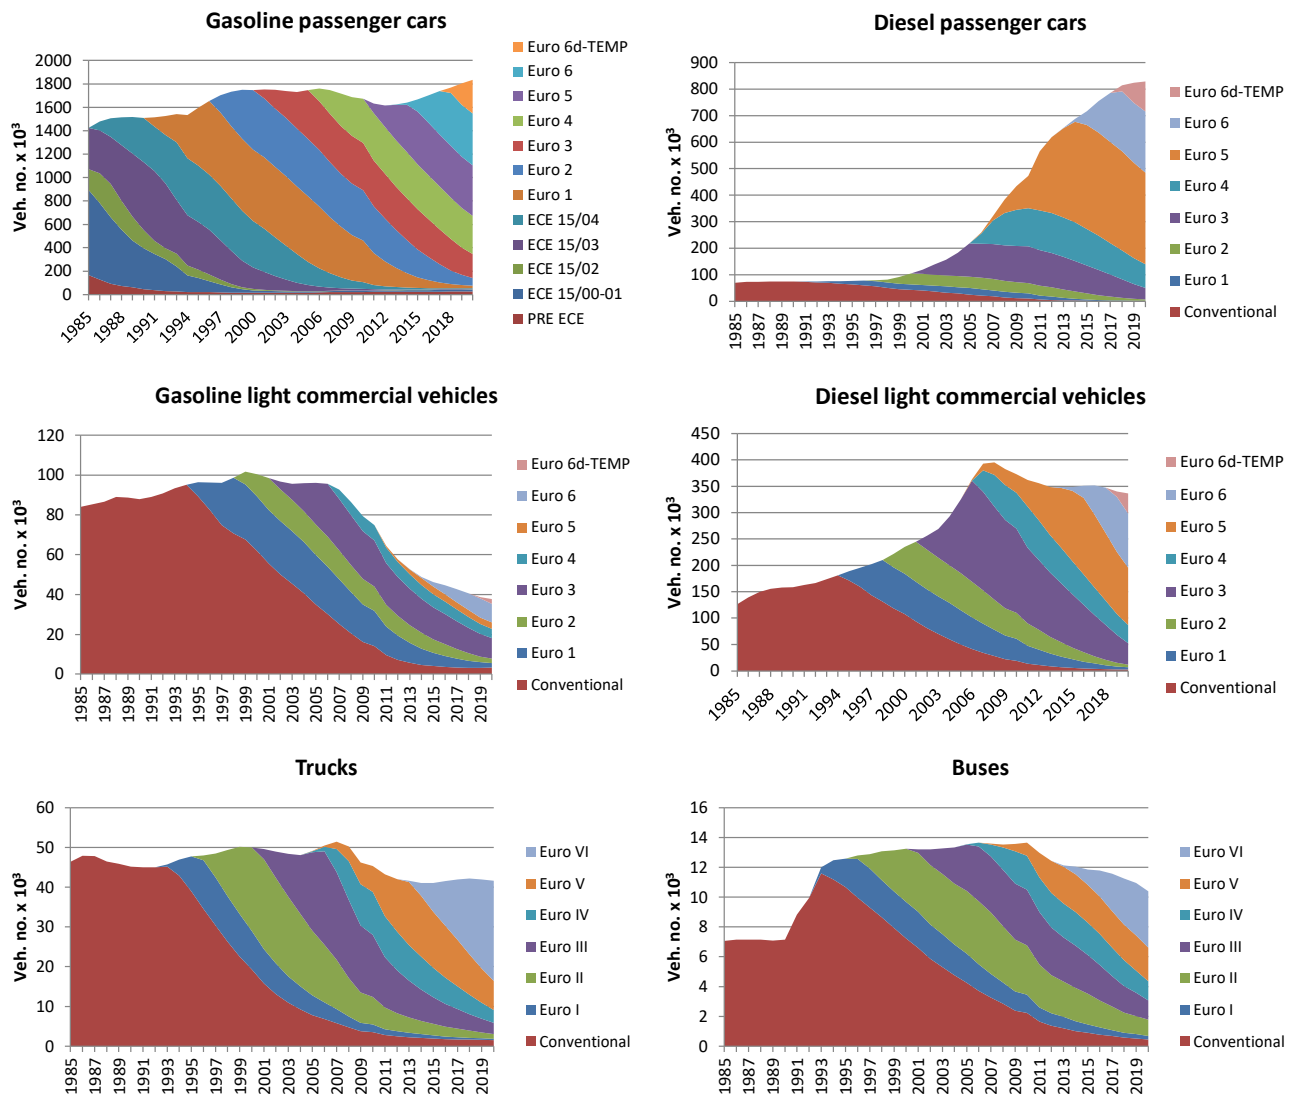


Figure 4.2 Layer distribution of vehicle numbers per vehicle type in 1985-2020.

4.2 Emission legislation

The EU 443/2009 regulation established new emission performance standards for new passenger cars as part of the Community's integrated approach to reduce CO₂ emissions from light-duty vehicles. Some key elements of the adopted text are as follows:

- **Limit value curve:** the fleet average to be achieved by all cars registered in the EU is 130 gram CO₂ per kilometre (g per km). A so-called limit value curve implies that heavier cars are allowed higher emissions than lighter cars while preserving the overall fleet average.
- **Further reduction:** a further reduction of 10 g CO₂ per km, or equivalent if technically necessary, will be delivered by other technological improvements and by an increased use of sustainable biofuels.
- **Phasing-in of requirements:** in 2012, 65 % of each manufacturer's newly registered cars must comply on average with the limit value curve set by the legislation. This will rise to 75 % in 2013, 80 % in 2014, and 100 % from 2015 onwards.
- **Lower penalty payments for small excess emissions until 2018:** if the average CO₂ emissions of a manufacturer's fleet exceed its limit value in any year from 2012, the manufacturer has to pay an excess emissions premium

for each car registered. This premium amounts to €5 for the first g per km of exceedance, €15 for the second g per km, €25 for the third g per km, and €95 for each subsequent g per km. From 2019, already the first g per km of exceedance will cost €95.

- **Long-term target:** a target of 95g CO₂ per km is specified for the year 2021.
- **Eco-innovations:** Manufacturers can be granted a maximum of 7g per km of emission credits on average for their fleet if they equip vehicles with innovative technologies, based on independently verified data.

The EU 510/2011 regulation established new emission performance standards for new light commercial vehicles (vans). Some key elements of the regulation are as follows:

- **Target dates:** the EU fleet average of 175 g CO₂ per km will be phased in between 2014 and 2017. In 2014, an average of 70 % of each manufacturer's newly registered vans must comply with the limit value curve set by the legislation. This proportion will rise to 75 % in 2015, 80 % in 2016, and 100 % from 2017 onwards.
- **Limit value curve:** emissions limits are set according to the mass of vehicle, using a limit value curve. The curve is set in such a way that a fleet average of 175 grams of CO₂ per kilometre is achieved. A so-called limit value curve of 100 % implies that heavier vans are allowed higher emissions than lighter vans while preserving the overall fleet average. Only the fleet average is regulated, so manufacturers will still be able to make vehicles with emissions above the limit value curve provided these are balanced by other vehicles, which are below the curve.
- **Vehicles affected:** the vehicles affected by the legislation are vans, which account for around 12 % of the market for light-duty vehicles. This includes vehicles used to carry goods weighing up to 3.5t (vans and car-derived vans, known as N1) and which weigh less than 2610 kg when empty.
- **Long-term target:** a target of 147g CO₂ per km is specified for the year 2020.
- **Excess emissions premium for small excess emissions until 2018:** if the average CO₂ emissions of a manufacturer's fleet exceed its limit value in any year from 2014, the manufacturer has to pay an excess emissions premium for each van registered. This premium amounts to €5 for the first g per km of exceedance, €15 for the second g per km, €25 for the third g per km, and €95 for each subsequent g per km. From 2019, the first g per km of exceedance will cost €95. This value is equivalent to the premium for passenger cars.
- **Super-credits:** vehicles with extremely low emissions (below 50g per km) will be given additional incentives whereby each low-emitting van will be counted as 3.5 vehicles in 2014 and 2015, 2.5 in 2016 and 1.5 vehicles in 2017.
- **Eco-innovations:** Manufacturers can be granted a maximum of 7g per km of emission credits on average for their fleet if they equip vehicles with innovative technologies, based on independently verified data.
- **Other flexibilities:** manufacturers may group together to form a pool and act jointly in meeting the specific emissions targets. Independent manufacturers who sell fewer than 22,000 vehicles per year can also apply to the Commission for an individual target instead.

On 17 April 2019, the European Parliament and the Council adopted Regulation (EU) 2019/631 setting CO₂ emission performance standards for new passenger cars and for new light commercial vehicles (vans) in the EU.

This Regulation started applying on 1 January 2020, replacing and repealing the former Regulations setting CO₂ emission standards for cars ((EC) 443/2009) and vans ((EU) 510/2011).

The following description of the regulation (EU) 2019/631 is given on the EU Commission Climate Action web page (https://ec.europa.eu/clima/policies/transport/vehicles/regulation_en). The main elements of the regulation are:

Target levels

New EU fleet-wide CO₂ emission targets are set for the years 2025 and 2030, both for newly registered passenger cars and for newly registered vans.

These targets are defined as a percentage reduction from the 2021 starting points:

- Cars: 15% reduction from 2025 on and 37.5% reduction from 2030 on,
- Vans: 15% reduction from 2025 on and 31% reduction from 2030 on.

The specific emission targets for manufacturers to comply with are based on the EU fleet-wide targets, taking into account the average test mass of a manufacturer's newly registered vehicles.

Incentive mechanism for zero- and low-emission vehicles (ZLEV)

A ZLEV is defined in the regulation as a passenger car or a van with CO₂ emissions between 0 and 50 g/km.

To incentivise the uptake of ZLEV, a crediting system is introduced from 2025 on.

The specific CO₂ emission target of a manufacturer will be relaxed if its share of ZLEV registered in a given year exceeds the following benchmarks:

- Cars: 15 % ZLEV from 2025 on and 35 % ZLEV from 2030 on,
- Vans: 15 % ZLEV from 2025 on and 30 % ZLEV from 2030 on.

A one-percentage point exceedance of the ZLEV benchmark will increase the manufacturer's CO₂ target (in g CO₂ per km) by one percent. The target relaxation is capped at maximum 5 % to safeguard the environmental integrity of the regulation.

For calculating the ZLEV share in a manufacturer's fleet, an accounting rule applies. This gives a greater weight to ZLEV with lower CO₂ emissions.

In addition, for cars only, during the period 2025 to 2030, a greater weight is given to ZLEV registered in Member States with a low ZLEV uptake in 2017, and this as long as the ZLEV share in the Member State's fleet of newly registered cars does not exceed 5 %.

Pooling, exemptions and derogations

The provisions on pooling between manufacturers are the same as under the previous regulations. Pooling between car and van manufacturers is not possible.

The exemption of manufacturers registering less than 1,000 cars or vans per year, as well as the derogation possibility for “small volume” car and van manufacturers, have also been maintained.

The derogation possibility for “niche” car manufacturers, i.e. those registering between 10,000 and 300,000 cars per year, will end after the year 2028. In the years 2025 to 2028, the derogation target for those manufacturers will be 15 % below the 2021 derogation target.

Eco-innovations

The provisions regarding the “eco-innovation” credits for emission savings due to the application of innovative emission reduction technologies not covered by the standard test cycle CO₂ measurement are largely unchanged compared to the previous regulations.

New is that the efficiency improvements for air conditioning systems will become eligible as eco-innovation technologies as of 2025 and that the cap of 7 g per km may be adjusted by the Commission through a delegated act.

Governance

Two new elements have been introduced to reinforce the effectiveness of the regulation. These concerns:

- the verification of CO₂ emissions of vehicles in-service and
- measures to ensure that the emission test procedure yields results which are representative of real-world emissions.

In-service verification

Manufacturers are required to ensure correspondence between the CO₂ emissions recorded in the certificates of conformity of their vehicles and the CO₂ emissions of vehicles in-service measured according to “World-Harmonized Light-Duty Vehicles Test Procedure” (WLTP).

This correspondence shall be verified by type-approval authorities in selected vehicles. The authorities shall also verify the presence of any strategies artificially improving the vehicle’s performance in the type-approval tests.

On the basis of their findings, type-approval authorities shall, where needed, ensure the correction of the certificates of conformity and may take other necessary measures set out in the Type Approval Framework Regulation.

Deviations found in the CO₂ emissions of vehicles in service shall be reported to the Commission, who shall take them into account for the purpose of calculating the average specific emissions of a manufacturer.

Real-world emissions

To prevent the gap between emissions tested in the laboratory and real-world emissions from increasing, the Commission shall, from 2021 on, regularly collect data on the real-world CO₂ emissions and energy consumption of cars and vans using the on-board fuel consumption monitoring devices (OBFCM).

The Commission shall monitor how that gap evolves between 2021 and 2026 and, on that basis, assess the feasibility of a mechanism to adjust the manufacturer’s average specific CO₂ emissions as of 2030.

The detailed procedures for collecting and processing the data shall be adopted by means of implementing acts.

Life-cycle emissions

By 2023, the Commission shall evaluate the possibility of developing a common methodology for the assessment and reporting of the full life-cycle CO₂ emissions of cars and vans.

Review

The Commission shall review the effectiveness of the regulation and report on this to the European Parliament and the Council.

This review shall cover i.a. the following:

- real world representativeness of the CO₂ emission and energy consumption values,
- deployment of ZLEV,
- roll-out of recharging and refuelling infrastructure,
- role of synthetic and advanced alternative fuels produced with renewable energy,
- emission reductions observed for the existing fleet,
- ZLEV incentive mechanism,
- impacts for consumers,
- aspects related to the just transition,
- impacts for consumers, aspects related to the just transition,
- 2030 targets and identification of a pathway for emission reductions beyond 2030.

As part of the review, the Commission shall assess the feasibility of developing real-world emission test procedures, as well as the possibility to assign revenues from the fines to a specific fund or relevant programme with the objective to ensure a just transition towards a climate neutral economy.

Finally, the Commission shall review the Car Labelling Directive by end 2020, covering both CO₂ and air pollutant emissions of cars and evaluating the options for introducing a fuel economy and CO₂ emissions label for vans.

The Regulation (EU) 2019/1242 setting CO₂ emission standards for heavy-duty vehicles entered into force on 14 August 2019.

The following description of the EU regulation 2019/1242 is taken from the EU Commission Climate Action web page (https://ec.europa.eu/clima/policies/transport/vehicles/heavy_en). The main elements of the regulation are:

Target levels

From 2025 on, manufacturers will have to meet the targets set for the fleet-wide average CO₂ emissions of their new lorries registered in a given calendar year. Stricter targets will start applying from 2030 on.

The targets are expressed as a percentage reduction of emissions compared to EU average in the reference period (1 July 2019–30 June 2020):

- from 2025 onwards: 15% reduction,
- from 2030 onwards: 30% reduction.

The 2025 target can be achieved using technologies that are already available on the market. The 2030 target will be assessed in 2022 as part of the review of the regulation.

As a first step, the CO₂ emission standards will cover large lorries, which account for 65% to 70% of all CO₂ emissions from heavy-duty vehicles.

As part of the 2022 review, the Commission should assess the extension of the scope to other vehicle types such as smaller lorries, buses, coaches and trailers.

Incentive mechanism for zero- and low-emission vehicles (ZLEV)

The regulation includes an incentive mechanism for

- zero-emission vehicles (ZEV), lorries with no tailpipe CO₂ emissions;
- low-emission vehicles (LEV), lorries with a technically permissible maximum laden mass of more than 16 t, with CO₂ emissions of less than half of the average CO₂ emissions of all vehicles in its group registered in the 2019 reporting period.

To incentivise the uptake of ZLEV and reward early action, a super-credits system applies from 2019 until 2024, and can be used to comply with the target in 2025. A multiplier of two applies for ZEV, and a multiplier between one and two applies for LEV, depending on their CO₂ emissions. An overall cap of 3 % is set to preserve the environmental integrity of the system.

From 2025 onwards, the super-credits system is replaced by a benchmark-based crediting system, with a benchmark set at 2 %. The 2030 benchmark level will have to be set in the context of the 2022 review.

As a result, the average specific CO₂ emissions of a manufacturer are adjusted downwards if the share of ZLEV in its entire new heavy-duty vehicles fleet exceeds the 2 % benchmark, out of which at least 0.75 percentage points have to be vehicles subject to the CO₂ targets, i.e. the largest vehicles. Each percentage point of exceedance of the benchmark will decrease the manufacturer's average specific CO₂ emissions by one percent.

In both systems, ZEV not subject to the CO₂ targets are accounted in the incentive mechanism. Buses and coaches are excluded from the scheme. The ZEV not subject to the CO₂ targets can contribute to a maximum of 1.5 % CO₂ emissions reduction.

Cost-effective achievement of targets

The regulation includes several elements to support cost-effective implementation:

- Banking and borrowing to take account of long production cycles, including a reward for early action, while maintaining the environmental integrity of the targets;
- Full flexibility for manufacturers to balance emissions between the different groups of vehicles within their portfolio;
- Vocational vehicles, such as garbage trucks and construction vehicles, are exempted due to their limited potential for cost-efficient CO₂ reduction.

Governance

The following measures will ensure the effectiveness and enforcement of the targets. They are based on the experience from cars and vans:

- Assess the robustness and representativeness of the reference CO₂ emissions as a basis for calculating the EU fleet-wide emissions targets;
- Collect, publish and monitor real-world fuel consumption data reported by manufacturers, based on mandatory standardised fuel consumption meters;
- Introduce in-service conformity tests and mandate the reporting of deviations and the introduction of a correction mechanism
Apply financial penalties in case of non-compliance with the CO₂ targets. The level of the penalties is set to 4,250 euro per gCO₂ per tkm in 2025 and 6,800 euro per gCO₂ per tkm in 2030.

Review

The Commission shall review the effectiveness of the regulation and report on this to the European Parliament and the Council by 2022.

This review shall cover i.a.

- 2030 target and possible targets for 2035 and 2040;
- inclusion of other types of heavy-duty vehicles, including buses, coaches, trailers, vocational vehicles and considerations of EMS (European modular system);
- ZLEV incentive mechanism;
- real world representativeness of the CO₂ emission and energy consumption values;
- role of synthetic and advanced alternative fuels produced with renewable energy;
- possible introduction of a form of pooling;
- level of the excess emission premium.

By 2023, the Commission shall evaluate the possibility of developing a common methodology for the assessment and reporting of the full life-cycle CO₂ emissions of heavy-duty vehicles.

Monitoring and reporting of CO₂ emissions from heavy-duty vehicles

The following measures enable the implementation of the emission standards:

- Certification Regulation on the determination of the CO₂ emissions and fuel consumption of new lorries;
- Regulation (EU) 2018/956 on monitoring and reporting.

The monitoring and reporting regulation requires that, as of 1 January 2019:

- Member States monitor and report to the Commission information on the heavy-duty vehicles registered for the first time in the Union; and lorry manufacturers monitor and report to the Commission CO₂ emission and fuel consumption data as determined pursuant to the certification Regulation for each new vehicle produced for the EU market. This information will be calculated using the Vehicle Energy Consumption Calculation Tool (VECTO).

- The collected data on CO₂ emissions and fuel consumption together with other relevant technical information on the vehicles, including the aerodynamic drag, will be made publicly available by the European Environment Agency on behalf of the Commission, starting in 2021 to cover data monitored between 1 January 2019 and 30 June 2020.

The new system will complement the existing EU reporting system for cars and vans.

Vehicle Energy Consumption Calculation Tool (VECTO)

VECTO is a simulation software that can be used cost-efficiently and reliably to measure the CO₂ emissions and fuel consumption of heavy-duty vehicles for specific loads, fuels and mission profiles (e.g. long haul, regional delivery, urban delivery, etc.), based on input data from relevant vehicle components.

The tool has been developed by the Commission in close cooperation with stakeholders.

Related policy measures

This legislation complements other policy measures such as the Certification Regulation, Monitoring and Reporting Regulation, EU type-approval system, Eurovignette Directive, Fuel Quality Directive, Clean Vehicles Directive, Directive on maximum authorised weights and dimensions and Directive on the deployment of alternative fuels infrastructure.

For Euro 1-6 passenger cars and vans, the chassis dynamometer test cycle used in the EU for emission approval is the NEDC (New European Driving Cycle), see e.g. www.dieselnet.com. The test cycle is also used for fuel consumption measurements. The NEDC cycle consists of two parts, the first part being a 4-time repetition (driving length: 4 km) of the ECE test cycle. The latter test cycle is the so-called urban driving cycle³ (average speed: 19 km per h). The second part of the test is the run-through of the EUDC (Extra Urban Driving Cycle) test driving segment, simulating the fuel consumption under rural and highway driving conditions. The driving length of EUDC is 7 km at an average speed of 63 km per h. More information regarding the fuel measurement procedure can be found in the EU-directive [80/1268/EØF](#).

The NEDC test cycle is not adequately describing real world driving behaviour, and consequently, for diesel cars and vans, there is an increasing mismatch between the stepwise lowered EU emission limits the vehicles comply with during the NEDC test cycle, and the more or less constant emissions from the same vehicles experienced during real world driving. In order to bridge this emission inconsistency gap a new test procedure, the WLTP, has been developed which simulates much more closely real world driving behaviour. The WLTP test procedure gradually take effect from 2017.

For the new Euro 6 vehicles it has been decided that emission measurements must also be made with portable emission measurement systems (PEMS) during real traffic driving conditions with random acceleration and deceleration patterns. During the new Real Driving Emission (RDE) test procedure in a temporary phase, the emissions of NO_x are not allowed to exceed the NEDC

³ For Euro 3 and on, the emission approval test procedure was slightly changed. The 40 s engine warm up phase before start of the urban driving cycle was removed.

based Euro 6 emission limits by more than 110 % by 1 September 2017 for all new car models and by 1 September 2019 for all new cars (Euro 6d-TEMP). From 1 January 2020 in the final phase, the NO_x emission not-to-exceed levels are adjusted downwards to 50 % for all new car models and by 1 January 2021 for all new cars (Euro 6d). Implementation dates for vans are one year later.

In the road transport emission model, compromise dates for enter into service of the Euro 6d-TEMP technology are set to 1 September 2018 and 1 September 2019, for diesel cars and vans, respectively. For Euro 6d, the enter into service dates are set to 1 January 2021 and 1 January 2022 for cars and vans, respectively. (pers. comm. Katja Asmussen, Danish EPA, 2018).

For NO_x, VOC (NMVOC + CH₄), CO and PM, the emissions from road transport vehicles have to comply with the emission limit values agreed by the EU. An overview of the different emission layers in the road transport emission model and the corresponding EU emission directive numbers are given in Table 4.2. The specific emission limits are shown in Annex 2.B.3.

Table 4.2 shows the EU directive dates for new type approvals and the date for first registration (entry into service) of existing, previously type approved vehicle models. The latter date is used in the model for vehicles with no EU norm information given in the car register. In most cases, the entry into service date used in the model is the same as the entry into service date specified by the EU directive.

For passenger cars and light commercial vehicles, the emission directives distinguish between three vehicle classes according to vehicle reference mass⁴: Passenger cars and light duty trucks (<1305 kg) have the same emission limits but different legislation dates. Light duty trucks (1305-1760 kg) and light duty trucks (>1760 kg) have the same legislation dates but different emission limits.

For heavy-duty vehicles (trucks and buses), the emission limits are given in g per kWh and the measurements are carried out for engines in a test bench, using the ECE R-49, EU ESC (European Stationary Cycle) and ETC (European Transient Cycle) test cycles, depending on the Euro norm and exhaust gas after-treatment system installed. For Euro VI engines the WHSC (World Harmonized Stationary Cycle) and WHTC (World Harmonized Transient Cycle) test cycles are used. For a description of the test cycles, see e.g. www.dieselnet.com.

In terms of the sulphur content in the fuels used by road transportation vehicles, the EU directive 2003/17/EF describes the fuel quality standards agreed by the EU. In Denmark, the sulphur content in gasoline and diesel was reduced to 10 ppm in 2005, by means of a fuel tax reduction for fuels with 10 ppm sulphur contents.

⁴ Reference mass: net vehicle weight + mass of fuel and other liquids + 100 kg.

Table 4.2 Overview of emission layers in the road transport emission model and the related EU emission directives.

Vehicle category	Emission layer	EU directive	Type approval	First registration date
Passenger cars (gasoline)	PRE ECE	-	-	<1970-
	ECE 15/00-01	70/220 - 74/290	1972 ^a	1970 ^a
	ECE 15/02	77/102	1981 ^b	1979 ^b
	ECE 15/03	78/665	1982 ^c	1981 ^c
	ECE 15/04	83/351	1987 ^d	1986 ^d
Passenger cars (diesel)	Conventional	-	-	<1991-
Passenger cars	Euro 1	91/441	1.7.1992 ^e	1.1.1991 ^e
	Euro 2	94/12	1.1.1996	1.1.1997
	Euro 3	98/69	1.1.2000	1.1.2001
	Euro 4	98/69	1.1.2005	1.1.2006
	Euro 5	715/2007(692/2008)	1.9.2009	1.1.2011
	Euro 6	715/2007(692/2008)	1.9.2014	1.9.2015
	Euro 6d-TEMP	2016/646	1.9.2017	1.9.2018
	Euro 6d	2016/646	1.1.2020	1.1.2021
LCV < 1305 kg	Conventional	-	-	<1995
	Euro 1	91/441	1.10.1994	1.1.1995
	Euro 2	94/12	1.1.1998	1.1.1999
	Euro 3	98/69	1.1.2001	1.1.2002
	Euro 4	98/69	1.1.2006	1.1.2007
	Euro 5	715/2007(692/2008)	1.9.2010	1.1.2012
	Euro 6	715/2007(692/2008)	1.9.2015	1.9.2016
	Euro 6d-TEMP	2016/646	1.9.2018	1.9.2019
LCV 1305-1760 kg & > 1760 kg	Conventional	-	-	<1995
	Euro 1	93/59	1.10.1994	1.1.1995
	Euro 2	96/69	1.1.1998	1.1.1999
	Euro 3	98/69	1.1.2001	1.1.2002
	Euro 4	98/69	1.1.2006	1.1.2007
	Euro 5	715/2007	1.9.2010	1.1.2012
	Euro 6	715/2007	1.9.2015	1.9.2016
	Euro 6d-TEMP	2016/646	1.9.2018	1.9.2019
Heavy duty vehicles	Euro 6d	2016/646	1.1.2021	1.1.2022
	Euro 0	88/77	1.10.1990	1.10.1990
	Euro I	91/542	1.10.1993	1.10.1993
	Euro II	91/542	1.10.1996	1.10.1996
	Euro III	1999/96	1.10.2000	1.10.2001
	Euro IV	1999/96	1.10.2005	1.10.2006
	Euro V	1999/96	1.10.2008	1.10.2009
	Euro VI	595/2009	1.1.2013	1.1.2014
Mopeds	Conventional	-	-	-
	Euro I	97/24	2000	2000
	Euro II	2002/51	2004	2004
	Euro III	2002/51	2014 ^f	2014 ^f
	Euro IV	168/2013	2017	2017
Motor cycles	Euro V	168/2013	2021	2021
	Conventional	-	0	0
	Euro I	97/24	2000	2000
	Euro II	2002/51	2004	2004
	Euro III	2002/51	2007	2007
	Euro IV	168/2013	2017	2017
	Euro V	168/2013	2021	2021

a,b,c,d: Expert judgement suggests that Danish vehicles enter into the traffic before EU directive first registration dates. The effective inventory starting years are a: 1970; b: 1979; c: 1981; d: 1986; e: The directive came into force in Denmark 1. October 1990.

4.3 Fuel consumption and emission factors

In practice, the emissions from vehicles in traffic are different from the legislation limit values and, therefore, the latter figures are not suited for total emission calculations. Besides difference in test versus real world driving behaviour, as discussed in the previous section, the emission limit values do not reflect the emission impact of cumulated mileage driven, and engine and exhaust after treatment maintenance levels for the vehicle fleet as a whole.

Therefore, in order to represent the Danish fleet and to support average national emission estimates, the selected emission factors must be derived from numerous emission measurements, using a broad range of real world driving patterns and a sufficient number of test vehicles. It is similarly important to have separate fuel consumption and emission data for cold-start emission calculations and gasoline evaporation (hydrocarbons).

The fuel consumption and emission factors used in the Danish inventory come from the COPERT 5 model⁵. The source for these data is various European measurement programmes. In general, the COPERT data are transformed into trip speed dependent fuel consumption and emission factors for all vehicle categories and layers by using trip speeds as shown in Table 4.1. The factors are listed in Annex 4.

It should be noted that for PHEV (plug-in hybrid electric vehicles) cars and vans, the utility factor is set to 0.5, i.e. 50 % of total mileage is assumed to be battery driven, according to assumptions made by DEA (2021)⁶. The fuel consumption and emission factors for plug-in vehicles used in the Danish national emission inventories for road transport, and shown in the present NIR, only contain the part of fuel consumption and emissions related to the combustion of fossil fuel (gasoline) in the vehicles. The emissions related to the generation of the electricity used by battery electric vehicles and plug-in vehicles are included under stationary sources in the Danish emission inventories as prescribed by the UNFCCC reporting guidelines.

4.3.1 Adjustment for fuel efficient vehicles

For passenger cars, COPERT 5 include measurement based fuel consumption factors until Euro 4. A calculation function is provided for newer cars that one hand compensate for the trend towards more fuel efficient vehicles being sold during the later years and on the other hand compensate for the increasing fuel gap between fuel consumption measured during vehicle type approval and real world fuel consumption.

The COPERT calculation function and supporting data material basis is, however, not able to account for the fuel gaps between fuel consumption measured during vehicle type approval and real world fuel consumption for vehicles after 2014, as monitored by e.g. the International Council on Clean Transportation (ICCT), Tietge et al. (2019).

⁵ For vans, the COPERT model do not fully stratify fuel consumption factors into vehicle weight classes. Instead, fuel consumption factor data for vans are obtained from the HBEFA (Handbook of Emission Factors) model version 4.1 (e.g. Matzer et al., 2019).

⁶ The electric driven mileage shares for Danish urban, rural and highway driving conditions are derived by weighing in electric driven mileage shares for urban, rural and highway-driving conditions obtained from HBEFA.

The baseline COPERT 5 fuel consumption factors for Euro 4, Euro 5 and Euro 6 passenger cars are adjusted in the following way.

In the Danish fleet and mileage database kept by DTU Transport, the type approval fuel efficiency value based on the NEDC driving cycle (TA_{NEDC}) is registered for each single car. Further, DTU Transport calculates a modified fuel efficiency value (FC_{inuse}) with the calculation function provided by COPERT 5 that better reflects the fuel consumption in real (“inuse”) traffic conditions.

The latter function uses TA_{NEDC} , vehicle weight, engine size and regression coefficients by first registration year, as input parameters (EMEP/EEA, 2019). For each new registration year, i , fuel type, f , and engine size, k , number based average values of TA_{NEDC} and FC_{inuse} are summed up and referred to as $\overline{TA_{NEDC}}(i, f, k)$ and $\overline{FC_{inuse}}(i, f, k)$. For vehicle new registrations after 2014, regression coefficients are used for 2014.

The FC_{inuse} function has been developed from a vehicle database consisting of new registered cars from 2006-2014 (Tietge et al. 2017). Hence, as previously mentioned, the FC_{inuse} function is not able to account for the fuel gaps after 2014, between type approval and real world fuel consumption as monitored by ICCT (Tietge et al., 2019).

To obtain $\overline{FC_{inuse}}(i, f, k)$ values for vehicle new registrations 2015-2019, the $\overline{FC_{inuse}}(i, f, k)$ values for 2014 are adjusted for the years 2015-2020⁷ with an index function (indexed from 2014), $C_{ICCT}(i, f)$, based on the reported ICCT fuel gap figures by fuel type for the new registration years 2014-2020.

The most recent emission projections use the assumption from The Danish Energy Agency that Danish vehicle sales meet a slightly softer national target of 101.0 CO₂/km in 2021, instead of the EU 95 g CO₂/km, due to increases in new sales of electric cars and plug-in hybrids.

In order to meet the 101.0 g CO₂/km target, the following approach is used to forecast the average TA_{NEDC} values ($TA_{NEDC}(i)$) until 2021. As a starting point, the average CO₂ emission factor (average from all new registrations) is calculated for the last historical year (2020) based on the registered average TA_{NEDC} values from DTU Transport. Next, the average CO₂ emission factor (and $TA_{NEDC}(i)$) for each future year's new sold cars is reduced with a linear function, $C_{2021}(i)$, until the emission factor reaches 101.0 g CO₂/km in 2021. For years beyond 2021 annual fuel efficiency, improvement rates are used for new cars depending on fuel type as suggested by DEA (2021).

The reduction function $C_{2021}(i)$ is then used to reduce the in use type approval fuel efficiency values, $\overline{FC_{inuse}}(i, f, k)$, for the years between last historical year and 2021, for each of the fuel type/engine size fleet segments.

Subsequently these $\overline{FC_{inuse}}(i, f, k)$ values are aggregated by mileage into layer specific values for each inventory year ($\overline{FC_{inuse}}(layer)$).

⁷ The ICCT monitoring report include new cars up to 2017. For new cars from 2018-2020, fuel gap figures are used for cars from 2017.

At the same time, COPERT provides fuel consumption factors for Euro 4 vehicles for a specific driving pattern composition⁸ that better describes real world driving for these specific vehicles. The factors build on the actual fuel measurements for the Euro 4 sample of COPERT vehicles ($FC_{\text{COPERT, sample}}$), used in the development of the Euro 4 emission factors in the COPERT model.

In a final step the ratio between the layer specific fuel factors for the Danish fleet ($\overline{FC_{inuse}(layer)}$) and the COPERT Euro 4 vehicles ($FC_{\text{COPERT, sample}}$) are used to scale the trip speed dependent COPERT 5 fuel consumption factors for Euro 4 layers onwards.

For vans, trucks, urban buses and coaches, annual fuel efficiency improvement rates are used for future new vehicles depending on fuel type as suggested by DEA (2021).

4.3.2 Adjustment for EGR, SCR and filter retrofits

In COPERT 5, emission factors are available for Euro V heavy duty vehicles using exhaust gas recirculation (EGR) and selective catalyst reduction (SCR) exhaust emission aftertreatment systems, respectively. The estimated new sales of Euro V diesel trucks equipped with EGR and SCR during the 2006-2010 time periods has been examined by Hjelgaard and Winther (2011). These inventory fleet data are used in the Danish inventory to calculate weighted emission factors for Euro V trucks in different size categories.

During the 2000's urban environmental zones have been established in Danish cities in order to bring down the particulate emissions from diesel fuelled heavy duty vehicles. Driving in these environmental zones prescribe the use of diesel particulate filters. The Danish EPA has provided the estimated number of Euro I-III urban buses and Euro II-III trucks and tourist buses, which have been retrofitted with filters during the 2000s. These retrofit data are included in the Danish inventory by assuming that particulate emissions are lowered by 80 % compared with the emissions from the same Euro technology with no filter installed (Winther, 2011).

For all vehicle categories/technology levels not represented by measurements, the emission factors are produced by using reduction factors. The latter factors are determined by assessing the EU emission limits and the relevant emission approval test conditions, for each vehicle type and Euro class.

4.3.3 Adjustment of emission factors for Euro 5 diesel passenger cars influenced by the diesel scandal

In COPERT 5, new emission factors are available for those Euro 5 diesel passenger cars for which engine control software has been installed in order to reduce the emissions, as a result of the diesel scandal.

The Euro 5 vehicles in question were brought to vehicle workshops during the vehicle recall program from 2016-2018. A short description of the recall program and the cars included is given below.

⁸ The factors are derived from the Common Artemis Driving Cycle (CADC), with a 1/3 weight for each of the urban, rural and highway parts of CADC.

- Engine software was updated in 70,946 cars, evenly shared by 1/3 in each of the years 2016-2018;
- Vehicle first registration years of the updated cars were between 2009-2016;
- Engine sizes of the updated cars were < 1.4 l (9 %) and 1.4-2 l (91 %).

In the emission model, each year's updates were distributed into first registration year-engine size categories, according to their fleet shares in the respective first registration year-engine size categories.

The number of included cars in the software update program was provided by the Danish Safety Technology Authority (Bonde, 2021) and engine size and model year information was provided by Volkswagen (Hjortshøj, 2021).

4.3.4 Adjustment for biofuel usage

A literature review carried out in the Danish research project REBECA revealed no significant changes in emission factors between neat gasoline and E5 gasoline-ethanol blends for the combustion related emission components; NO_x, CO and VOC (Winther et al., 2012). Hence, due to the current low ethanol content in today's road transport gasoline, no modifications of the neat gasoline based COPERT emission factors are made in the inventories in order to account for ethanol usage.

REBECA results published by Winther (2009) have shown that the emission impact of using diesel-biodiesel blends is very small at low biodiesel blend ratios. Consequently, no bio fuel emission factor adjustments are needed for diesel vehicles as well. However, adjustment of the emission factors for diesel vehicles will be made if the biodiesel content of road transport diesel fuel increases to a more significant level in the future.

4.4 Deterioration factors

For three-way catalyst cars, the emissions of NO_x, NMVOC and CO gradually increase due to catalyst wear and are, therefore, modified as a function of total mileage by the so-called deterioration factors. Even though the emission curves may be serrated for the individual vehicles, on average, the emissions from catalyst cars stabilise after a given cut-off mileage is reached due to OBD (On Board Diagnostics) and the Danish inspection and maintenance programme.

For each year, the deterioration factors are calculated per first registration year by using deterioration coefficients and cut-off mileages, as given in EMEP/EEA (2019), for the corresponding layer. The deterioration coefficients are given for the two driving cycles: "Urban Driving Cycle" (UDF) and "Extra Urban Driving Cycle" (EUDF: urban and rural), with trip speeds of 19 and 63 km per hour, respectively.

Firstly, the deterioration factors are calculated for the corresponding trip speeds of 19 and 63 km per hour in each case determined by the total cumulated mileage less than or exceeding the cut-off mileage. The Formulas 3 and 4 show the calculations for the "Urban Driving Cycle":

$$UDF = U_A \cdot MTC + U_B, \text{ MTC} < U_{MAX} \quad (3)$$

$$UDF = U_A \cdot U_{MAX} + U_B, \text{MTC} \geq U_{MAX} \quad (4)$$

where UDF is the urban deterioration factor, U_A and U_B the urban deterioration coefficients, MTC = total cumulated mileage and U_{MAX} urban cut-off mileage.

In the case of trip speeds below 19 km per hour the deterioration factor, DF, equals UDF, whereas for trip speeds exceeding 63 km per hour, DF=EUDF (Danish rural and highway trip speed; c.f. Table 4.1). For trip speeds between 19 and 63 km per hour (Danish urban trip speed; c.f. Table 4.1) the deterioration factor, DF, is found as an interpolation between UDF and EUDF. Secondly, the deterioration factors, one for each of the three road types, are aggregated into layers by taking into account vehicle numbers and annual mileage levels per first registration year:

$$DF_{j,y} = \frac{\sum_{i=FYear(j)}^{LYear(j)} DF_{i,y} \cdot N_{i,y} \cdot M_{i,y}}{\sum_{i=FYear(j)}^{LYear(j)} DF_{i,y} \cdot N_{i,y}} \quad (5)$$

where DF is the deterioration factor.

For N_2O and NH_3 , COPERT 5 takes into account deterioration as a linear function of mileage for gasoline fuelled EURO 1-6 passenger cars and light duty vehicles. The level of emission deterioration also relies on the content of sulphur in the fuel. The deterioration coefficients are given in EMEP/EEA (2019), for the corresponding layer. A cut-off mileage of 250,000 km is behind the calculation of the modified emission factors, and for the Danish situation, the low sulphur level interval is assumed to be most representative. The deterioration factors are shown in Annex 6 for 2020.

4.5 Calculation method

4.5.1 Emissions and fuel consumption for hot engines

Emissions and fuel-use results for operationally hot engines are calculated for each year and for layer and road type. The procedure is to combine fuel consumption and emission factors (and deterioration factors for catalyst vehicles), number of vehicles, annual mileage levels and the relevant road-type shares. For non-catalyst vehicles this yields:

$$E_{j,k,y} = EF_{j,k,y} \cdot S_k \cdot N_{j,y} \cdot M_{j,y} \quad (6)$$

Here E = fuel consumption/emission, EF = fuel consumption/emission factor, S = road type share and k = road type.

For catalyst vehicles the calculation becomes:

$$E_{j,k,y} = DF_{j,k,y} \cdot EF_{j,k,y} \cdot S_k \cdot N_{j,y} \cdot M_{j,y} \quad (7)$$

4.5.2 Extra emissions and fuel consumption for cold engines

Extra emissions of NO_x, VOC, CH₄, CO, PM, N₂O, NH₃ and fuel consumption from cold start are simulated separately. For SO₂ and CO₂, the extra emissions are derived from the cold start fuel consumption results.

Each trip is associated with a certain cold start emission level and is assumed to take place under urban driving conditions. The number of trips is distributed evenly across the months. First, cold emission factors are calculated as the hot emission factor times the cold:hot emission ratio. Secondly, the extra emission factor during cold start is found by subtracting the hot emission factor from the cold emission factor. Finally, this extra factor is applied on the fraction of the total mileage driven with a cold engine (the β -factor) for all vehicles in the specific layer.

The cold:hot ratios depend on the average trip length and the monthly ambient temperature distribution. The Danish temperatures for 2020 are given in Rubek et al. (2021). For previous years, temperature data are taken from similar reports available from The Danish Meteorological Institute (www.dmi.dk). The cold:hot ratios are equivalent for gasoline fuelled conventional passenger cars and vans, and for diesel passenger cars and vans, respectively, see EMEP/EEA (2019). For conventional gasoline and all diesel vehicles the extra emissions become:

$$CE_{j,y} = \beta \cdot N_{j,y} \cdot M_{j,y} \cdot EF_{U,j,y} \cdot (CEr - 1) \quad (8)$$

Where CE is the cold extra emissions, β = cold driven fraction, CEr = Cold:Hot ratio.

For catalyst cars, the cold:hot ratio is also trip speed dependent. The ratio is, however, unaffected by catalyst wear. The Euro I cold:hot ratio is used for all future catalyst technologies. However, in order to comply with gradually stricter emission standards, the catalyst light-off temperature must be reached in even shorter periods of time for future EURO standards. Correspondingly, the β -factor for gasoline vehicles is reduced step wise for Euro II vehicles and their successors.

For catalyst vehicles the cold extra emissions are found from:

$$CE_{j,y} = \beta_{red} \cdot \beta_{EUROI} \cdot N_{j,y} \cdot M_{j,y} \cdot EF_{U,j,y} \cdot (CEr_{EUROI} - 1) \quad (9)$$

where β_{red} = the β reduction factor.

For CH₄, specific emission factors for cold driven vehicles are included in COPERT 5. The β and β_{red} factors for VOC are used to calculate the cold driven fraction for each relevant vehicle layer. The NMVOC emissions during cold start are found as the difference between the calculated results for VOC and CH₄.

For N₂O and NH₃, specific cold start emission factors are also proposed by COPERT 5. For catalyst vehicles, however, just like in the case of hot emission factors, the emission factors for cold start are functions of cumulated mileage (emission deterioration). The level of emission deterioration also relies on the content of sulphur in the fuel. The deterioration coefficients are given in EMEP/EEA (2019), for the corresponding layer. For cold start, the cut-off

mileage and sulphur level interval for hot engines are used, as described in the deterioration factors paragraph.

4.5.3 Evaporative emissions from gasoline vehicles

For each year, evaporative emissions of hydrocarbons are simulated in the forecast model as hot and warm running losses, hot and warm soak loss and diurnal emissions. The calculations follow the Tier 2 approach in COPERT 5. The basic emission factors are season related (predefined by four ambient temperature intervals), for Danish climate conditions the temperature intervals [-5, 10], [0, 15] and [10, 25] °C are used. The emission factors are shown in more details in EMEP/EEA (2019).

Running loss emissions originate from vapour generated in the fuel tank while the vehicle is running. The distinction between hot and warm running loss emissions depends on engine temperature, i.e. the engine being either hot or cold. The emissions are calculated as annual mileage (broken down into cold and hot mileage totals using the β -factor) times the respective emission factors. For vehicles equipped with evaporation control (catalyst cars) only hot running loss emissions occur.

$$E_{j,y}^R = N_{j,y} \cdot \frac{M_{j,y}}{l_{trip}} \cdot ((1 - \beta) \cdot HR + \beta \cdot WR) \quad (10)$$

Where E^R is running loss emissions, l_{trip} = the average trip length, and HR and WR are the hot and warm running loss emission factors, respectively.

Hot and warm soak emissions also occur for carburettor vehicles (no evaporation control), whereas for catalyst cars (evaporation control) only hot soak emissions occur. The soak emissions are calculated as number of trips (broken down into cold and hot trip numbers using the β -factor) times respective emission factors:

$$E_{j,y}^S = N_{j,y} \cdot \frac{M_{j,y}}{l_{trip}} \cdot ((1 - \beta) \cdot HS + \beta \cdot WS) \quad (11)$$

Where E^S is the soak emission, l_{trip} = the average trip length, and HS and WS are the hot and warm soak emission factors, respectively.

Average maximum and minimum temperatures per month are used in combination with diurnal emission factors to estimate the diurnal emissions from both carburettor and catalyst vehicles E^D :

$$E_{j,y}^D = 365 \cdot N_{j,y} \cdot e^D \quad (12)$$

Each year's total is the sum of each layer's running loss, soak loss and diurnal emissions.

4.5.4 Fuel consumption balance

The calculated fuel consumption in COPERT 5 must equal the statistical fuel sale totals according to the UNFCCC and UNECE emissions reporting format. The statistical fuel sales for road transport are derived from the Danish Energy Authority data (see DEA, 2021).

For gasoline, the DEA sales data for road transport are adjusted at first, in order to account for e.g. non-road and recreational craft fuel consumption, which are not directly stated in the statistics. Please refer to paragraph 5.5 for further information regarding the transformation of DEA fuel data. Next, the fuel and emission results for all gasoline vehicles are scaled with the percentage difference between the bottom-up gasoline fuel consumption on Danish roads and total gasoline fuel sold.

The DEA data for diesel consist of fuel sold in Denmark and used on Danish roads and fuel sold in Denmark and used abroad. The latter diesel fuel contribution is estimated by the Danish Ministry of Taxation based on studies on fuel price differences across borders, fuel discount for haulage contractors and fuel tanking behaviour of truck and bus operators as well as private cars (see e.g. the Danish Ministry of Taxation, 2015).

The diesel border sales (diesel used abroad) is allocated to truck-trailer and articulated trucks (TT/AT trucks) in two total vehicle weight categories, < 40 tonnes and > 40 tonnes, and coaches.

The distribution of the diesel used abroad is split into the three vehicle categories by using the relative fuel consumption used in Denmark by foreign TT/AT trucks (< 40 tonnes and > 40 tonnes) and coaches (calculated based on mileage driven in Denmark by foreign trucks (paragraph 4.1) and corresponding fuel consumption factors).

The calculated “border” scaling factors of the TT/AT trucks and coaches in the model, i.e. the ratio between the total model fuel consumption (model fuel consumption in Denmark and model fuel consumption abroad) and the model fuel consumption in Denmark for these vehicle categories are shown in Figure 4.3.

The total model fuel consumption for all vehicle categories is subsequently calculated in a first step, as the product of fuel consumption factors and corresponding total mileage, the latter being adjusted for mileage driven outside Denmark, as described above in the case of TT/AT trucks and coaches (adjusted bottom up diesel fuel consumption).

Next, the percentage difference between the first step model diesel fuel consumption (adjusted bottom up diesel fuel consumption) and the total diesel fuel sold in Denmark is used to scale fuel and emission results for all diesel vehicles regardless of vehicle category (Figure 4.4). The data behind the Figures 4.3 and 4.4 are also listed in Annex 8.

Model scaling factors - TT/AT trucks and coaches (Adjustment for mileage abroad)

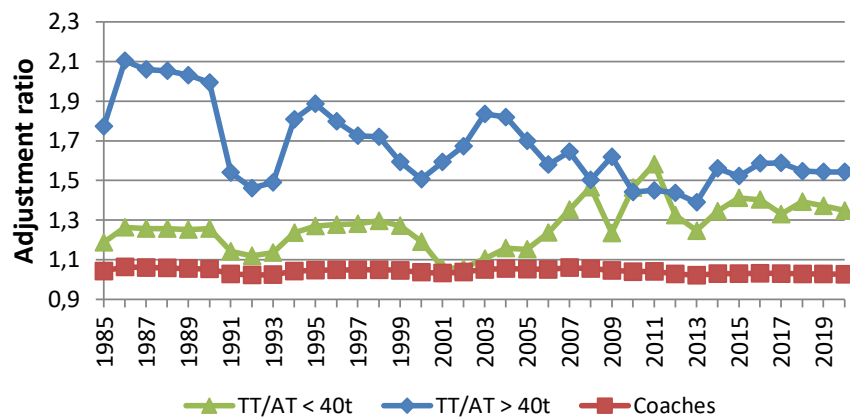


Figure 4.3 Fuel and emission adjustment ratios for TT/AT trucks and coaches: Bottom-up fuel consumption plus diesel used abroad vs bottom-up fuel consumption.

Model scaling factors - all vehicles Fuel sold and used in Denmark

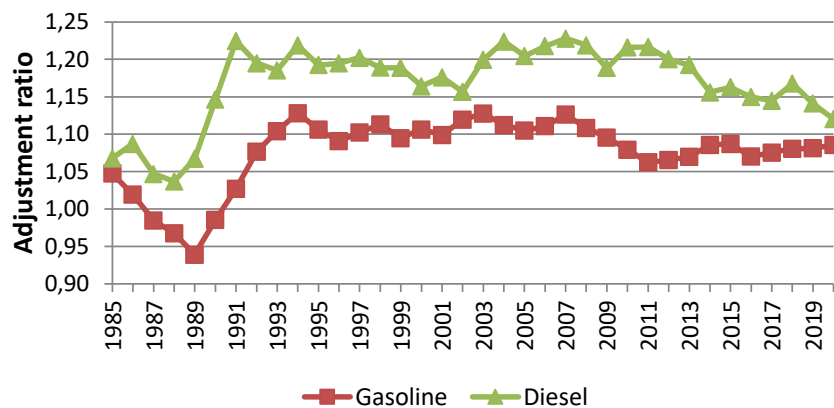


Figure 4.4 Gasoline and diesel fuel ratios (fuel and emission adjustment factors) regardless of vehicle category: Fuel sold and used in Denmark vs bottom-up fuel consumption used in Denmark.

The reasons for the differences between DEA sales figures and bottom-up fuel estimates shown in Figure 4.4 are mostly due to a combination of the uncertainties related to COPERT 5 fuel consumption factors, allocation of vehicle numbers in sub-categories, annual mileage, trip speeds and mileage splits for urban, rural and highway driving conditions.

The final fuel consumption and emission factors are shown in Annex 7 for 1985-2020. The total fuel consumption and emissions are shown in Annex 8, per vehicle category and as grand totals, for 1985-2020 (and NFR format in Annex 16). In Annex 15, fuel consumption and emission factors as well as total emissions are given in CollectER format for 2020.

In the following, Figures 4.5 – 4.13, km related fuel consumption factors, and the fuel and km related emission factors for CO₂ (km related only), NO_x, NMVOC, CO, TSP, BC, CH₄ and N₂O are shown per vehicle type for the Danish road transport.

For CO₂, the neat gasoline/diesel emission factors shown in Table 4.3 are country-specific values, and come from the DEA. In 2006 and 2008, respectively, bioethanol and biodiesel became available from a limited number of

gas filling stations in Denmark, and today bio ethanol and biodiesel (FAME) is added to all fuel commercially available. Following the IPCC guideline definitions, bio fuels are in principle regarded as CO₂ neutral for the transport sector as such. A small part of carbon (and the associated CO₂ emissions) in biodiesel, however, have a fossil origin due to the use of fossil-derived methanol in the biodiesel production process. This is accounted for in the emission inventories by following the biodiesel fossil carbon content calculation methodology provided by Sempas (2019).

At present, the Danish road transport fuels only have low biofuel (BF) shares (Table 4.3), and hence, no thermal efficiency changes are expected for the fuels. Consequently, the energy based fuel consumption factors (MJ/km) derived from COPERT IV are used also in this case.

As a function of the current ethanol/biodiesel energy percentage, BF%_E, (Table 4.3) the average fuel related CO₂ emission factors, $emf_{CO_2,E}(BF\%)$ become:

$$EF_{CO_2,E}(BF\%) = EF_{CO_2,E}(BF0) \cdot (100 - BF\%_E) \quad (13)$$

Where:

$EF_{CO_2,E}(BF\%)$ = average fuel related CO₂ emission factor (g MJ⁻¹) for current BF%

$EF_{CO_2,E}(BF0)$ = fuel related CO₂ emission factor (g MJ⁻¹) for fossil fuels

The kilometer based average CO₂ emission factor is subsequently calculated as the product of the fuel related CO₂ emission factor from equation 3 and the energy based fuel consumption factor, $FC_{CO_2,E}(BF0)$, derived from COPERT 5:

$$EF_{CO_2,km}(BF\%) = EF_{CO_2,E}(BF\%) \cdot FC_E(BF0) \quad (14)$$

A literature review carried out in the Danish research project REBECA revealed no significant changes in emission factors between neat gasoline and E5 gasoline-ethanol blends for the combustion related emission components; NO_x, CO and VOC (Winther et al., 2012). Hence, due to the current low ethanol content in today's road transport gasoline, no modifications of the neat gasoline based COPERT emission factors are made in the inventories in order to account for ethanol usage.

REBECA results published by Winther (2009) have shown that the emission impact of using diesel-biodiesel blends is very small at low biodiesel blend ratios. Consequently, no bio fuel emission factor adjustments are needed for diesel vehicles as well. However, adjustment of the emission factors for diesel vehicles will be made if the biodiesel content of road transport diesel fuel increases to a more significant level in the future.

The fuel related CO₂ emission factors for neat gasoline/diesel, bio ethanol/biodiesel, and aggregated CO₂ factors are shown in Table 4.3. For gasoline and compressed natural gas (CNG) the CO₂ emission factors are country-specific. For gasoline, the emission factor source is Fenhann and Kilde (1994). For CNG, the CO₂ emission factor is estimated by the Danish gas transmission company, Energinet.dk, based on gas analysis data. For liquefied petroleum gas (LPG), the emission factor source is EMEP/EEA (2019). For diesel, the emission factor source is IPCC (2006).

Table 4.3 Fuel-specific CO₂ emission factors and biofuel shares for road transport in Denmark.

Table 10: Fuel-specific CO ₂ emission factors and biofuel share for road transport in Denmark																
	Emission factors (g/MJ)															
Fuel type	1990-2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Neat diesel	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1	74.1
Neat gasoline	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73
LPG	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
Biodiesel	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
Bio ethanol	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Diesel avg.	74.1	74.1	74.1	74.1	74.0	74.1	71.8	69.7	69.5	69.5	69.6	69.6	69.8	69.9	69.5	69.5
Gasoline avg.	73	72.9	72.8	72.8	72.8	71.8	70.7	70.5	70.6	70.6	70.7	70.7	70.7	70.7	70.7	68.4
	Biofuel share (BF%) of Danish road transport fuels															
	1990-2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
	0	0.07	0.11	0.10	0.16	0.54	2.63	4.28	4.38	4.46	4.39	4.38	4.30	4.22	4.56	5.40

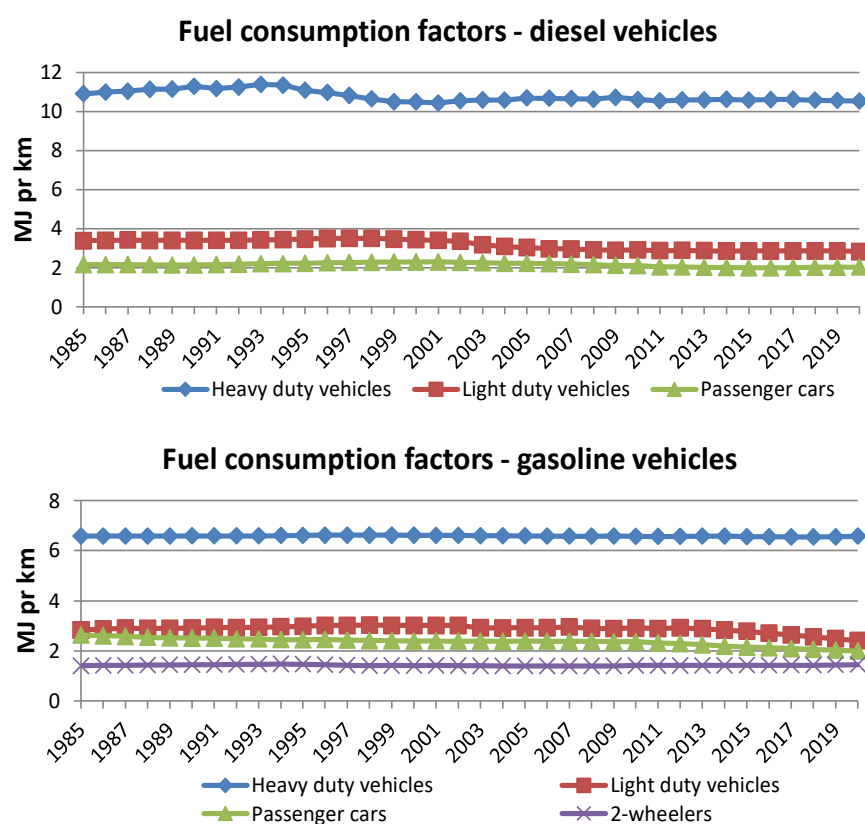


Figure 4.5 Km related fuel consumption factors per fuel type and vehicle type for Danish road transport (1985-2020).

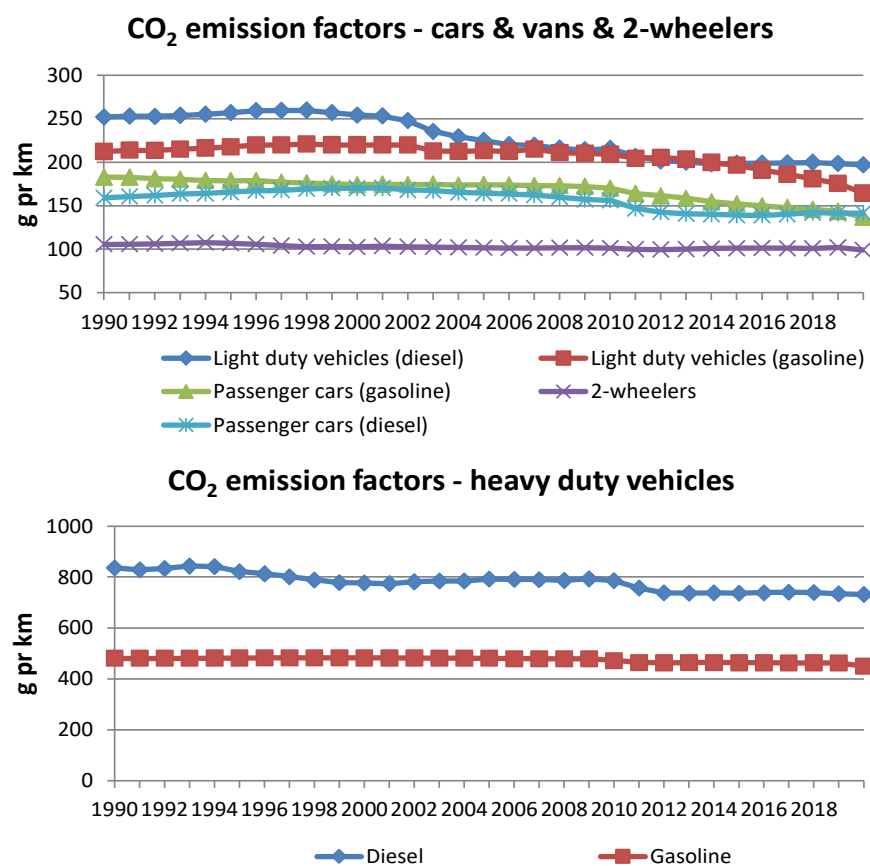


Figure 4.6 Km related CO₂ emission factors per vehicle type for Danish road transport (1990-2020).

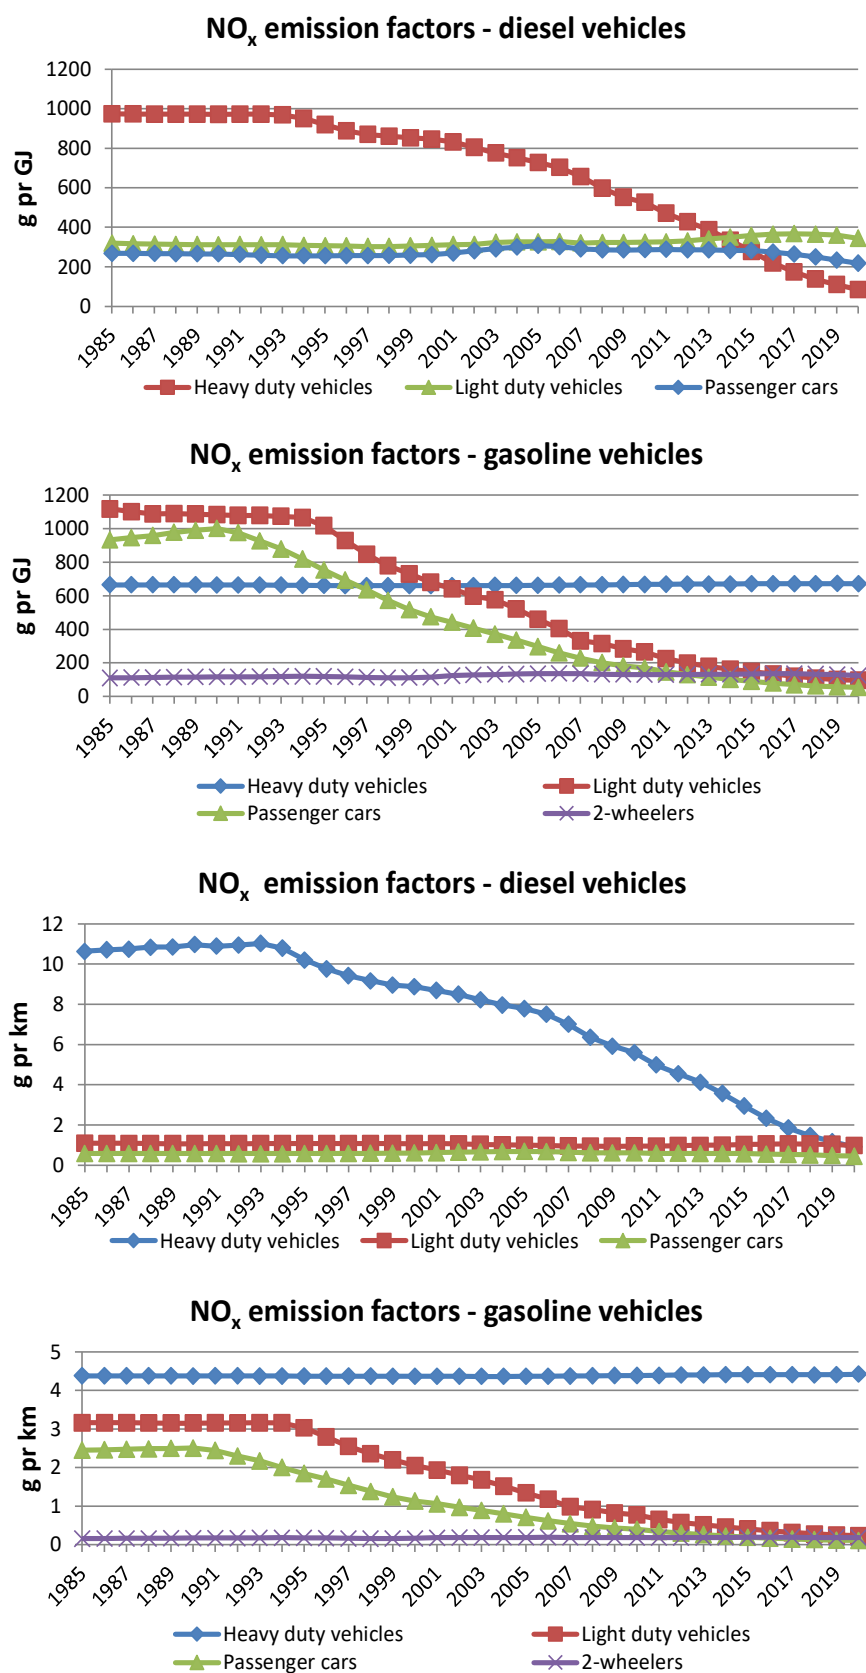


Figure 4.7 Fuel and km related NO_x emission factors per vehicle type for Danish road transport (1985-2020).

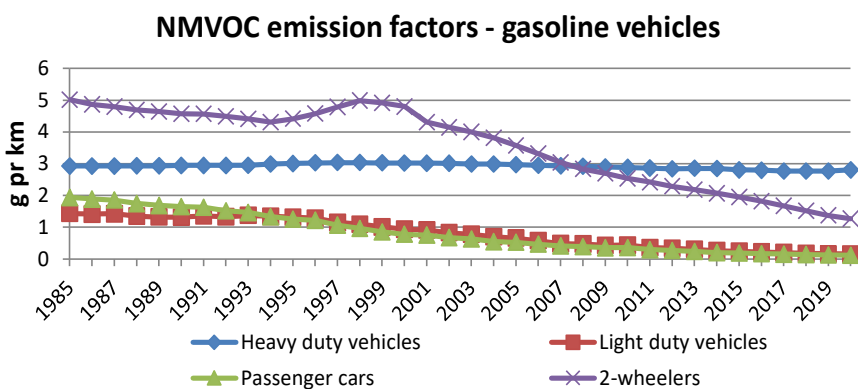
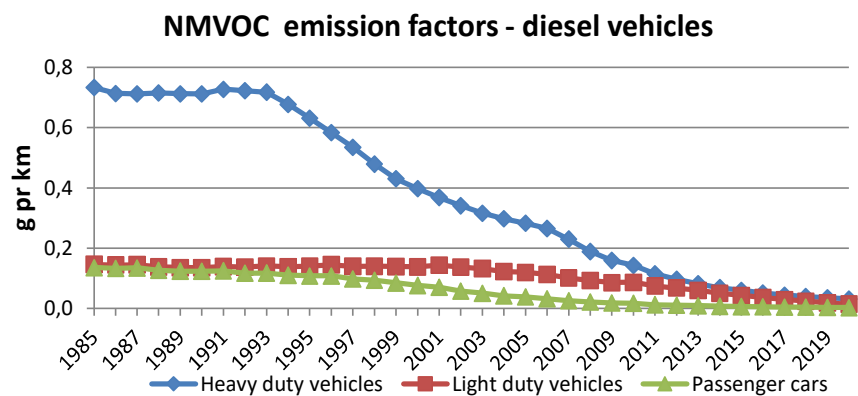
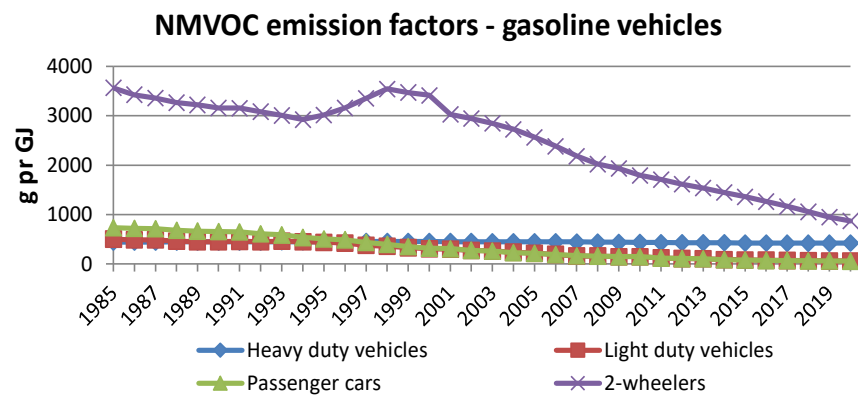
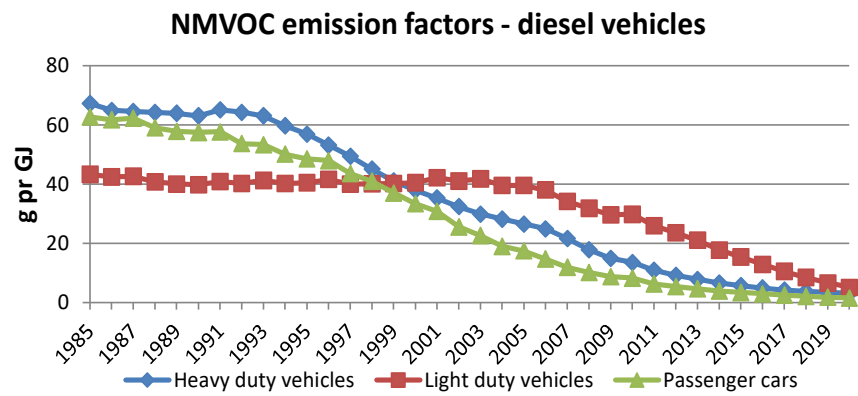


Figure 4.8 Fuel and km related NMVOC emission factors per vehicle type for Danish road transport (1985-2020).

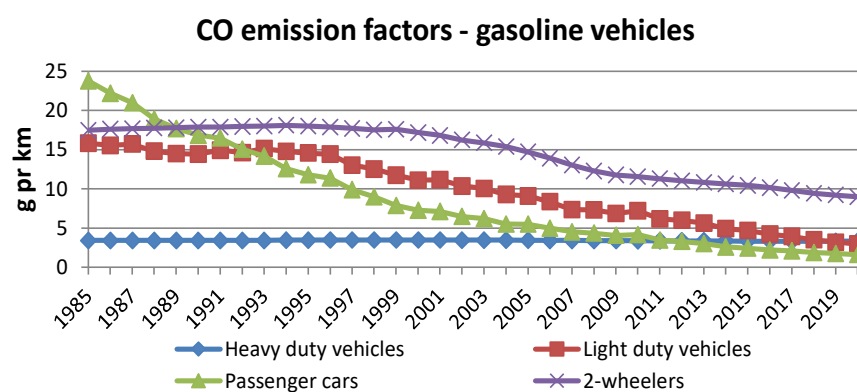
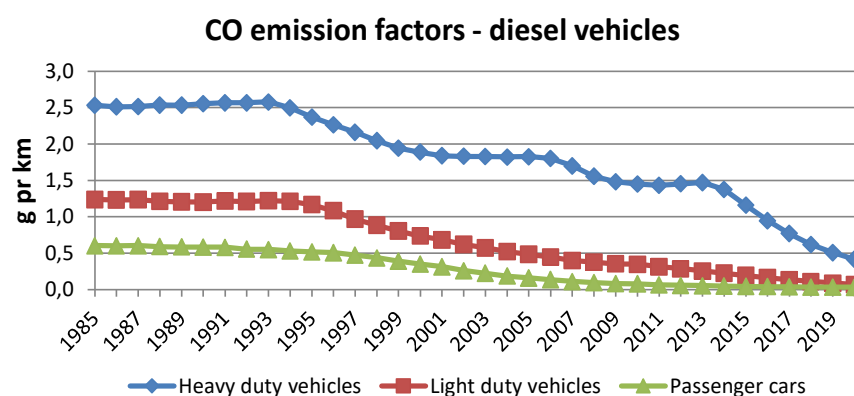
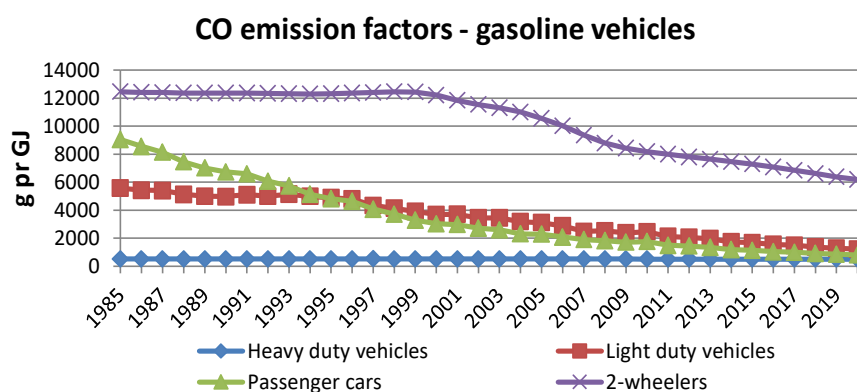
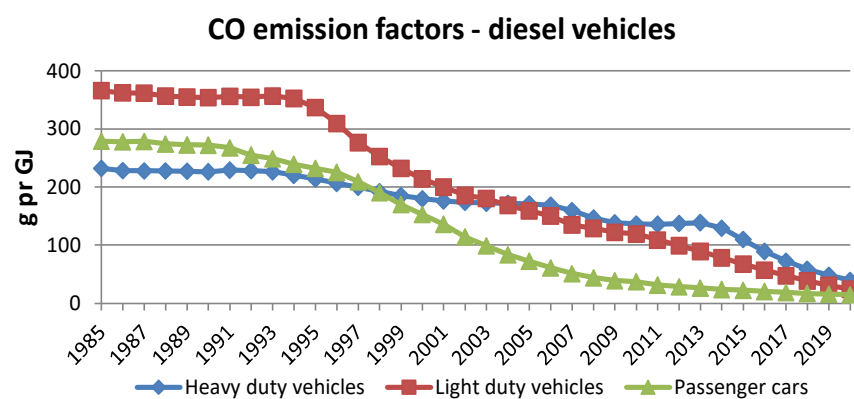


Figure 4.9 Fuel and km related CO emission factors per vehicle type for Danish road transport (1985-2020).

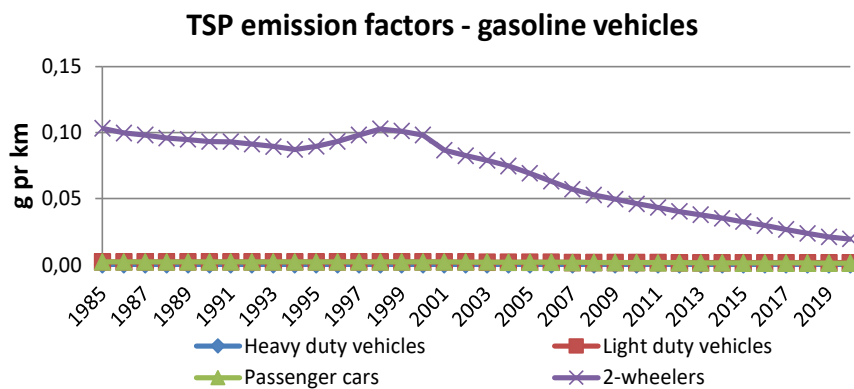
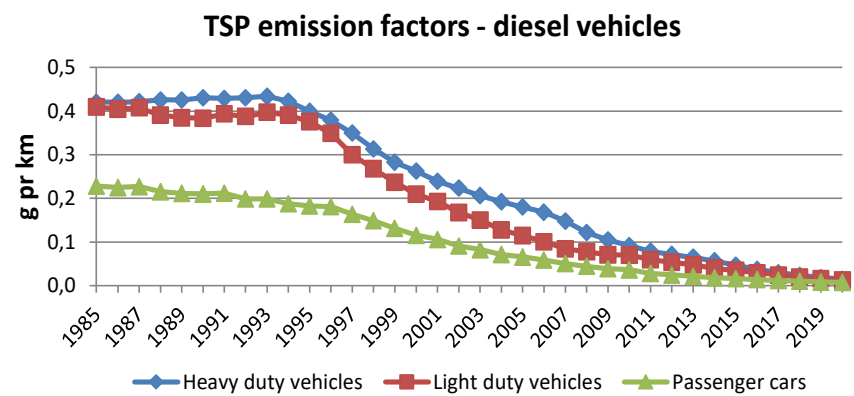
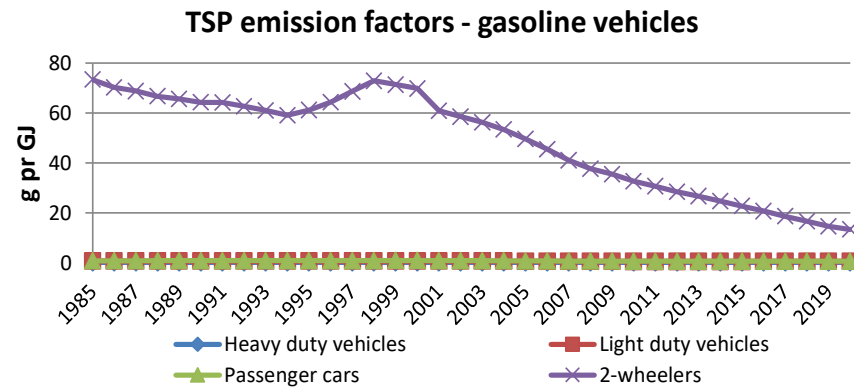
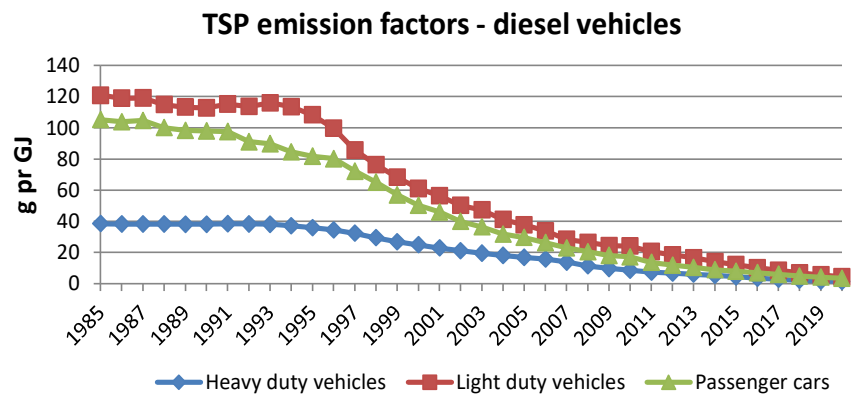


Figure 4.10 Fuel and km related TSP emission factors per vehicle type for Danish road transport (1985-2020).

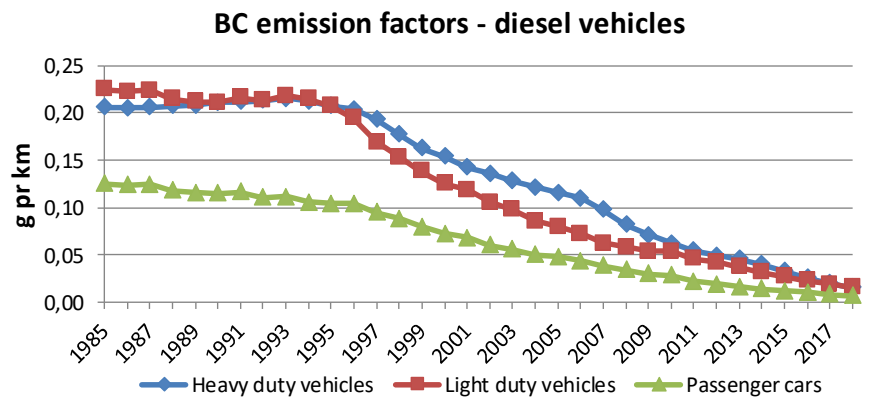
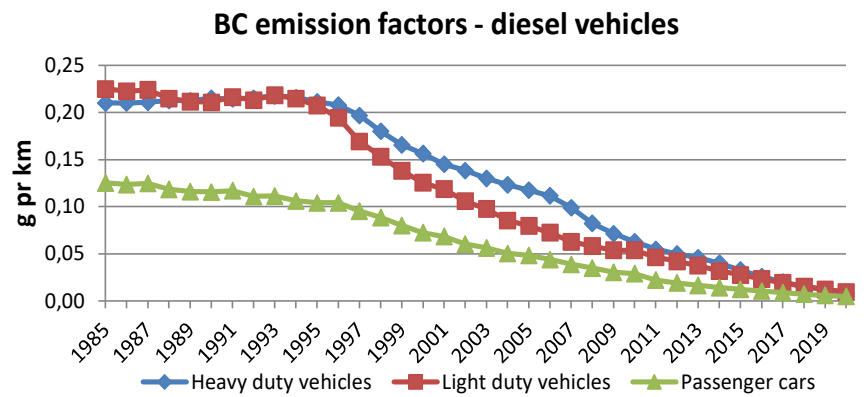
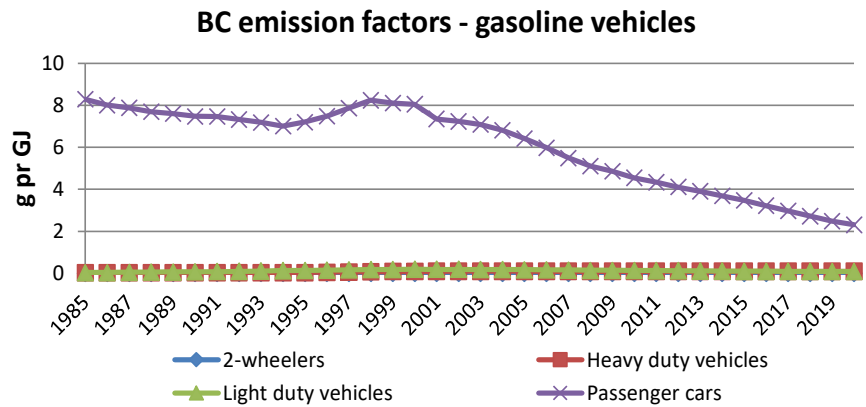
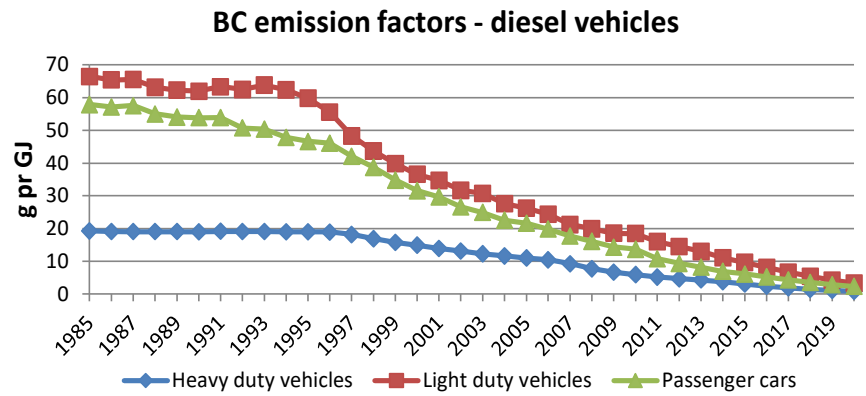


Figure 4.11 Fuel and km related BC emission factors per vehicle type for Danish road transport (1985-2020).

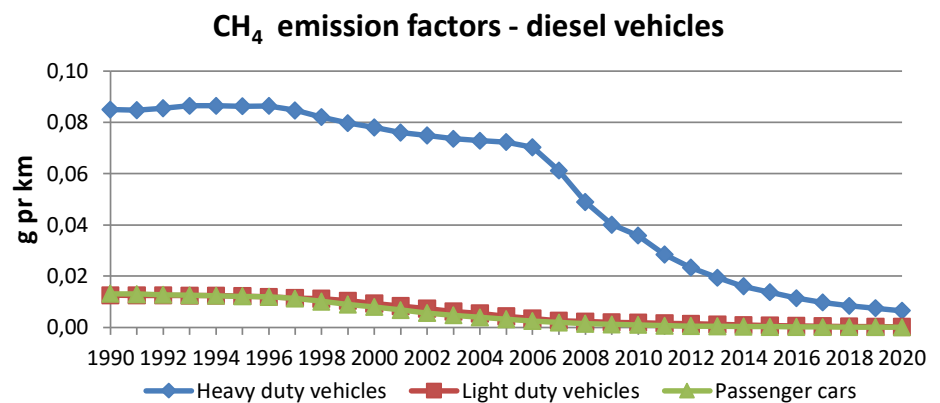
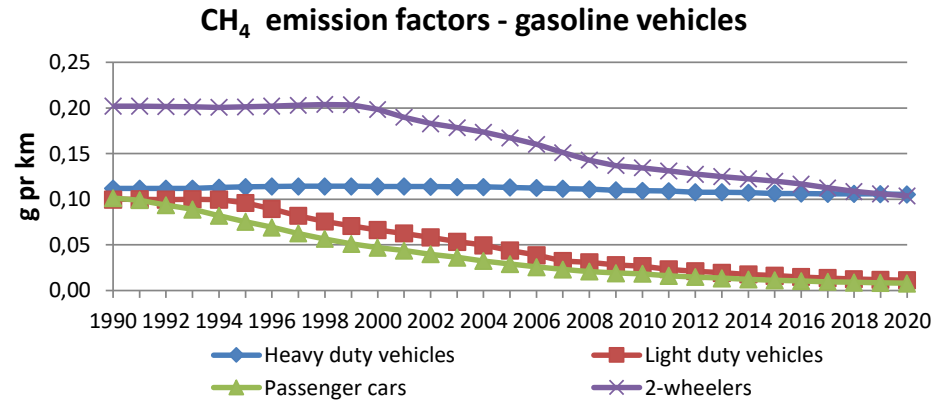
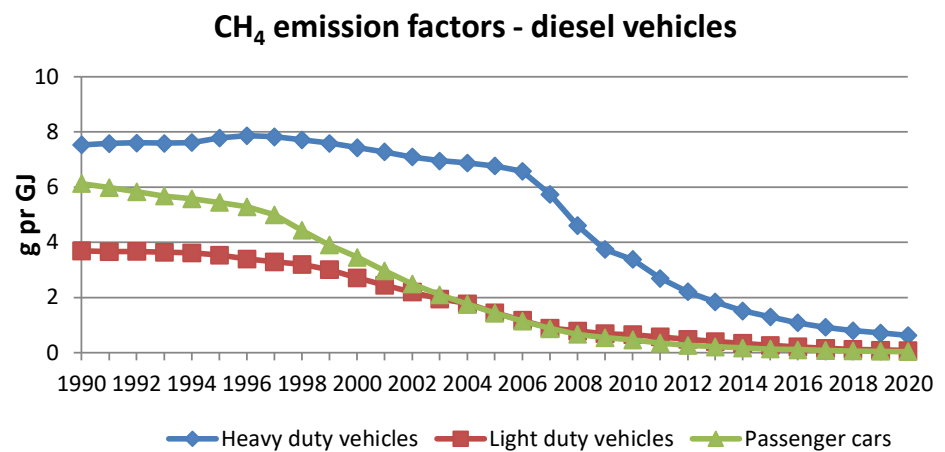
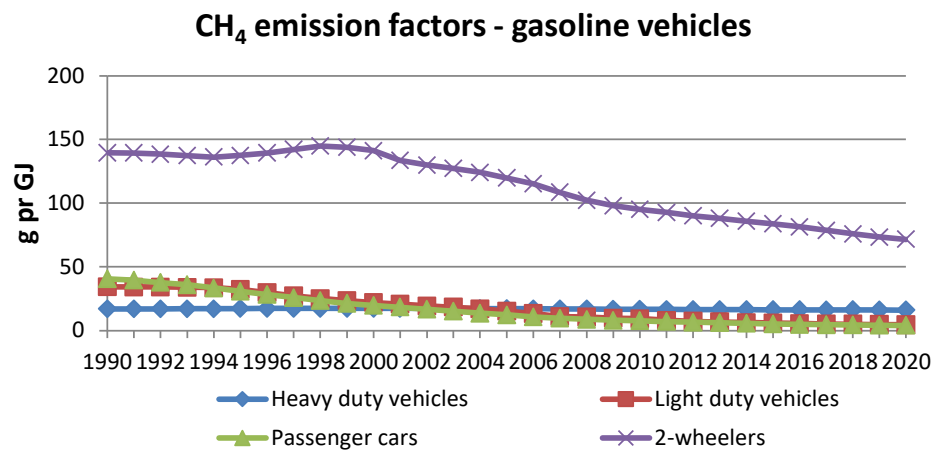


Figure 4.12 Fuel and km related CH₄ emission factors per vehicle type for Danish road transport (1990-2020).

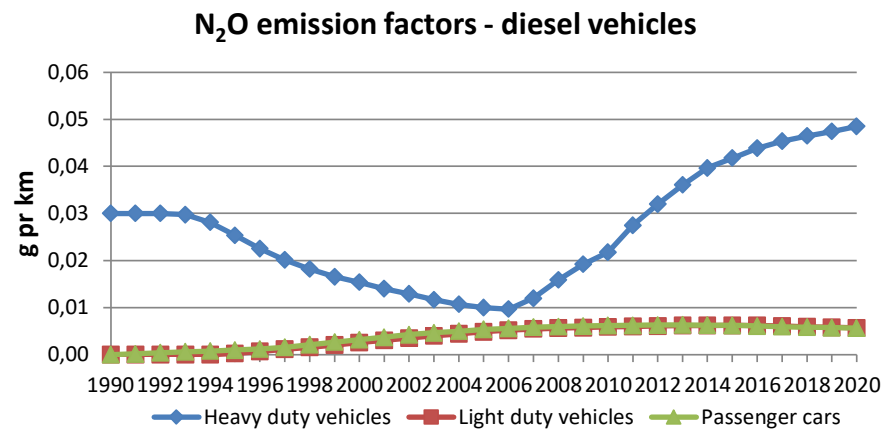
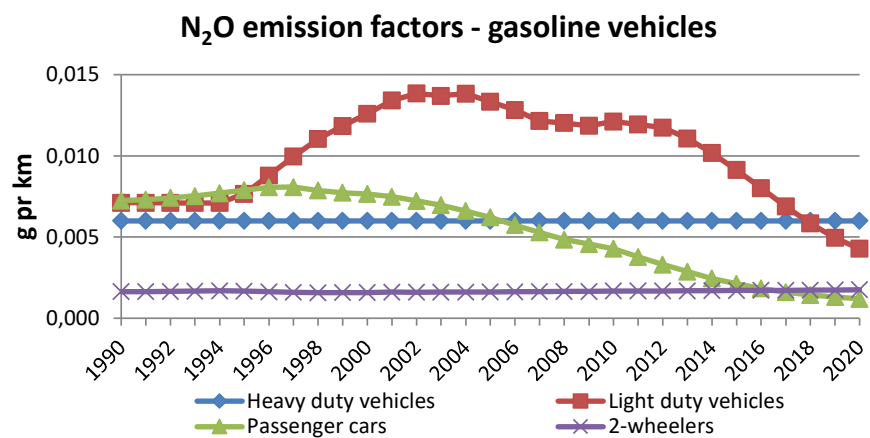
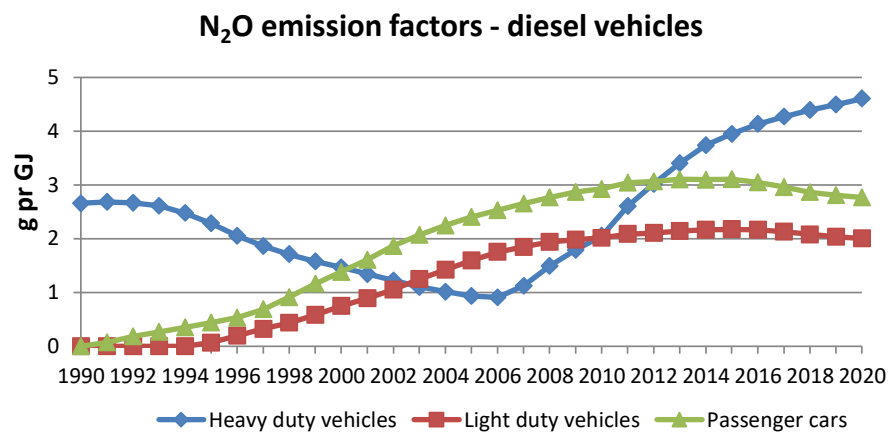
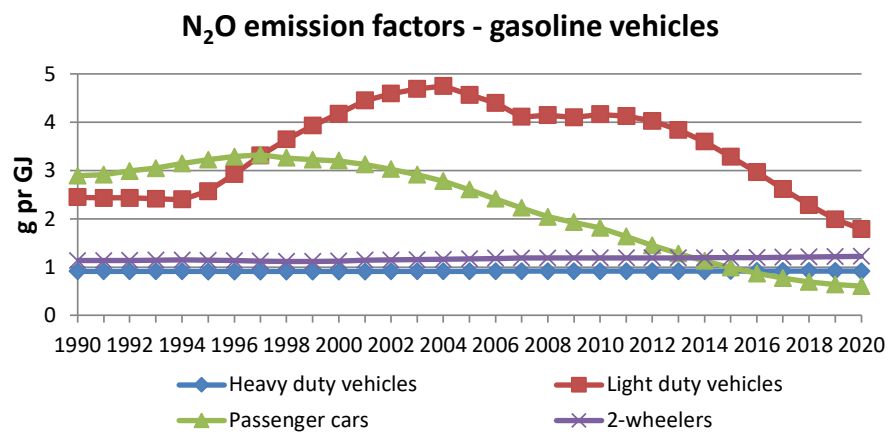


Figure 4.13 Fuel and km related N₂O emission factors per vehicle type for Danish road transport (1990-2020).

5 Input data and calculation methods for other mobile sources

Other mobile sources are divided into several sub-sectors: sea transport, fishery, air traffic, railways, military, and working machinery and equipment in the sectors Agriculture, Forestry, Industry and Residential. The emission calculations are made in internal DCE models using the detailed method as described in the EMEP/EEA air pollutant emission inventory guidebook (EMEP/EEA, 2019) for air traffic, off-road working machinery and equipment, ferries and fisheries, while for the remaining sectors the simple method is used.

5.1 Activity data

5.1.1 Air traffic

The activity data used in the DCE emission model for aviation consists of air traffic statistics provided by the Danish Transport, Construction and Housing Authority and Copenhagen Airport. Fuel statistics for jet fuel consumption and aviation gasoline is obtained from the Danish energy statistics (DEA, 2021a).

For 2001 onwards, the Danish Transport and Construction Agency provides data records per flight (city-pairs). Each flight record consists of e.g. ICAO codes for aircraft type, origin and destination airport, maximum takeoff mass (MTOM), flight call sign and aircraft registration number.

In the DCE model, each aircraft type is paired with a representative aircraft type, for which fuel consumption and emission data exist in the EMEP/EEA databank. As a basis, the type relation table is taken from the Eurocontrol AEM model, which is the primary source for the present EMEP/EEA fuel consumption and emission data. Supplementary aircraft types are assigned to representative aircraft types based on the type relation table already established in the previous version of the DCE model (e.g. Winther, 2020).

Additional aircraft types not present in the type relation table are identified by using different aircraft dictionaries and internet look-ups. In order to select the most appropriate aircraft representative type, the main selection criterias are the identified aircraft type, aircraft maximum takeoff mass, engine types, and number of engines. During this sequence, small aircraft with piston engines using aviation gasoline are excluded from the calculations.

Annex 10 shows the correspondence table between the actual aircraft type codes and representative aircraft types behind the Danish inventory. Annex 10 also show the number of LTO's per representative aircraft type for domestic and international flights starting from Copenhagen Airport and other airports, respectively⁹, in a time series from 2001-2020. The airport split is necessary to make due to the differences in LTO emission factors (cf. section 5.4.1).

⁹ Excluding flights for Greenland and the Faroe Islands. These flights are separately listed in Annex 10.

The same type of LTO activity data for the flights for Greenland and the Faroe Islands are shown in Annex 10 also, further detailed into an origin-destination airport matrix and having flight distances attached. This level of detail satisfies the demand from UNFCCC to provide precise documentation for the part of the inventory for the Kingdom of Denmark being outside the Danish mainland.

The ideal flying distance (great circle distance) between the city-pairs is calculated by DCE in a separate database. The calculation algorithm uses a global latitude/altitude coordinate table for airports. In cases when airport coordinates are not present in the DCE database, these are looked up on the internet and entered into the database accordingly. The actual distance flown are in reality longer than great circle distance between two airports, and this is adjusted for in the DCE emission model, as explained in section 5.4.1.

For inventory years prior to 2001, detailed LTO/aircraft type statistics are obtained from Copenhagen Airport (for this airport only), while information of total takeoff numbers for other Danish airports is provided by the Danish Transport and Construction Agency. The assignment of representative aircraft types for Copenhagen Airport is done as described above. For the remaining Danish airports, representative aircraft types are not directly assigned. Instead, appropriate average assumptions are made relating to the fuel consumption and emission data part.

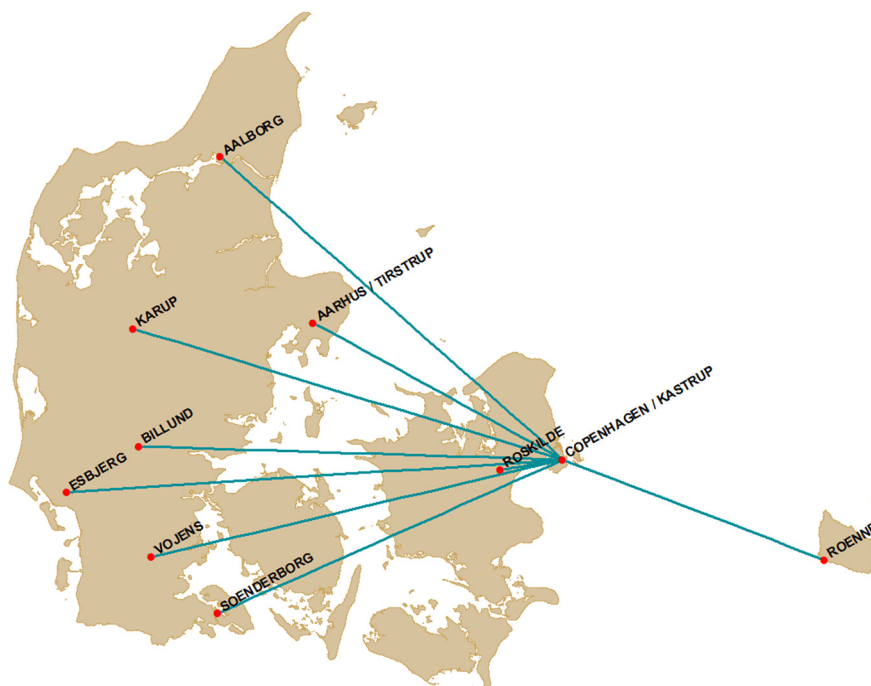


Figure 5.1 Most frequent domestic flying routes for large aircraft in Denmark.

Copenhagen Airport is the starting or end point for most of the domestic aviation made by large aircraft in Denmark (Figure 5.1; routes to Greenland/Faroe Islands are not shown). Even though many domestic flights not touching Copenhagen Airport are also reported in the flight statistics kept by the Danish Transport and Construction Agency, these flights, however, are predominantly made with small piston engine aircraft using aviation gasoline. Hence, the consumption of jet fuel by flights not using Copenhagen is merely marginal.

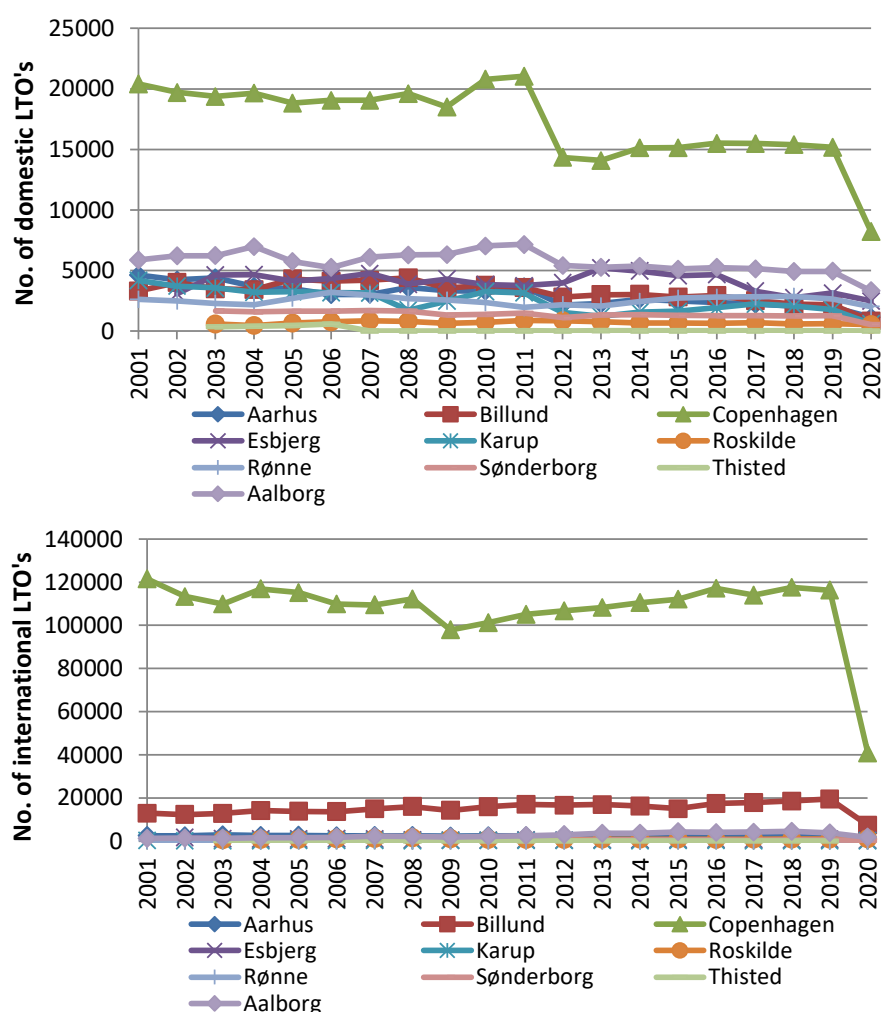


Figure 5.2 No. of LTO's for the most important airports in Denmark 2001-2020.

Figure 5.2 shows the number of domestic and international LTO's for Danish airports¹⁰, in a time series from 2001-2020.

5.1.2 Non-road working machinery and equipment

Non-road working machinery and equipment are used in agriculture, forestry and industry, for household/gardening purposes and for sailing purposes (recreational craft).

Detailed tractor fleet data for 2003-2020 and total numbers 1950-2002 for tractors in the Danish motor register are provided by Statistics Denmark (2021a, 2021b).

Total numbers for tractors (tractors in motor register and other tractors) for 1982-2005 are provided by Statistics Denmark (2021c). Total numbers for tractors (tractors in motor register and other tractors) for 1974-1981 are found in consecutive statistical publications e.g. Agricultural statistics 1974 (Statistics Denmark, 1975), as well as supplementary stock numbers per fuel type (diesel and gasoline).

¹⁰ Flights for Greenland and the Faroe Islands are included under domestic in the figure.

Supplementary new sales data in kW classes are provided by the Association of Danish Agricultural Machinery Dealers for 1982-2018. Engine load factors and annual working hours for tractors come from Bak et al. (2003).

Number of forestry machines, engine size, annual working hours and average life times are provided by the Danish Forest Association (Clemmensen, 2021).

For the most important types of building and construction machinery (industrial non-road) annual new sales data for 1996 onwards has been provided by the Association of Danish Agricultural Machinery Dealers (Fasting, 2021).

Fork lift sales data has been provided by the Association of Producers and Distributors of Fork Lifts in Denmark for 1976-2019. Further, WITS (World Industrial Truck Sales) and FEM (Federation European Material) fork lift sales figures for Denmark in 2000-2020 as well as branch distribution information has been provided by Toyota Material Handling (Christensen, 2021).

For telescopic loaders branch distribution information has been provided by Scantruck (Faurby, 2021).

From engine manufacturers engine load factors have been provided based on electronic engine power registrations (Sjøgren 2016; Mikkelsen 2016) in the case of building and construction machinery. Further, equipment size - engine size relations, equipment scrapping curves and annual working hours as a function of machinery age has been included in the model (Sjøgren 2016; Mikkelsen 2016; Brun 2018; Christensen 2018).

For the most important household and gardening machinery types annual new sales data for 2006 onwards is provided by the Association for Industrial Technics, Tools and Automation (BITVA: Brancheforeningen for industriel teknik, værktøj og automation). Until 2018, new sales data was provided by the Dealers Association of Electric Tools and Gardening Machinery (LTEH: Leverandørforeningen for Transportabelt Elværktøj og Havebrugsmaskiner). Further, equipment size - engine size relations, equipment scrapping curves and annual working hours as a function of machinery age has been provided by LTEH (Nielsen and Schösser, 2016).

For other machinery types, information on the number of different types of machines, their respective load factors, engine sizes and annual working hours has been provided by Winther et al. (2006) for the years until 2004.

The stock development from 1985-2020 for the most important types of machinery are shown in Figures 5.3-5.10 below. The stock data are also listed in Annex 11, together with figures for load factors, engine sizes and annual working hours. As regards stock data for the remaining machinery types, please refer to (Winther et al., 2006).

It is important to note that key experts in the field of industrial non-road activities assume a significant decrease in the activities for 2009 due to the global financial crisis. This reduction is in the order of 25 % for 2009 for industrial non-road in general (pers. comm. Per Stjernqvist, Volvo Construction Equipment 2010). For fork lifts, 5 % and 20 % reductions are assumed for 2008 and 2009, respectively (pers. comm. Peter H. Møller, Rocla A/S).

For tractors used in Agriculture, Industry and Commercial/Institutional and for harvesters, the total number per year are shown in the Figures 5.3-5.4, respectively.

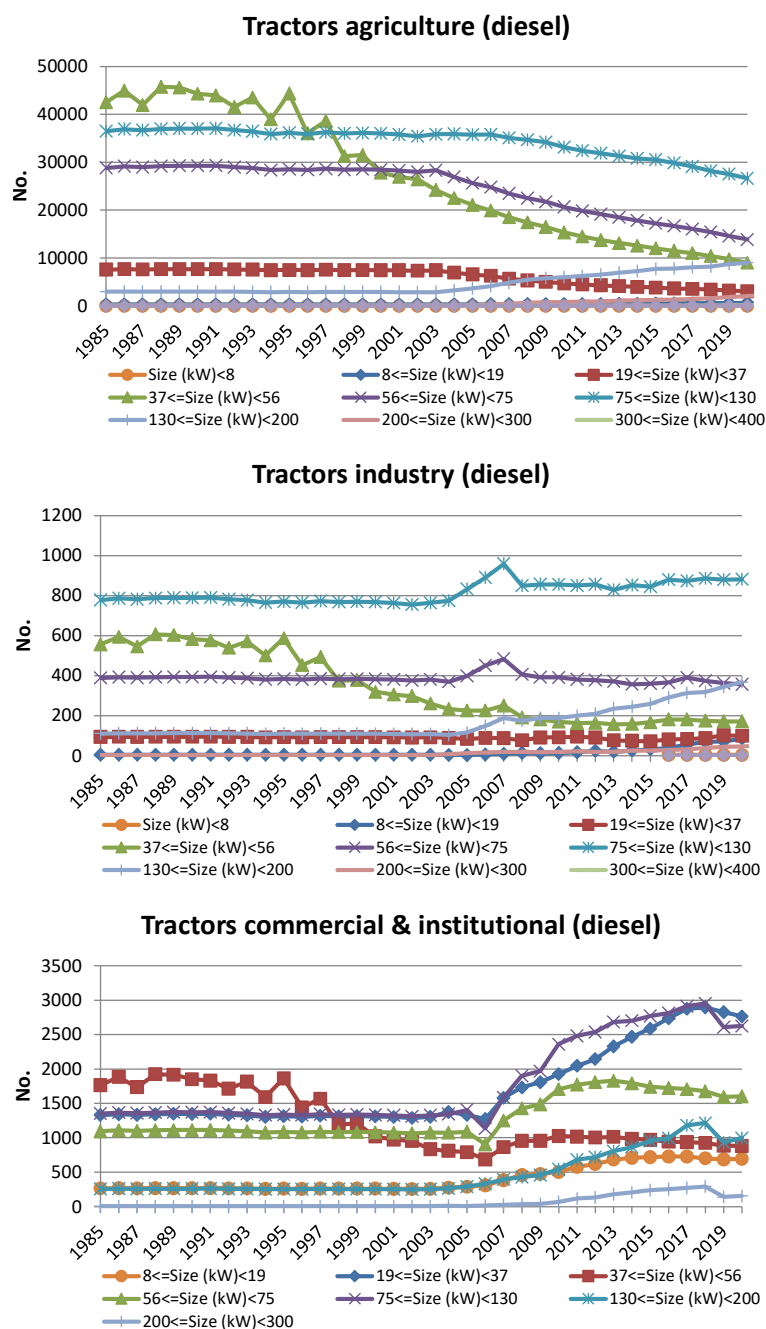


Figure 5.3 Total numbers in kW classes for tractors used in Agriculture, Industry and Commercial/Institutional from 1985 to 2020.

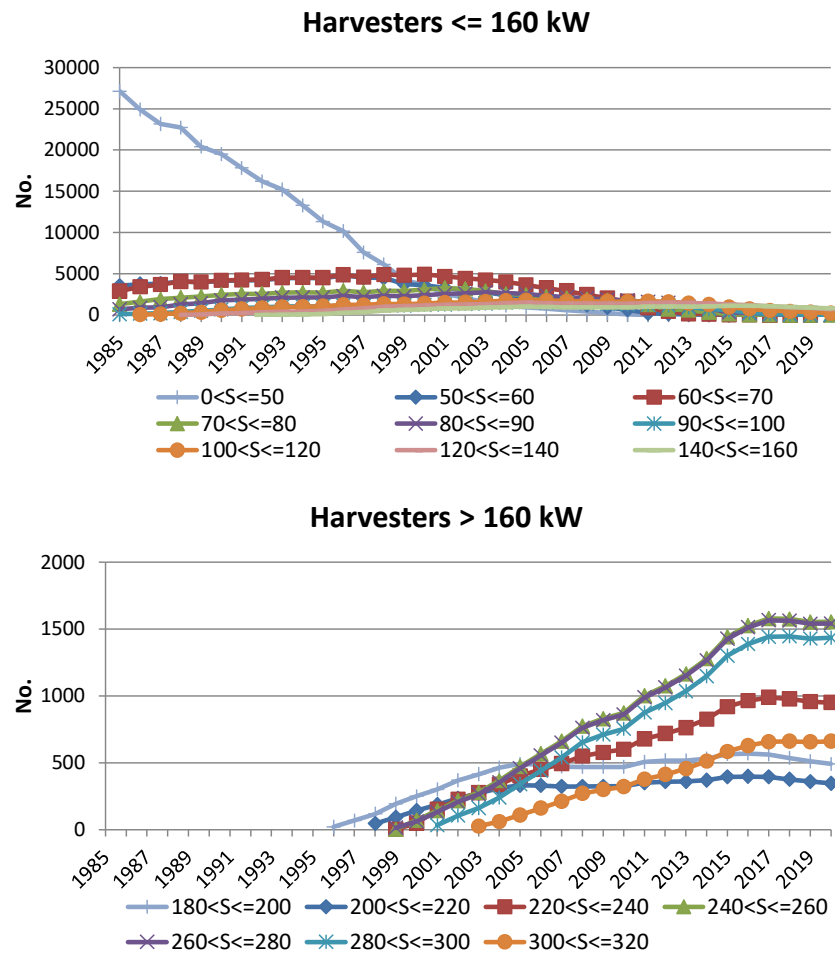


Figure 5.4 Total numbers in kW classes for harvesters from 1985 to 2020.

For the tractors used in agriculture and for harvesters, the developments towards fewer vehicles and larger engines, shown in Figure 5.5, are very clear. From 1985 to 2020, agricultural tractor and harvester numbers decrease by around 46 % and 74 %, respectively, whereas the average increase in engine size for tractors is 112 % and 362 % for harvesters, in the same time period.

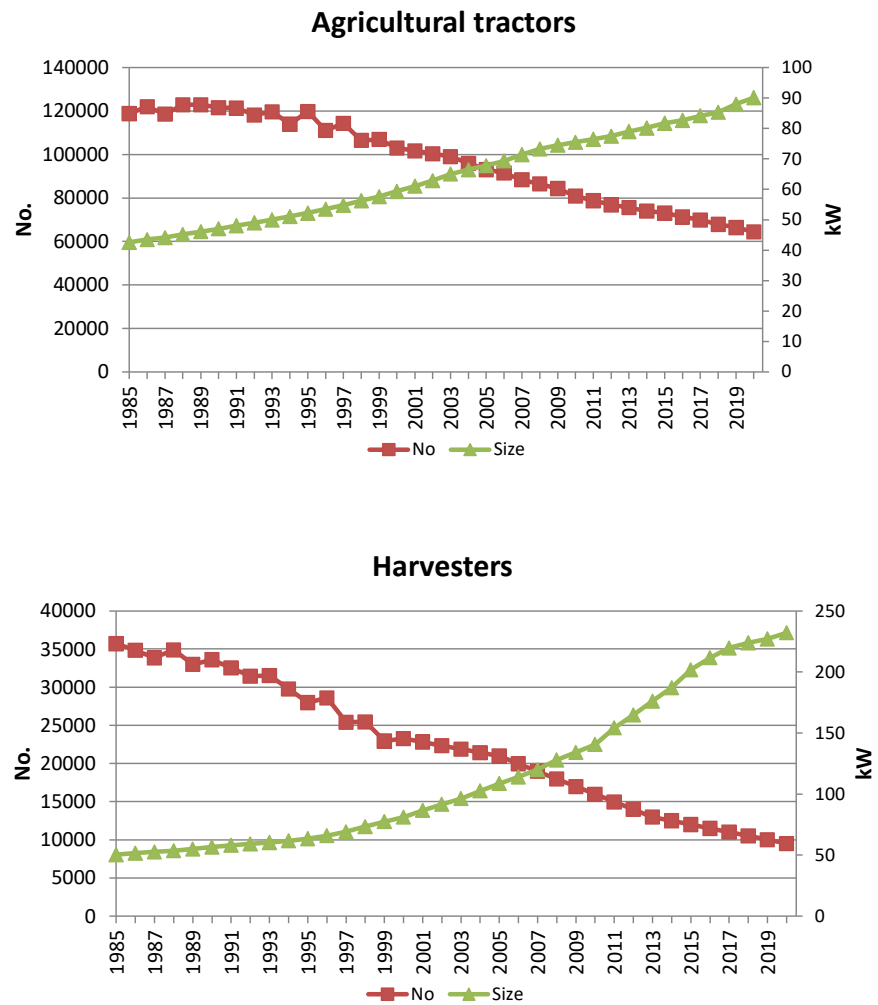


Figure 5.5 Total numbers and average engine size for tractors and harvesters from 1985 to 2020.

The most important machinery types for industrial use are different types of construction machinery and fork lifts. The Figures 5.6 and 5.7 show the 1985-2020 stock development for specific types of construction machinery and diesel fork lifts. Due to lack of data, 1996-1999 average sales data for construction machinery is used for 1995 and back. However, it is assumed that telescopic loaders first enter into use in 1986 (Jensen, Scantruck 2016). For most of the machinery types, there is an increase in machinery numbers from 1990 onwards, due to increased construction activities.

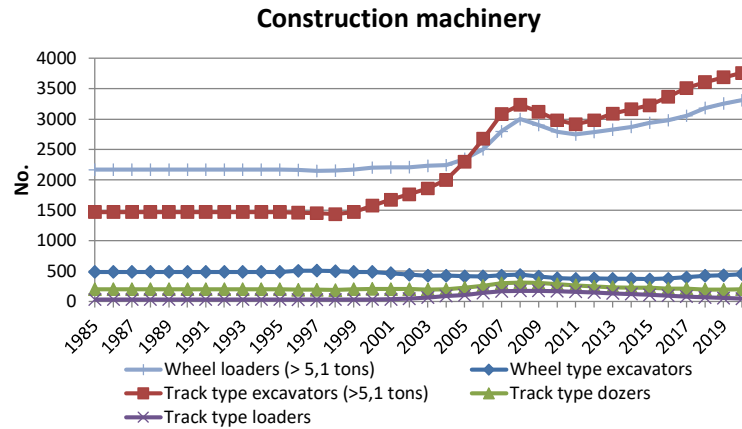
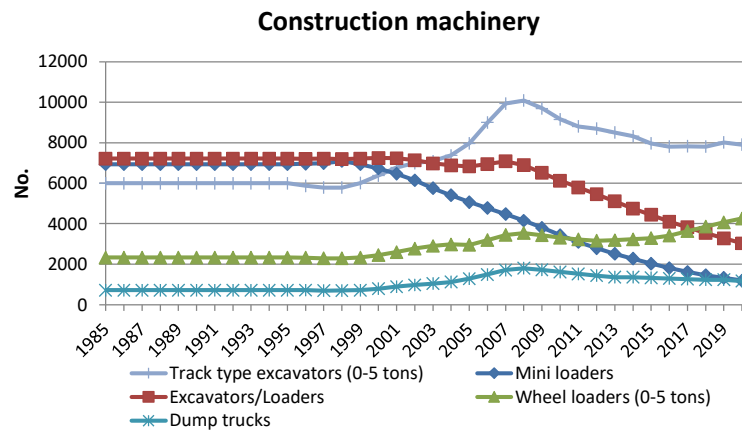


Figure 5.6 1985-2020 stock development for specific types of construction machinery.



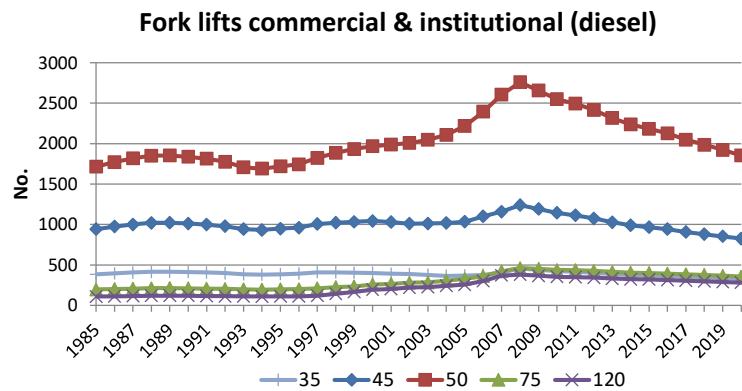


Figure 5.7 Total numbers of diesel fork lifts in kW classes from 1985 to 2020.

Figure 5.8 shows the emission layer distribution for the total stock of tractors in agriculture, industry and commercial/institutional, as well as harvesters, construction machinery (most important types, Figure 5.5) and diesel fork lifts in industry and commercial/institutional from 1985-2020.

The penetration of the different pre-Euro engine classes and engine stages complying with the gradually stricter EU stage I-IV emission limits is very visible from Figure 5.8.

The EU emission directive stage implementation years relate to engine size, and hence, for all four machinery groups the emission level shares into specific size segments will differ slightly from the picture shown in Figure 5.8.

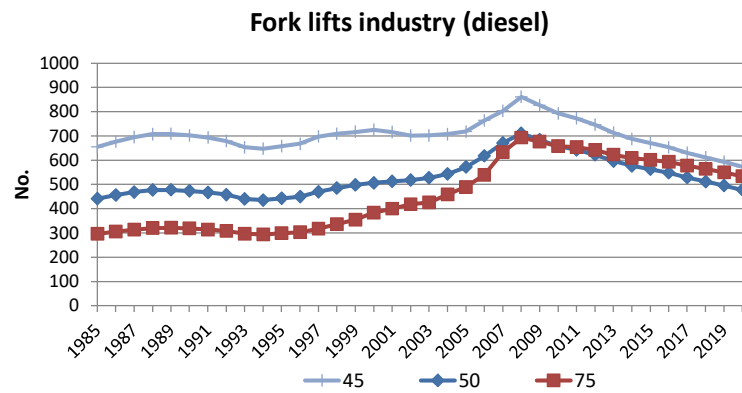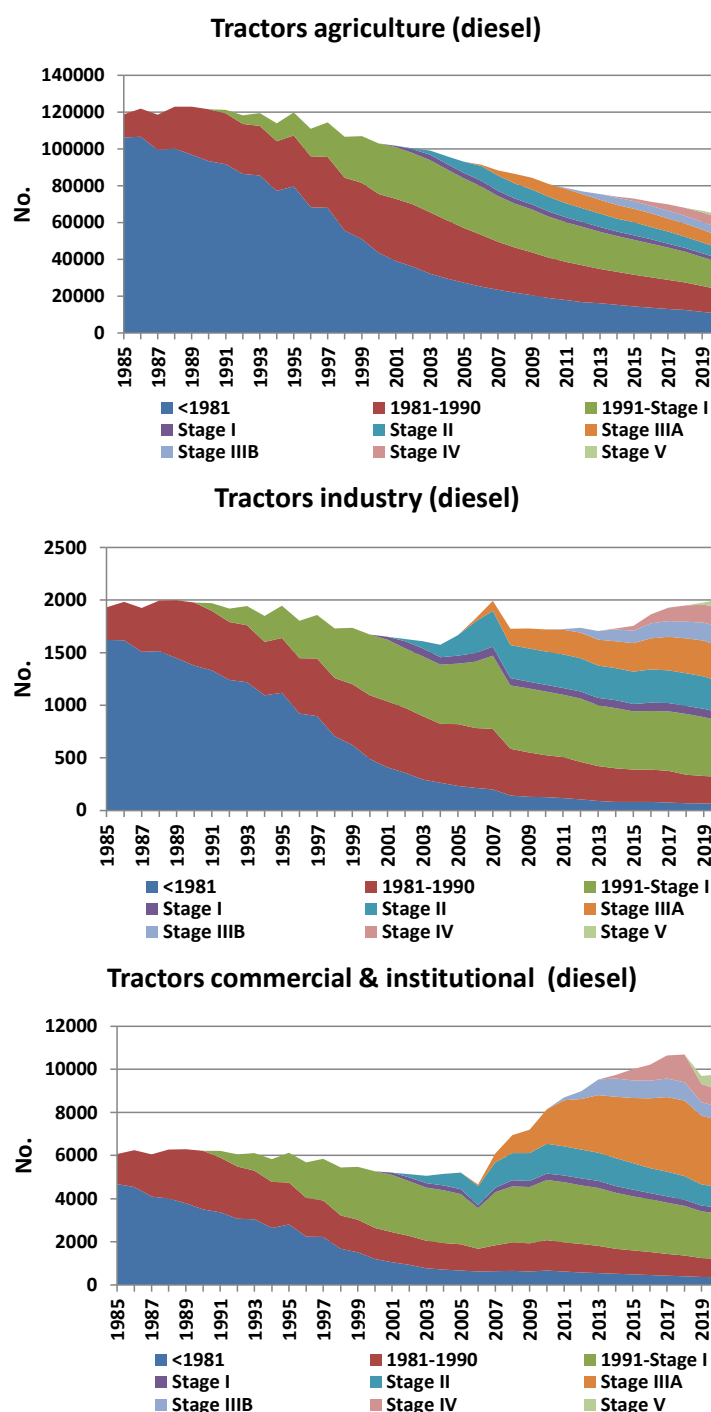

Continued

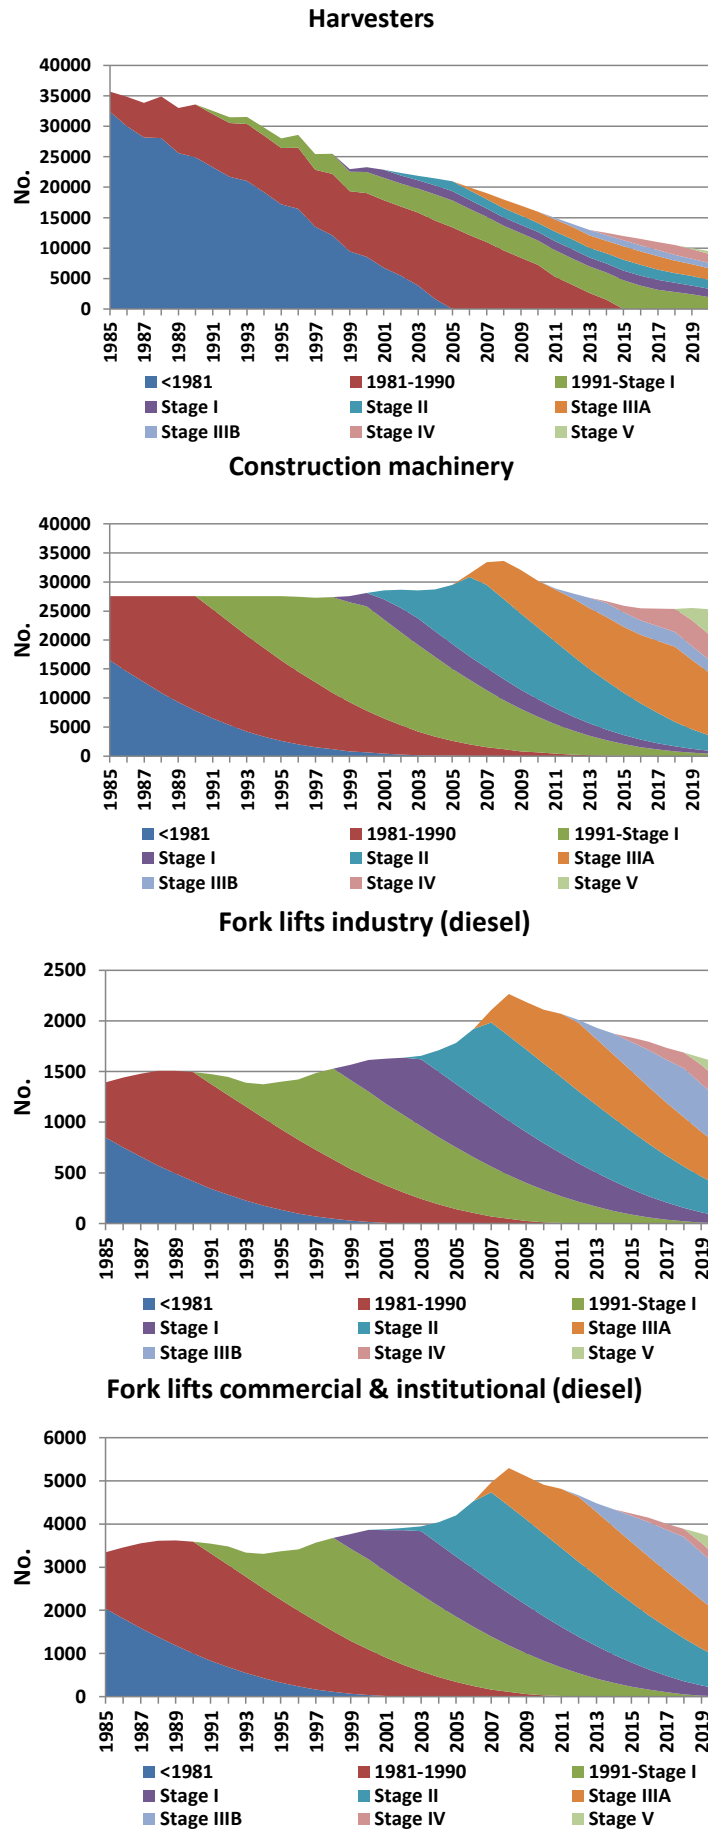


Figure 5.8 Layer distribution for tractors, harvesters, construction machinery and diesel fork lifts (1985 to 2020).

The 1990-2020 stock development for the most important household and gardening machinery types is shown in Figure 5.9. The activities made with private and professional equipment types are grouped into the Residential (1.A.4b) and Commercial/Institutional (1.A.4.a) inventory sectors, respectively.

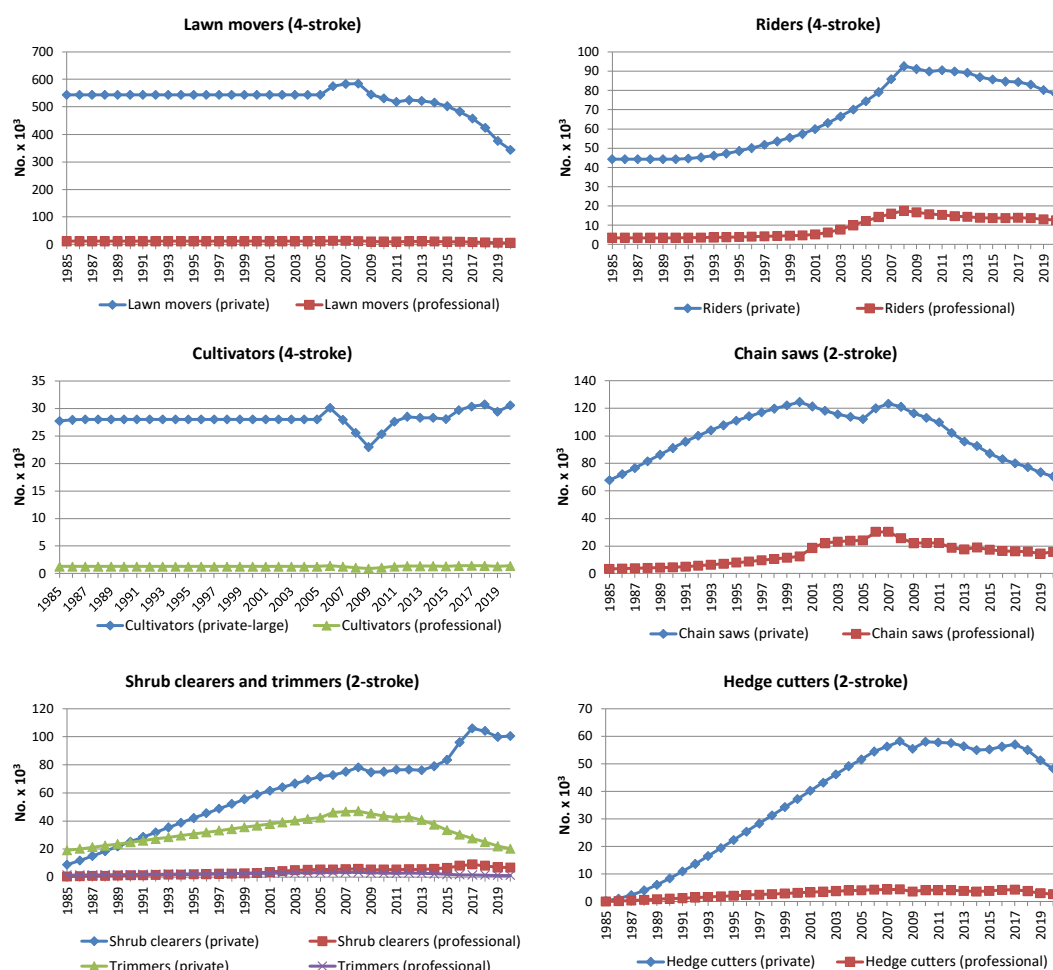


Figure 5.9 Stock developments 1985-2020 for the most important household and gardening machinery types.

The total stock development for the most important household and gardening machinery types is shown in Figure 5.10 split into 2-stroke and 4-stroke machinery for Residential (1.A.4b) and Commercial/Institutional (1.A.4.a). For the same stock division, the emission layer distribution is also shown in Figure 5.10. The penetration of new technologies occur faster for working machinery in Commercial/Institutional (1.A.4.a) compared with Residential (1.A.4.b), due to the shorter maximum life times for the working equipment used by professionals.

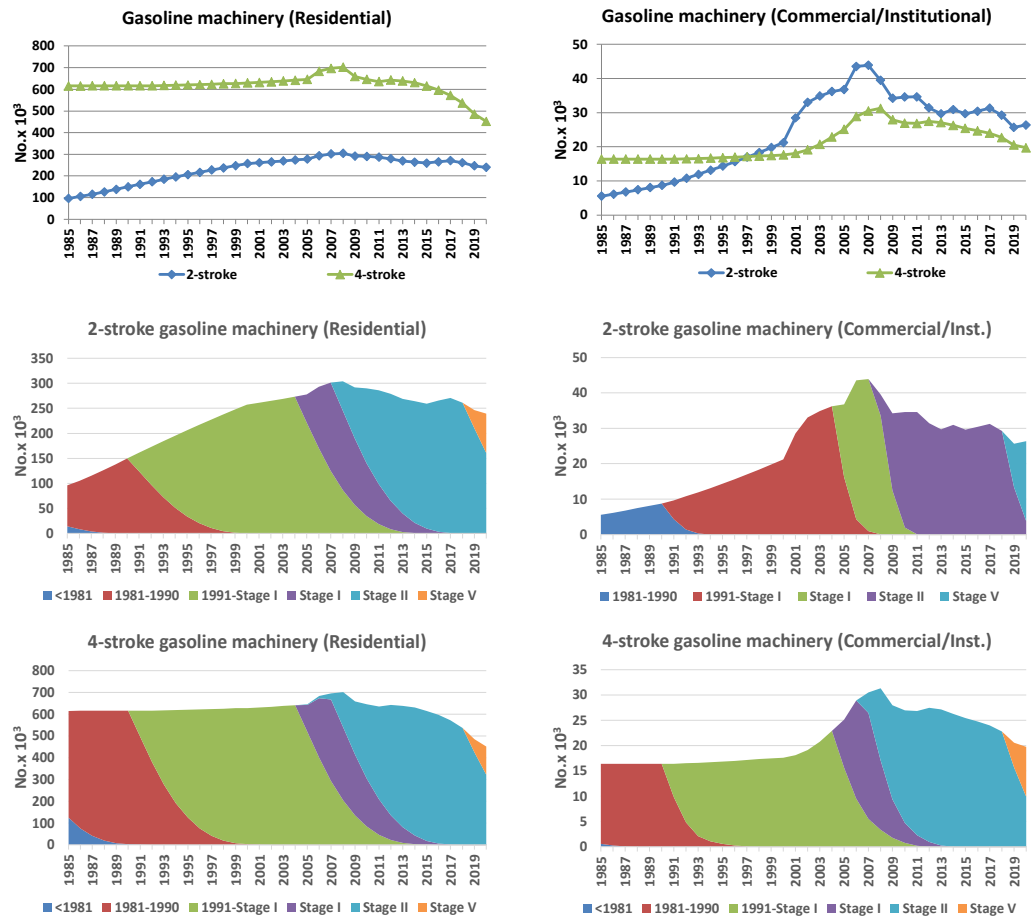


Figure 5.10 Layer distribution for the most important household and gardening machinery types split into residential and commercial/institutional (1985-2020).

Figure 5.11 shows the development in numbers of different recreational craft from 1985-2020. The 2004 stock data for recreational craft are repeated for 2005+, due to lack of data from the Danish Sailing Association.

For diesel boats, increases in stock and engine size are expected during the whole period, except for the number of motor boats (< 27 ft.) and the engine sizes for sailing boats (<26 ft.), where the figures remain unchanged. A decrease in the total stock of sailing boats (<26 ft.) by 21 % and increases in the total stock of yawls/cabin boats and other boats (<20 ft.) by around 25 % are expected. Due to a lack of information specific to Denmark, the shifting rate from 2-stroke to 4-stroke gasoline engines is based on a German non-road study (IFEU, 2004).

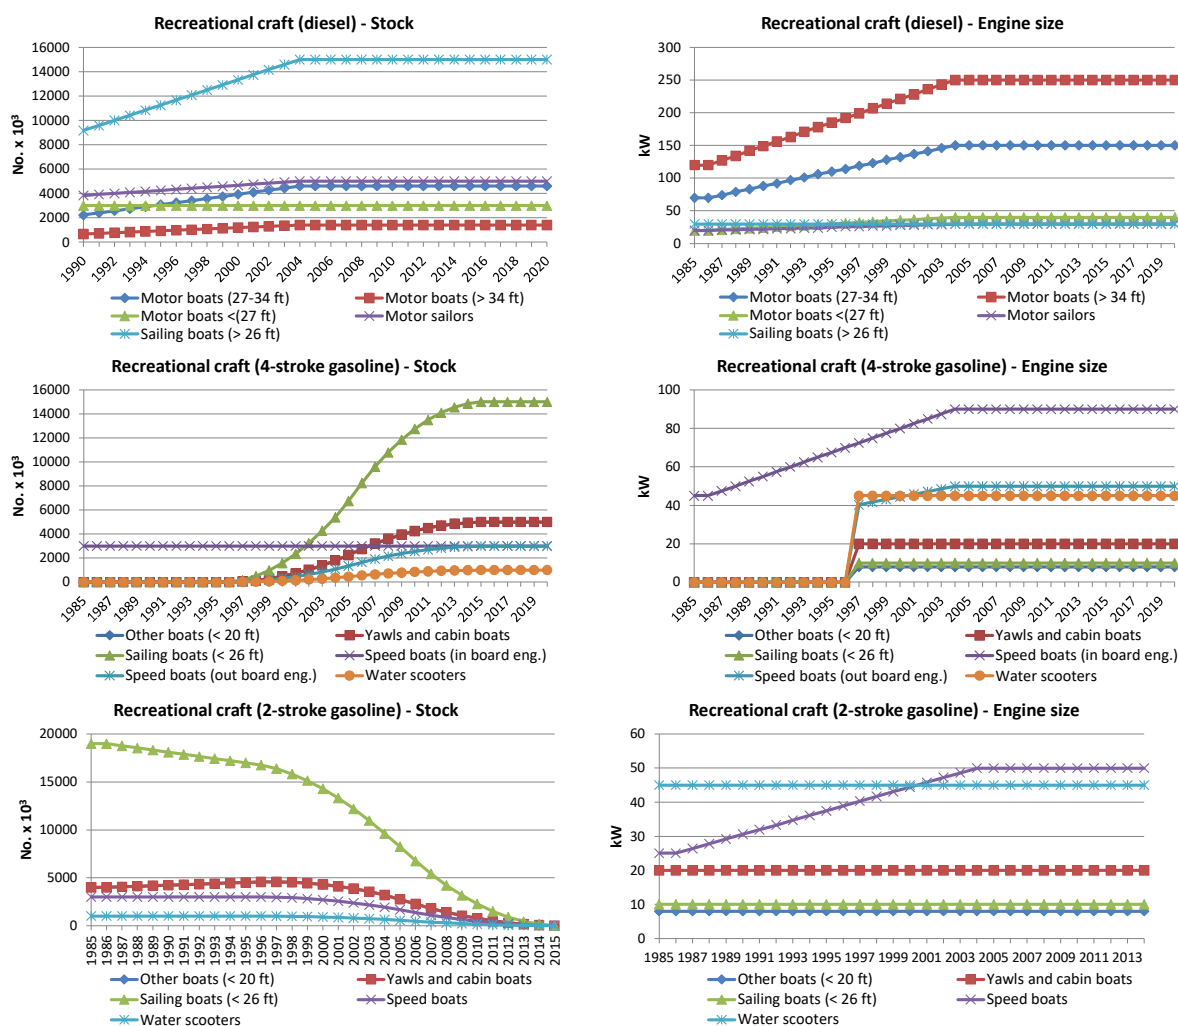


Figure 5.11 Stock and engine size development for recreational craft 1985-2020.

5.1.3 National sea transport

Table 5.1 lists the most important domestic ferry routes (regional ferries) in Denmark in the period 1990-2020. For these ferry routes and the years 1990-2005, the following detailed traffic and technical data have been gathered by Winther (2008): Ferry name, engine size (MCR), engine type, fuel type, average load factor, auxiliary engine size, share of annual trips and sailing time (single trip).

For 2006-2020, the above mentioned traffic and technical data for specific ferries have been provided by Nielsen (2021) in the case of Mols-Linien (Sjællands Odde-Ebeltoft, Sjællands Odde-Århus, Kalundborg-Århus, Køge-Rønne, Tårs-Spodsbjerg), by Jørgensen (2017) for Færgen A/S (Køge-Rønne, Tårs-Spodsbjerg, Kalundborg-Samsø), by Kruse (2015) for Samsø Rederi (Hou-Sælvig), by Mortensen (2015) for Færgeselskabet Læsø (Frederikshavn-Læsø) and by Eriksen (2017) for Ærøfærgerne (Svendborg-Ærøskøbing). For Esbjerg/Hanstholm/-Hirtshals-Torshavn traffic and technical data have been provided by Dávastovu (2010).

Table 5.1 Regional ferry routes comprised in the Danish inventory.

Ferry service	Service period
Esbjerg-Torshavn	1990-1995, 2009+
Halsskov-Knudshoved	1990-1999
Hanstholm-Torshavn	1991-1992, 1999+
Hirtshals-Torshavn	2010
Hou-Sælvig	1990+
Hundested-Grenaa	1990-1996
Frederikshavn-Læsø	1990+
Kalundborg-Juelsminde	1990-1996
Kalundborg-Samsø	1990+
Kalundborg-Århus	1990+
Korsør-Nyborg, DSB	1990-1997
Korsør-Nyborg, Vognmandsruten	1990-1999
København-Rønne	1990-2004
Køge-Rønne	2004+
Sjællands Odde-Ebeltoft	1990+
Sjællands Odde-Århus	1999+
Svendborg-Ærøskøbing	1990+
Tårs-Spødsbjerg	1990+



Figure 5.12 Domestic ferry routes in Denmark (2020).

Table 5.2 lists the small ferry routes (island and short cut ferries) included in the Danish inventory for the period 1990-2020. For these ferry routes and the years 1990-2020, the following detailed traffic and technical data have been gathered by Rasmussen (2017) and Andersen (2019): ferry name, year of ser-

vice, engine size (MCR), engine year, and sailing time (single trip). Supplementary data for engine type, fuel type and average load factor is provided by Kristensen (2017).

Table 5.2 Small ferry routes included in the Danish inventory.

Ferry service	Service period
Assens-Baagø	1990+
Ballebro-Hardeshøj	1990+
Bandholm-Askø	1990+
Barsø Landing-Barsø	2018+
Branden-Fur	1990+
Bøjden-Fynshav	1990+
Esbjerg-Fanø	1990+
Feggesund overfart	1990+
Fejøl-Kragenæs	1990+
Femøl-Kragenæs	1990+
Frederikssund-Roskilde	1999-2000
Fåborg-Avernakø-Lyø	1990+
Fåborg-Søby	1990+
Grenaa-Anholt	1990+
Gudhjem-Christiansø	2015+
Hals-Egense	1994+
Havnsø-Sejerø	1990+
Holbæk-Orø	1990+
Horsens-Endelave	1990+
Hov-Tunø	1990+
Hundested-Rørvig	1990+
Hvalpsund-Sundsøre	1990+
Kastrup-Rønne	1990
Kleppen-Venø	1990+
Korsør-Lohals	1990+
Kragenæs-Askø	2020+
København-Århus	1992-1993
Næssund overfart	1990+
Rudkøbing-Marstal	-2013
Rudkøbing-Strynø	1990+
Stignæs-Agersø	1990+
Stignæs-Omø	1990+
Stubbekøbing-Bogø	1990+
Svendborg-Skarø-Drejøl	1990+
Søby-Fynshav	2009+
Søby-Mommark	-2009
Thyborøn-Agger	1990+
Udbyhøj Nord - Udbyhøj Syd	2017+
Aarø-Aarøsund	1990+

The number of round trips per ferry route from 1990 to 2020 is provided by Statistics Denmark (2021). Figure 5.12 show the regional ferry routes in 2020 (Esbjerg/Hanstholm/Hirtshals-Torshavn not shown). The traffic data are also listed in Annex 12, together with different ferry specific technical and operational data.

For all ferry routes, detailed data in terms of ferry name, engine size (MCR), engine type, fuel type, average load factor, auxiliary engine size, number of trips and sailing time (single trip) is shown in Annex 12 for the years 1985-2020. There is a lack of historical traffic data for 1985-1989, and hence, data for

1990 is used for these years, to support the fuel consumption and emission calculations.

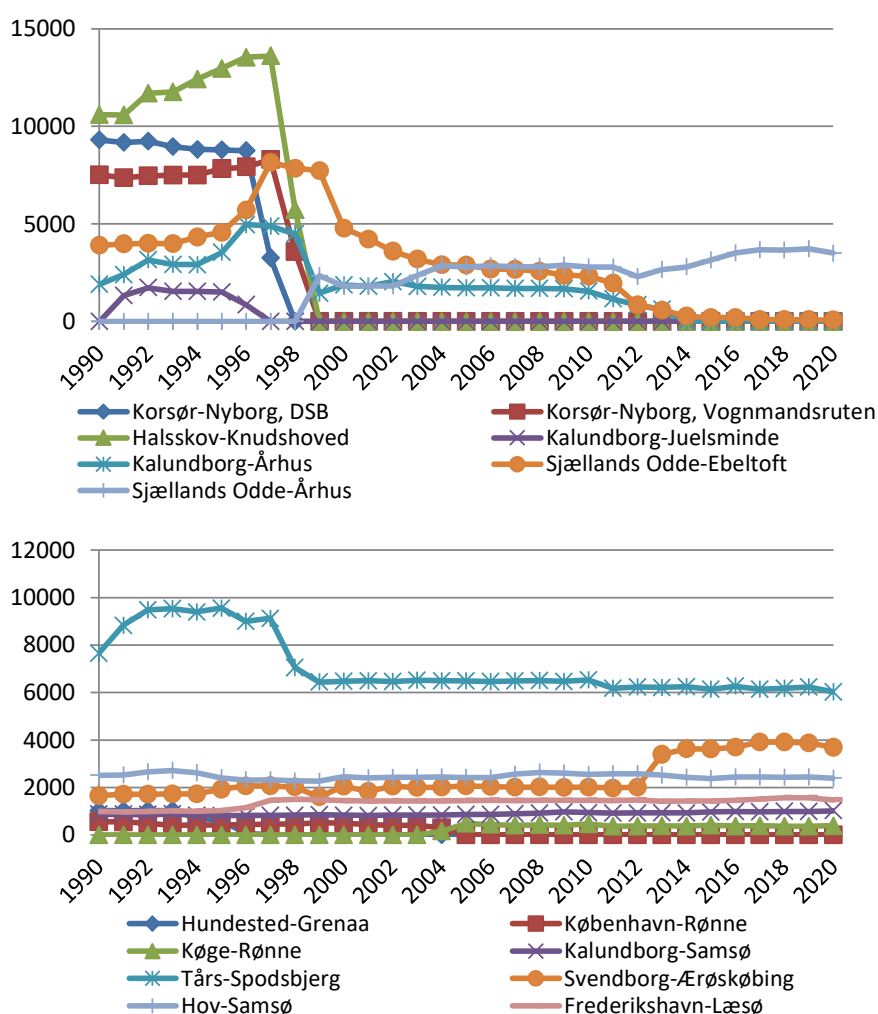


Figure 5.13 No. of round trips for the most important ferry routes in Denmark 1990-2020.

It is seen from Table 5.1 (and Figure 5.13) that several ferry routes were closed in the period from 1996 to 1998, mainly due to the opening of the Great Belt Bridge (connecting Zealand and Funen) in 1997. Hundested-Grenaa and Kalundborg-Juelsminde was closed in 1996, Korsør-Nyborg (DSB) closed in 1997, and Halsskov-Knudshoved and Korsør-Nyborg (Vognmandsruten) was closed in 1998. The ferry line København-Rønne was replaced by Køge-Rønne in 2004 and from 1999, a new ferry connection was opened between Sjællands Odde and Århus.

The fuel sold for freight transport by Royal Arctic Line between Aalborg (Denmark) and Greenland is included under other national sea transport in the Danish inventories. In this case, all fuel is being bought in Denmark (Rasmussen, 2021). The fuel used by freight transport between Denmark and the Faroe Islands (Eimskip) is bought outside Denmark (Helgason, 2021). Hence, this fuel consumption is not included in the Danish inventories at all.

Fuel used for the remaining part of the traffic between two Danish ports, other national sea transport, is taken as the difference between 1) DEA national fuel sales for national sea transport minus fuel consumption at Danish off shore

installations (off shore reduced fuel sales¹¹) and 2) the bottom-up calculated fuel consumption for Danish ferries.

For years when the fuel estimates for ferries (not including the ferry to the Faroe Islands) are higher than the “off shore reduced” fuel sold for national sea transport, fuel is taken from fisheries in the case of marine diesel (1985-1999). For heavy fuel oil, the missing fuel amount is taken from stationary sources (1985-1986, 1988, 1994-1996) and international sea transport (2015 onwards).

The LNG fuel calculated for Danish ferries is slightly higher than the LNG fuel sales for national navigation reported in the DEA fuel statistics. Subsequently, an inventory fuel balance is made to account for the total LNG fuel sold reported in the DEA fuel statistics.

For fishing vessels the following log data are provided by the Danish Fisheries Agency for each fishing trip made by Danish registered fishing vessels from 1985-2020: Vessel registration number, build year, type, overall length (OAL), brutto tonnes (BT), total installed engine power (kW) and hours at sea (Hernov, 2021). Average engine load factors (%) are taken from Winther and Martinsen (2020) based on data provided by Hanstholm Fisheries Association (Amdissen, 2020).

Figure 5.14 show hours at sea for the Danish fishing vessels split into OAL classes for the years 1990-2020.

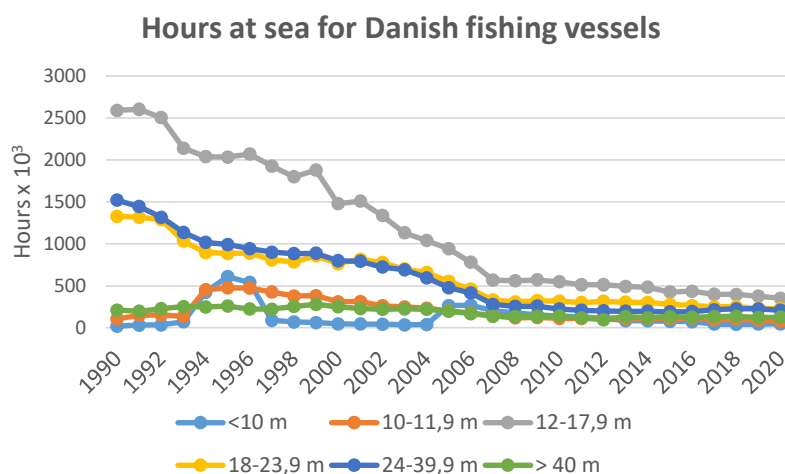


Figure 5.14 Total hours at sea for Danish fishing vessels 1990-2020.

5.1.4 Other sectors

The activity data for military, railways and international sea transport consists of fuel consumption information from DEA (2021a).

For international sea transport, the basis is in principle fuel sold in Danish ports for vessels with a foreign destination (i.e. outside the Kingdom of Denmark), as prescribed by the IPCC guidelines. However, it must be noted that fuel sold for sailing activities between Denmark and Greenland/Faroe Islands

¹¹ According to the Danish Energy Authority, the diesel fuel sold for off shore installations are reported as sold for national navigation by the fuel sales reporting oil companies.

are reported as international in the DEA energy statistics. Hence, for inventory purposes in order to follow the IPCC guidelines, the fuel estimated for the ferry routes Esbjerg/Hanstholm/Hirtshals-Torshavn, and fuel bought by Royal Arctic Line is transferred from international sea transport to national sea transport in fuel sales, prior to inventory fuel input.

For years when bottom up diesel estimates for national sea transport are higher than DEA reported fuel sold for national sea transport, diesel is transferred from fisheries to national sea transport in the inventories. In addition, the bottom up diesel estimate for recreational craft is subtracted from fisheries and grouped in the “Other” inventory category together with military activities.

Summarized up per fuel type, the above described fuel transferals involving the sectors national and international sea transport, fisheries and stationary industrial sources becomes zero, thus leaving the national energy balance unchanged.

For all sectors, fuel consumption figures are given in Annex 15 for the years 1990 and 2020 in CollectER format, and fuel consumption time series are given in Annex 16 in CRF and NFR format.

5.2 Emission legislation

For other modes of transport and non-road machinery, the engines have to comply with the emission legislation limits agreed by the EU and different UN organisations in terms of NO_x, CO, VOC and TSP emissions and fuel sulphur content. In terms of greenhouse gases, the emission legislation requirements for VOC influence the emissions of CH₄, the latter emission component forming a part of total VOC. Only for ships, legislative limits for specific fuel consumption have been internationally agreed in order to reduce the emissions of CO₂.

For non-road working machinery and equipment, and recreational craft and railway locomotives/motor cars, the emission directives list specific emission limit values (g per kWh) for CO, VOC, NO_x (or VOC + NO_x) and TSP, depending on engine size (kW for diesel, ccm for gasoline) and date of implementation (referring to engine market date).

For diesel, the directives 97/68 and 2004/26 (Table 5.3) relate to Stage I-IV non-road machinery other than agricultural and forestry tractors and the directives have different implementation dates for machinery operating under transient and constant loads. The latter directive also comprises emission limits for Stage IIIA and IIIB railways machinery (Table 5.7). For Stage I-IV tractors the relevant directives are 2000/25 and 2005/13 (Table 5.3).

For emission approval of the EU Stage I, II and IIIA engine technologies, emissions (and fuel consumption) measurements are made using the steady state test cycle ISO 8178 C1, referred to as the Non-Road Steady Cycle (NRSC), see e.g. www.dieselnet.com. In addition to the NRSC test, the newer Stage IIIB and IV (and optionally Stage IIIA) engine technologies are tested under more realistic operational conditions using the new Non-Road Transient Cycle (NRTC).

For gasoline, the directive 2002/88 distinguishes between Stage I and II hand-held (SH) and not hand-held (NS) types of machinery (Table 5.4). Emissions are tested using one of the specific constant load ISO 8178 test cycles (D2, G1, G2, G3) depending on the type of machinery.

For Stage V machinery, EU directive 2016/1628 relate to non-road machinery other than agricultural tractors and railways machinery (Table 5.3) and non-road gasoline machinery (Table 5.4). EU directive 167/2013 relate to Stage V agricultural and forestry tractors (Table 5.3). The Stage V emission limits are also shown in Annex 11.

Table 5.3 Overview of EU emission directives relevant for diesel fuelled non-road machinery.

Stage	Engine size [kW]	CO	VOC	NO _x	VOC+NO _x	PM	Diesel machinery			Tractors	
							Implement. date			EU	Impl.
							EU Directive	Transient	Constant	Directive	date
Stage I											
A	130≤P<560	5	1.3	9.2	-	0.54	97/68	1/1 1999	-	2000/25	1/7 2001
B	75≤P<130	5	1.3	9.2	-	0.7		1/1 1999	-		1/7 2001
C	37≤P<75	6.5	1.3	9.2	-	0.85		1/4 1999	-		1/7 2001
Stage II											
E	130≤P<560	3.5	1	6	-	0.2	97/68	1/1 2002	1/1 2007	2000/25	1/7 2002
F	75≤P<130	5	1	6	-	0.3		1/1 2003	1/1 2007		1/7 2003
G	37≤P<75	5	1.3	7	-	0.4		1/1 2004	1/1 2007		1/1 2004
D	18≤P<37	5.5	1.5	8	-	0.8		1/1 2001	1/1 2007		1/1 2002
Stage IIIA											
H	130≤P<560	3.5	-	-	4	0.2	2004/26	1/1 2006	1/1 2011	2005/13	1/1 2006
I	75≤P<130	5	-	-	4	0.3		1/1 2007	1/1 2011		1/1 2007
J	37≤P<75	5	-	-	4.7	0.4		1/1 2008	1/1 2012		1/1 2008
K	19≤P<37	5.5	-	-	7.5	0.6		1/1 2007	1/1 2011		1/1 2007
Stage IIIB											
L	130≤P<560	3.5	0.19	2	-	0.025	2004/26	1/1 2011	-	2005/13	1/1 2011
M	75≤P<130	5	0.19	3.3	-	0.025		1/1 2012	-		1/1 2012
N	56≤P<75	5	0.19	3.3	-	0.025		1/1 2012	-		1/1 2012
P	37≤P<56	5	-	-	4.7	0.025		1/1 2013	-		1/1 2013
Stage IV											
Q	130≤P<560	3.5	0.19	0.4	-	0.025	2004/26	1/1 2014	1/1 2014	2005/13	1/1 2014
R	56≤P<130	5	0.19	0.4	-	0.025		1/10 2014	1/10 2014		1/10 2014
Stage V ^A											
NRE-v/c-7	P>560	3.5	0.19	3.5		0.045	2016/1628		2019	167/2013 ^B	2019
NRE-v/c-6	130≤P≤560	3.5	0.19	0.4		0.015			2019		2019
NRE-v/c-5	56≤P<130	5.0	0.19	0.4		0.015			2020		2020
NRE-v/c-4	37≤P<56	5.0			4.7	0.015			2019		2019
NRE-v/c-3	19≤P<37	5.0			4.7	0.015			2019		2019
NRE-v/c-2	8≤P<19	6.6			7.5	0.4			2019		2019
NRE-v/c-1	P<8	8.0			7.5	0.4			2019		2019
Generators	P>560	0.67	0.19	3.5		0.035			2019		2019

A = For selected machinery types, Stage V includes emission limit values for particle number.

B = Article 63 in 2016/1628 revise Article 19 in 167/2013 to include Stage V limits as described in 2016/1628.

Table 5.4 Overview of the EU emission directives relevant for gasoline fuelled non-road machinery.

	Category	Engine size [ccm]	CO [g per kWh]	HC [g per kWh]	NO _x [g per kWh]	HC+NO _x [g per kWh]	Impl. date
EU Directive 2002/88	Stage I						
Hand held	SH1	S<20	805	295	5.36	-	1/2 2005
	SH2	20≤S<50	805	241	5.36	-	1/2 2005
	SH3	50≤S	603	161	5.36	-	1/2 2005
Not hand held	SN3	100≤S<225	519	-	-	16.1	1/2 2005
	SN4	225≤S	519	-	-	13.4	1/2 2005
	Stage II						
Hand held	SH1	S<20	805	-	-	50	1/2 2008
	SH2	20≤S<50	805	-	-	50	1/2 2008
	SH3	50≤S	603	-	-	72	1/2 2009
Not hand held	SN1	S<66	610	-	-	50	1/2 2005
	SN2	66≤S<100	610	-	-	40	1/2 2005
	SN3	100≤S<225	610	-	-	16.1	1/2 2008
	SN4	225≤S	610	-	-	12.1	1/2 2007
EU Directive 2016/1628	Stage V						
Hand held (<19 kW)	NRSh-v-1a	S<50	805	-	-	50	2019
	NRSh-v-1b	50≤S	805	-	-	72	2019
Not hand held (P<19 kW)	NRS-vr/vi-1a	80≤S<225	610	-	-	10	2019
	NRS-vr/vi-1b	S≥225	610	-	-	8	2019
Not hand held (19≤P<30 kW)	NRS-v-2a	S≤1000	610	-	-	8	2019
	NRS-v-2b	S>1000	4.40*	-	-	2.70*	2019
Not hand held (30≤P≤56 kW)	NRS-v-3	any	4.40*	-	-	2.70*	2019

* Or any combination of values satisfying the equation $(\text{HC}+\text{NO}_x) \times \text{CO}^{0.784} \leq 8.57$ and the conditions $\text{CO} \leq 20.6$ g/kWh and $(\text{HC}+\text{NO}_x) \leq 2.7$ g/kWh.

For recreational craft, Directive 2003/44 comprises the Stage 1 emission legislation limits for diesel engines, and for 2-stroke and 4-stroke gasoline engines, respectively. The CO and VOC emission limits depend on engine size (kW) and the inserted parameters presented in the calculation formulas in Table 5.5. For NO_x, a constant limit value is given for each of the three engine types. For TSP, the constant emission limit regards diesel engines only.

In Table 5.6, the Stage II emission limits are shown for recreational craft. CO and HC+NO_x limits are provided for gasoline engines depending on the rated engine power and the engine type (stern-drive vs. outboard) while CO, HC+NO_x, and particulate emission limits are defined for Compression Ignition (CI) engines depending on the rated engine power and the swept volume.

Table 5.5 Overview of the EU emission directive Directive 2003/44 for recreational craft.

Engine type	Impl. date	CO=A+B/P ⁿ			HC=A+B/P ⁿ			NO _x	TSP
		A	B	n	A	B	n		
2-stroke gasoline	1/1 2007	150.0	600.0	1.0	30.0	100.0	0.75	10.0	-
4-stroke gasoline	1/1 2006	150.0	600.0	1.0	6.0	50.0	0.75	15.0	-
Diesel	1/1 2006	5.0	0.0	0	1.5	2.0	0.5	9.8	1.0

Table 5.6 Overview of the EU emission directive Directive 2013/53 for recreational craft.

Diesel engines					
Swept Volume, SV l/cyl.	Rated Engine Power, P _N kW	Impl. date	CO g/kWh	HC + NO _x g/kWh	PM g/kWh
SV < 0.9	P _N < 37				
	37 ≤ P _N < 75 (*)	18/1 2017	5	4.7	0.30
	75 ≤ P _N < 3 700	18/1 2017	5	5.8	0.15
0.9 ≤ SV < 1.2	P _N < 3 700	18/1 2017	5	5.8	0.14
1.2 ≤ SV < 2.5		18/1 2017	5	5.8	0.12
2.5 ≤ SV < 3.5		18/1 2017	5	5.8	0.12
3.5 ≤ SV < 7.0		18/1 2017	5	5.8	0.11
Gasoline engines					
Engine type	Rated Engine Power, P _N kW	Impl. date	CO g/kWh	HC + NO _x g/kWh	PM g/kWh
Stern-drive and inboard engines	P _N ≤ 373	18/1 2017	75	5	-
	373 ≤ P _N ≤ 485	18/1 2017	350	16	-
	P _N > 485	18/1 2017	350	22	-
Outboard engines and PWC engines (**)	P _N ≤ 4.3	18/1 2017	500 – (5.0 x P _N)	15.7 + (50/PN ^{0.9})	-
	4.3 ≤ P _N ≤ 40	18/1 2017	500 – (5.0 x P _N)	15.7 + (50/PN ^{0.9})	-
	P _N > 40	18/1 2017	300		-

(*) Alternatively, this engine segment shall not exceed a PM limit of 0.2 g/kWh and a combined HC + NO_x limit of 5.8 g/kWh.

(**) Small and medium size manufacturers making outboard engines ≤ 15 kW have until 18/1 2020 to comply.

Table 5.7 Overview of the EU emission directives relevant for railway locomotives and motorcars.

				CO	HC	NO _x	HC+NO _x	PM	
EU directive		Engine size [kW]		g/kWh					Impl. date
Locomotives	2004/26	Stage IIIA							
		130<=P<560	RL A	3.5	-	-	4	0.2	1/1 2007
		560<P	RH A	3.5	0.5	6	-	0.2	1/1 2009
		2000<=P and piston displacement >= 5 l/cyl.	RH A	3.5	0.4	7.4	-	0.2	1/1 2009
	2004/26	Stage IIIB	RB	3.5	-	-	4	0.025	1/1 2012
	2016/1628	Stage V							
		0<P	RLL-v/c-1	3.5	-	-	4	0.025	2021
Motor cars	2004/26	Stage IIIA							
		130<P	RC A	3.5	-	-	4	0.2	1/1 2006
	2004/26	Stage IIIB							
		130<P	RC B	3.5	0.19	2	-	0.025	1/1 2012
		2016/1628	Stage V						
		0<P	RLR-v/c-1	3.5	0.19	2	-	0.015	2021

Aircraft engine emissions of NO_x, CO, VOC and smoke are regulated by ICAO (International Civil Aviation Organization). The engine emission certification standards are contained in Annex 16 — Environmental Protection, Volume II — to the Convention on International Civil Aviation (ICAO Annex 16, 2008, plus amendments). The emission standards relate to the total emissions (in grams) from the so-called LTO (Landing and Take Off) cycle divided by the rated engine thrust (kN). The ICAO LTO cycle contains the idealised aircraft movements below 3000 ft (915 m) during approach, landing, airport taxiing, take off and climb out.

For smoke, all aircraft engines manufactured from 1 January 1983 have to meet the emission limits agreed by ICAO. For NO_x, CO, VOC the emission legislation is relevant for aircraft engines with a rated engine thrust larger than 26.7 kN. In the case of CO and VOC, the ICAO regulations apply for engines manufactured from 1 January 1983.

For NO_x, the emission regulations fall in five categories.

1. For engines of a type or model for which the date of manufacture of the first individual production model was before 1 January 1996, and for which the production date of the individual engine was before 1 January 2000.
2. For engines of a type or model for which the date of manufacture of the first individual production model is on or after 1 January 1996, or for individual engines with a production date on or after 1 January 2000.
3. For engines of a type or model for which the date of manufacture of the first individual production model is on or after 1 January 2004.
4. For engines of a type or model for which the date of manufacture of the first individual production model is on or after 1 January 2008, or for individual engines with a production date on or after 1 January 2013.
5. For engines of a type or model for which the date of manufacture of the first individual production model is on or after 1 January 2014.

The regulations published by ICAO are given in the form of the total quantity of pollutants (D_p) emitted in the LTO cycle divided by the maximum sea level thrust (F_{oo}) and plotted against engine pressure ratio at maximum sea level thrust.

The limit values for NO_x are given by the formulae in Table 5.8.

Table 5.8 Current certification limits for NO_x for turbo jet and turbo fan engines.

	Engines first produced before 1.1.1996 & for engines manufactured before 1.1.2000	Engines first produced on or after 1.1.1996 & for engines manufactured on or after 1.1.2000	Engines for which the date of manufacture of the first individual production model was on or after 1 January 2004	Engines first produced on or after 1.1.2007 & for engines manufactured on or after 1.1.2013	Engines for which the date of manufacture of the first individual production model was on or after 1.1.2014
Applies to engines >26.7 kN Engines of pressure ratio less than 30 Thrust more than 89 kN	$D_p/F_{oo} = 40 + 2\pi_{oo}$	$D_p/F_{oo} = 32 + 1.6\pi_{oo}$			
Thrust between 26.7 kN and not more than 89 kN			$D_p/F_{oo} = 19 + 1.6\pi_{oo}$	$D_p/F_{oo} = 16.72 + 1.4080\pi_{oo}$	$7.88 + 1.4080\pi_{oo}$
Engines of pressure ratio more than 30 and less than 62.5 (104.7)					
Thrust more than 89 kN			$D_p/F_{oo} = 37.572 + 1.6\pi_{oo} - 0.208F_{oo}$	$D_p/F_{oo} = 38.54862 + (1.6823\pi_{oo}) - (0.2453F_{oo}) - (0.00308\pi_{oo}F_{oo})$	$D_p/F_{oo} = 40.052 + 1.5681\pi_{oo} - 0.3615F_{oo} - 0.0018\pi_{oo} \times F_{oo}$
Thrust between 26.7 kN and not more than 89 kN			$D_p/F_{oo} = 42.71 + 1.4286\pi_{oo} - 0.4013F_{oo} + 0.00642\pi_{oo}F_{oo}$	$D_p/F_{oo} = 46.1600 + (1.4286\pi_{oo}) - (0.5303F_{oo}) - (0.00642\pi_{oo}F_{oo})$	
Engines with pressure ratio 62.5 or more					
Engines with pressure ratio 82.6 or more			$D_p/F_{oo} = 32 + 1.6\pi_{oo}$	$D_p/F_{oo} = 32 + 1.6\pi_{oo}$	
Engines of pressure ratio more than 30 and less than (104.7)					
Thrust more than 89 kN					$D_p/F_{oo} = -9.88 + 2.0\pi_{oo}$
Thrust between 26.7 kN and not more than 89 kN					$D_p/F_{oo} = 41.9435 + 1.505\pi_{oo} - 0.5823F_{oo} + 0.005562\pi_{oo} \times F_{oo}$
Engines with pressure ratio 104.7 or more					$D_p/F_{oo} = 32 + 1.6\pi_{oo}$

Source: International Standards and Recommended Practices, Environmental Protection, ICAO Annex 16 Volume II 3rd edition July 2008, plus amendments: Amendment 7 (17 November 2011), Amendment 8 (July 2014), where:

D_p = the sum of emissions in the LTO cycle in g

F_{oo} = thrust at sea level take-off (100 %)

π_{oo} = pressure ratio at sea level take-off thrust point (100 %)

The equivalent limits for HC and CO are $D_p/F_{00} = 19.6$ for HC and $D_p/F_{00} = 118$ for CO (ICAO Annex 16 Vol. II paragraph 2.2.2). Smoke is limited to a regulatory smoke number = $83 (F_{00})^{-0.274}$ or a value of 50, whichever is the lower.

A further description of the technical definitions in relation to engine certification as well as actual engine exhaust emission measurement data can be found in the ICAO Engine Exhaust Emission Database. The latter database is accessible from “www.easa.europa.eu/domains/environment/icao-aircraft-engine-emissions-databank” hosted by the European Aviation Safety Agency (EASA).

On 8 February 2016, at the tenth meeting of the International Civil Aviation Organization (ICAO) Committee for Environmental Protection (CAEP) a performance standard was agreed for new aircraft that will mandate improvements in fuel efficiency and reductions in carbon dioxide (CO₂) emissions. The standards will on average require a 4% reduction in the cruise fuel consumption of new aircraft starting in 2028 compared to 2015 deliveries, with the actual reductions ranging from 0 to 11%, depending on the maximum takeoff mass (MTOM) of the aircraft (ICCT, 2017).

The CO₂ certification standards are contained in a new Volume III - CO₂ Certification Requirement - to Annex 16 of the Convention on civil aviation (ICAO, 2017).

Embedded applicability dates are:

- **Subsonic jet aeroplanes**, including their derived versions, of greater than 5,700 kg maximum take-off mass for which the application for a type certificate was submitted on or after 1 January 2020, except for those aeroplanes of less than or equal to 60,000 kg maximum take-off mass with a maximum passenger seating capacity of 19 seats or less;
- **Subsonic jet aeroplanes**, including their derived versions, of greater than 5,700 kg and less than or equal to 60,000 kg maximum take-off mass with a maximum passenger seating capacity of 19 seats or less, for which the application for a type certificate is submitted on or after 1 January 2023;
- **All propeller-driven aeroplanes**, including their derived versions, of greater than 8,618 kg maximum take-off mass, for which the application for a type certificate was submitted on or after 1 January 2020;
- **Derived versions of non-CO₂-certified subsonic jet aeroplanes** of greater than 5,700 kg maximum certificated take-off mass for which the application for certification of the change in type design is submitted on or after 1 January 2023;
- **Derived versions of non-CO₂ certified propeller-driven aeroplanes** of greater than 8,618 kg maximum certificated take-off mass for which the application for certification of the change in type design is submitted on or after 1 January 2023;
- **Individual non-CO₂-certified subsonic jet aeroplanes** of greater than 5,700 kg maximum certificated take-off mass for which a certificate of airworthiness is first issued on or after 1 January 2028; and
- **Individual non-CO₂-certified propeller-driven aeroplanes** of greater than 8,618 kg maximum certificated take-off mass for which a certificate of airworthiness is first issued on or after 1 January 2028.

Marpol 73/78 Annex VI agreed by IMO (International Maritime Organisation) concerns the control of NO_x emissions (Regulation 13 plus amendments) and SO_x and particulate emissions (Regulation 14 plus amendments) from ships (DNV, 2009). Recently the so called Energy Efficiency Design Index (EEDI) fuel efficiency regulations for new built ships was included in Chapter 4 of Annex VI in the Marpol convention for the purpose of controlling the CO₂ emissions from ships (Lloyd's Register, 2012).

The baseline NO_x emission regulation of Annex VI apply for diesel engines with a power output higher than 130 kW, which are installed on a ship constructed on or after 1 January 2000 and diesel engines with a power output higher than 130 kW which undergo major conversion on or after 1 January 2000.

The baseline NO_x emission limits for ship engines in relation to their rated engine speed (n) given in RPM (Revolutions Per Minute) are the following:

- 17 g per kWh, $n < 130$ RPM
- $45 \cdot n^{-0.2}$ g per kWh, $130 \leq n < 2000$ RPM
- 9.8 g per kWh, $n \geq 2000$ RPM

The further amendment of Annex VI Regulation 13 contains a three tiered approach in order to strengthen the emission standards for NO_x. The three tier approach comprises the following:

- Tier I: Diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2000 and prior to 1 January 2011 (initial regulation).
- Tier II: Diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2011.
- Tier III¹²: Diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2016 operating in the North American ECA (Emission Control Area) or the United States Caribbean Sea ECA and diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2021 operating in the Baltic Sea and North Sea ECA.

The three tier NO_x emission limit functions are shown in Table 5.9.

Table 5.9 Tier I-III NO_x emission limits for ship engines in MARPOL Annex VI.

	NO _x limit	RPM (n)
Tier I	17 g per kWh	$n < 130$
	$45 \cdot n^{-0.2}$ g per kWh	$130 \leq n < 2000$
	9.8 g per kWh	$n \geq 2000$
Tier II	14.4 g per kWh	$n < 130$
	$44 \cdot n^{-0.23}$ g per kWh	$130 \leq n < 2000$
	7.7 g per kWh	$n \geq 2000$
Tier III	3.4 g per kWh	$n < 130$
	$9 \cdot n^{-0.2}$ g per kWh	$130 \leq n < 2000$
	2 g per kWh	$n \geq 2000$

Further, the NO_x Tier I limits are to be applied for existing engines with a power output higher than 5000 kW and a displacement per cylinder at or

¹² For ships operating in a designated Emission Control Area. Outside a designated Emission Control Area, Tier II limits apply.

above 90 litres, installed on a ship constructed on or after 1 January 1990 but prior to 1 January 2000.

In relation to the sulphur content in heavy fuel and marine gas oil used by ship engines, Table 5.10 shows the EU and IMO (Regulation 14 plus amendments) legislation in force for SECA (Sulphur Emission Control Area) and outside SECAs.

Table 5.10 Current legislation in relation to marine fuel quality.

Legislation	Heavy fuel oil		Gas oil	
	S- %	Impl. date (day/month/year)	S- %	Implement. date (day/month/year)
EU Directive 93/12	None		0.2 ¹	01.10.1994
EU Directive 1999/32	None		0.2	01.01.2000
EU Directive 2005/33 ²	SECA - Baltic sea	1.5 11.08.2006	0.1	01.01.2008
	SECA - North sea	1.5 11.08.2007	0.1	01.01.2008
	Outside SECAs	None	0.1	01.01.2008
MARPOL Annex VI	SECA – Baltic sea	1.5 19.05.2006		
	SECA – North sea	1.5 21.11.2007		
	Outside SECA	4.5 19.05.2006		
MARPOL Annex VI amendments	SECAs	1 01.03.2010		
	SECAs	0.1 01.01.2015		
	Outside SECAs	3.5 01.01.2012		
	Outside SECAs	0.5 01.01.2020		

¹ Sulphur content limit for fuel sold inside EU.

² From 1.1.2010 fuel with a sulphur content higher than 0.1 % must not be used in EU ports for ships at berth exceeding two hours.

In Marpol 83/78 Annex VI (Chapter 4), the EEDI fuel efficiency regulations are mandatory from 1 January 2013 for new built ships larger than 400 GT.

EEDI is a design index value that expresses how much CO₂ is produced per work done (g CO₂ per tonnes.nm¹³). At present, the IMO EEDI scheme comprises the following ship types; bulk carriers, gas carriers, tankers, container ships, general cargo ships, refrigerated and combination cargo carriers.

The EEDI percentage reductions that need to be achieved for new built ships relative to existing ships, are shown in Table 5.11 stratified according to ship type and dead weight tonnes (DWT) in the temporal phases (new built year in brackets); 0 (2013-14), 1 (2015-19), 2 (2020-24) and 3 (2025+).

Table 5.11 EEDI percentage reductions for new built ships relative to existing ships.

Ship type	Size	Phase 0	Phase 1	Phase 2	Phase 3
		1-Jan-2013 to 31-Dec-2014	1-Jan-2015 to 31-Dec-2019	1-Jan-2020 to 31-Dec-2024	1-Jan-2025 onwards
Bulk carrier	20,000 DWT and above	0	10	20	30
	10,000 – 20,000 DWT	n/a	0-10*	0-20*	0-30*
Gas carrier	10,000 DWT and above	0	10	20	30
	2,000 – 10,000 DWT	n/a	0-10*	0-20*	0-30*
Tanker	20,000 DWT and above	0	10	20	30
	4,000 – 20,000 DWT	n/a	0-10*	0-20*	0-30*
Container ship	15,000 DWT and above	0	10	20	30
	10,000 – 15,000 DWT	n/a	0-10*	0-20*	0-30*
General cargo ship	15,000 DWT and above	0	10	15	30
	3,000 – 15,000 DWT	n/a	0-10*	0-15*	0-30*
Refrigerated cargo carrier	5,000 DWT and above	0	10	15	30
	3,000 – 5,000 DWT	n/a	0-10*	0-15*	0-30*
Combination carrier	20,000 DWT and above	0	10	20	30
	4,000 – 20,000 DWT	n/a	0-10*	0-20*	0-30*

¹³ nm: nautical mile.

It is envisaged that also ro-ro cargo, ro-ro passenger and cruise passenger ships will be included in the EEDI scheme in the near future.

For non-road machinery, the EU Directive 2003/17/EC gives a limit value of 10 ppm sulphur in diesel (from 2011).

5.3 Emission factors

The SO₂ emission factors are fuel related, and rely on the sulphur contents given in the relevant EU fuel directives or in the Danish legal announcements. However, for jet fuel the default factor from EMEP/EEA (2019) is used. For ferries operated by Mols Linjen fuel sulphur data from fuel suppliers are used from 2017 onwards, and for small ferries fuel sulphur data from fuel suppliers are used in all inventory years. Road transport diesel is assumed to be used by engines in military and railways, and road transport gasoline is assumed to be used by non-road working machinery and recreational craft. Hence, these types of machinery have the same SO₂ emission factors, as for road transport. Time series of fuel sulphur contents for the relevant fuel types and their references are listed in Annex 14.

Annex 14 also list the lower heating values (LHV) for the inventory fuel types together with their references. The LHV's are used to transform emission factors from g/kg fuel into g/MJ or fuel results from kg into MJ if needed in the inventories.

The CO₂ emission factors for other fuels than LNG, LPG and diesel are country-specific and come from Fenhann and Kilde (1994). For LNG, the CO₂ emission factor is estimated by the Danish gas transmission company, Energinet.dk, based on gas analysis data. For LPG, the emission factor source is EMEP/EEA (2019) and for diesel, the emission factor is taken from IPCC (2006).

The N₂O emission factors are taken from the EMEP/EEA guidebook; EMEP/EEA (2019) for road transport and non-road machinery, and IPCC (2006) for national sea transport and fisheries as well as aviation.

For all mobile sources, the emission factor source for NH₃, PAH and PCB is the EMEP/EEA guidebook (EMEP/EEA, 2019). For BC, the emission factor source is Comer et al. (2017) for sea transport and fisheries. The BC emission factors for the remaining inventory categories come from (EMEP/EEA, 2019). The heavy metal emission factors for road transport and other mobile sources originate from Winther and Slentø (2010). For national sea transport and fisheries, the heavy metal emission factor source is the EMEP/EEA guidebook (EMEP/EEA, 2019). For HCB the emission factors come from Nielsen et al. (2014). For civil aviation jet fuel, no heavy metal emission factors are proposed due to lack of data.

In the case of military ground equipment, due to lack of fleet/activity and emission data, aggregated emission factors for gasoline and diesel are derived from total road traffic emission results. For piston engine aircraft using aviation gasoline, emission factors from (EMEP/EEA, 2019) are used.

For railways, specific Danish measurements from the Danish State Railways (DSB) (Mølgård, 2021) are used to calculate the emission factors of NO_x, VOC, CO and TSP, and a NMVOC/CH₄ split is made based on expert judgment.

For agriculture, forestry, industry, household gardening and recreational craft, the NO_x, VOC, CO and TSP emission factors are derived from various European measurement programmes; see IFEU (2004, 2009), Notter and Schmied (2015) and Winther et al. (2006). The NMVOC/CH₄ split is taken from IFEU (2009).

For national sea transport and fisheries, the NO_x emission factors predominantly come from the engine manufacturer MAN Energy Solutions, as a function of engine production year. The CO and VOC emission factors come from the Danish TEMA2015 emission model (Ministry of Transport, 2015). TSP emission factors are provided by IMO (2015), whereas the PM₁₀ and PM_{2.5} size fractions are obtained from MAN Energy Solutions.

Specifically for the ferries used by Mols Linjen, NO_x, VOC and CO emission factors are provided by Kristensen (2008), originating from engine measurements (Hansen et al., 2004; Wismann, 1999; PHP, 1996). Complimentary emission factor data for new ferries is provided by Kristensen (2013) and engine load specific emission data is provided by Nielsen (2019). For the LNG fueled ferry in service on the Hou-Sælvig route NO_x, NMVOC, CO and TSP emission factors are taken from Bengtsson et al. (2011).

For marine engines using diesel or residual oil, VOC/CH₄ splits are taken from EMEP/EEA (2019), and all emission factors are shown in Annex 13.

The source for aviation (jet fuel) emission factors is the EMEP/EEA guidebook (EMEP/EEA, 2019). For a number of different representative aircraft types, the EMEP/EEA guidebook comprises fuel flow and NO_x, CO and VOC emission indices for the four LTO modes and distance based emission factors for cruise. For Auxiliary power units (APU), ICAO (2011) is the data source for APU load specific NO_x, CO and VOC emission factors for different APU aircraft groups to be linked with the different representative aircraft types. VOC/CH₄ splits for aviation are taken from EMEP/EEA (2019).

For all sectors, emission factors are given in CollectER format in Annex 15 for 2020. Table 5.12 shows the aggregated emission factors for CH₄, CO₂, N₂O, SO₂, NO_x, NMVOC, CO, NH₃, TSP and BC in CollectER format used to calculate the emissions from other mobile sources in Denmark.

Table 5.12 Fuel based emission factors for CO₂, CH₄, N₂O, SO₂, NO_x, NMVOC, CO, NH₃, TSP and BC for other mobile sources in Denmark (2020).

										Emission factors ¹ [g per GJ]					
SNAP ID	Category	Fuel type	Tier	CH ₄ % level of VOC	CH ₄	CO ₂	N ₂ O	SO ₂	NO _x	NM VOC	CO	NH ₃	TSP	BC	
080100		Military	Diesel	Tier 1	10.0	0.32	74.10	3.49	0.44	181.12	2.85	28.46	1.35	2.68	1.82
080100		Military	Gasoline	Tier 1	5.0	5.29	73.00	0.64	0.43	56.06	99.45	924.23	11.36	0.84	0.14
080100		Military	Jet fuel	Tier 1	9.6	2.65	72.00	2.30	22.99	250.57	24.94	229.89	0.00	1.16	0.56
080200		Railways	Diesel	Tier 1	3.7	1.06	74.10	2.24	0.47	551.55	27.49	70.10	0.20	7.01	4.56
080300		Recreational craft	Bio ethanol	Tier 3	2.8	11.56	0.00	1.61	0.00	540.76	404.84	7060.69	0.11	4.29	0.21
080300		Recreational craft	Diesel	Tier 3	2.4	2.44	74.10	2.97	46.84	588.07	99.20	339.27	0.17	54.65	20.22
080300		Recreational craft	Gasoline	Tier 3	2.8	11.56	73.00	1.61	0.46	540.76	404.84	7060.69	0.11	4.29	0.21
080402		National sea traffic	Diesel	Tier 3	3.0	1.81	74.10	1.87	29.53	1258.20	58.66	122.69	0.00	20.66	3.41
080402		National sea traffic	LNG	Tier 3	74.0	263.14	56.80	3.96	0.00	161.63	92.45	269.39	0.00	8.51	0.22
080402		National sea traffic	Residual oil	Tier 3	3.0	2.02	78.00	1.95	48.90	1901.59	65.33	199.20	0.00	91.37	4.81
080403		Fishing	Diesel	Tier 3	3.0	1.66	74.10	1.82	46.84	1172.66	53.64	157.56	0.00	20.42	4.52
080404		International sea traffic	Diesel	Tier 1	3.0	1.88	74.10	1.87	46.84	1578.36	60.71	178.58	0.00	23.63	2.36
080404		International sea traffic	Residual oil	Tier 1	3.0	2.07	78.00	1.96	48.90	2074.41	66.95	196.94	0.00	95.60	4.52
080501		Air traffic. Dom. < 3000 ft.	AvGas	Tier 1	2.0	8.62	73.00	2.00	22.83	71.70	422.10	18219.00	1.60	10.00	1.50
080501		Air traffic. Dom. < 3000 ft.	Jet fuel	Tier 3	10.0	1.76	72.00	10.32	22.99	281.53	15.84	194.36	0.00	1.81	0.80
080502		Air traffic. Int. < 3000 ft.	Jet fuel	Tier 3	10.0	2.52	72.00	5.09	22.99	292.34	22.71	208.60	0.00	2.89	1.49
080503		Air traffic. Dom. > 3000 ft.	Jet fuel	Tier 3	0.0	0.00	72.00	2.30	22.99	295.47	7.22	110.15	0.00	2.02	1.14
080504		Air traffic. Int. > 3000 ft.	Jet fuel	Tier 3	0.0	0.00	72.00	2.30	22.99	294.63	6.00	65.74	0.00	4.54	2.42
080600		Agriculture	Bio ethanol	Tier 3	10.3	112.83	0.00	1.55	0.00	95.94	987.14	24694.30	1.09	23.47	1.17
080600		Agriculture	Diesel	Tier 3	2.4	0.96	74.10	3.54	0.47	323.52	39.14	267.59	0.20	29.68	17.73
080600		Agriculture	Gasoline	Tier 3	10.3	112.83	73.00	1.55	0.46	95.94	987.14	24694.30	1.09	23.47	1.17
080700		Forestry	Bio ethanol	Tier 3	6.0	240.84	0.00	0.46	0.00	54.79	3754.36	17915.98	0.09	82.19	4.11
080700		Forestry	Diesel	Tier 3	2.4	0.36	74.10	3.72	0.47	62.51	14.58	174.73	0.21	3.83	2.50
080700		Forestry	Gasoline	Tier 3	6.0	240.84	73.00	0.46	0.46	54.79	3754.36	17915.98	0.09	82.19	4.11
080800		Industry	Bio ethanol	Tier 3	3.7	57.79	0.00	1.49	0.00	212.42	1523.19	14359.20	0.10	23.93	1.20
080800		Industry	Diesel	Tier 3	2.4	0.82	74.10	3.49	0.47	239.43	33.19	220.72	0.20	19.19	13.51
080800		Industry	Gasoline	Tier 3	3.7	57.79	73.00	1.49	0.46	212.42	1523.19	14359.20	0.10	23.93	1.20
080800		Industry	LPG	Tier 3	5.0	1.75	63.10	3.50	0.00	140.04	33.20	13.98	0.21	0.70	0.03
080900		Household and gardening	Bio ethanol	Tier 3	1.9	51.67	0.00	1.16	0.00	93.40	2626.68	28746.39	0.09	40.34	2.02
080900		Household and gardening	Gasoline	Tier 3	1.9	51.67	73.00	1.16	0.46	93.40	2626.68	28746.39	0.09	40.34	2.02
081100		Commercial and institutional	Bio ethanol	Tier 3	4.0	35.44	0.00	1.31	0.00	71.58	860.32	34083.88	0.09	15.08	0.75
081100		Commercial and institutional	Diesel	Tier 3	2.4	0.90	74.10	3.46	0.47	310.74	36.56	257.23	0.20	24.48	16.96
081100		Commercial and institutional	Gasoline	Tier 3	4.0	35.44	73.00	1.31	0.46	71.58	860.32	34083.88	0.09	15.08	0.75
081100		Commercial and institutional	LPG	Tier 3	5.0	1.75	63.10	3.50	0.00	140.14	33.20	13.98	0.21	0.70	0.03
080501		Air traffic. Dom. < 3000 ft.	AvGas	Tier 1	2.0	8.62	73.00	2.00	22.83	71.70	422.10	18219.00	1.60	10.00	1.50
080501		Air traffic. Dom. < 3000 ft.	Jet fuel	Tier 3	10.0	1.26	72.00	5.89	22.99	273.70	11.33	227.44	0.00	1.61	0.59
080502		Air traffic. Int. < 3000 ft.	Jet fuel	Tier 3	10.0	2.10	72.00	3.06	22.99	321.89	18.91	211.95	0.00	2.12	0.78
080503		Air traffic. Dom. > 3000 ft.	Jet fuel	Tier 3	0.0	0.00	72.00	2.30	22.99	327.01	3.12	58.40	0.00	2.63	0.82
080504		Air traffic. Int. > 3000 ft.	Jet fuel	Tier 3	0.0	0.00	72.00	2.30	22.99	359.20	3.18	43.14	0.00	3.64	1.49

References. CO₂: Country-specific, Energinet.dk (LNG), EMEP/EEA (LPG). N₂O: EMEP/EEA. CH₄: Railways: Danish State Railways, DCE; Agriculture/Forestry/Industry/Household-Gardening: IFEU (2004, 1999, 2014); National sea traffic/Fishing/International sea traffic: Ministry of Transport (2015), specific data from Mols Linjen, Bengtsson et al. (2011), EMEP/EEA; domestic and international aviation: EMEP/EEA. SO₂: Country-specific; Military: Aggregated emission factors for road transport; Railways (NO_x, CO, NMVOC and TSP): Danish State Railways; Agriculture, forestry, industry, household gardening and inland waterways (NO_x, CO, VOC and TSP): IFEU (2004, 1999, 2014); National sea transport/Fishing/International sea traffic: MAN ES (NO_x), Ministry of Transport (2015, CO, NMVOC), IMO (TSP), specific data from Mols Linjen (NO_x, CO, NMVOC, TSP) and LNG emission factors (NO_x, CO, NMVOC, TSP) from Bengtsson et al. (2011); Aviation (NO_x, CO, NMVOC, TSP): EMEP/EEA. ² kg/GJ for CO₂.

Factors for deterioration, transient loads and gasoline evaporation for non-road machinery

The emission effects of engine wear are taken into account for diesel and gasoline engines by using the so-called deterioration factors. For diesel engines alone, transient factors are used in the calculations, to account for the emission changes caused by varying engine loads. The evaporative emissions of NMVOC are estimated for gasoline fuelling and tank evaporation. The factors for deterioration, transient loads and gasoline evaporation are taken from IFEU (2004, 1999, 2014), and are shown in Annex 10. For more details regarding the use of these factors, please refer to paragraph 5.4.2 or Winther et al. (2006).

Engine load adjustment factors for marine engines

For marine engines, specific fuel consumption (sfc) and emission factors are found to vary with engine load, and hence engine load adjustment factors, LAF, are used in the fleet activity calculations for ferries and fishing vessels to account for these engine load changes. For sfc and NO_x, N₂O, CO, VOC and PM, engine load adjustment functions are provided by IMO (2015) based on Starcrest (2013). Only sfc is adjusted in the calculations, due to the actual engine load levels for ferries and fishing vessels in the Danish inventories. The load adjustment factors are shown in Annex 12.

For a few ferries operated by Mols Linjen actual engine loads and engine load specific emission data provided by Nielsen (2019) is used to calculate precise sfc and emission factors of NO_x, CO and VOC.

5.4 Calculation method

5.4.1 Air traffic

For aviation, the domestic and international estimates are made separately for landing and takeoff (LTOs < 3000 ft), and cruising (> 3000 ft).

By using the LTO mode specific fuel flow and emission indices from EMEP/EEA (2019), the fuel consumption and emission factors for the full LTO cycle are estimated for each of the representative aircraft types used in the Danish inventory.

The fuel consumption for one LTO cycle is calculated according to the following sum formula:

$$FC_{LTO}^a = \sum_{m=1}^5 t_m \cdot ff_{a,m} \quad (15)$$

Where FC = fuel consumption (kg), m = LTO mode (approach/landing, taxi in, taxi out, take off, climb out), t = times in mode (s), ff = fuel flow (kg per s), a = representative aircraft type.

The emissions for one LTO cycle are estimated as follows:

$$E_{LTO}^a = \sum_{m=1}^5 FC_{a,m} \cdot EI_{a,m} \quad (16)$$

Where EI = emission index (g per kg fuel). Due to lack of specific airport data for approach/descent, take off and climb out, standardised times-in-modes of 4, 0.7 and 2.2 minutes are used as defined by ICAO (ICAO, 1995). For taxi in and taxi out, specific times-in-modes data are provided by Eurocontrol for the airports present in the Danish inventory. The taxi times-in-modes data are shown in Annex 10 for the years 2001-2020.

The fuel consumption and emissions for aircraft auxiliary power units (APU's) are calculated with the same method used to estimate LTO fuel consumption and emissions for aircraft main engines (formulas 13 and 14). ICAO (2011) is the data source for APU load specific fuel flows (kg per s) and emission rates (g per kg fuel) for different APU aircraft groups (characterised by seating capacity and age). APU times-in-modes for arrival, start-up, boarding and main engine start are also provided by ICAO (2011), whereas push back time intervals are taken from an emission study made in Copenhagen Airport (Ellermann et al., 2011; Winther et al., 2015).

For each representative aircraft type, the calculated fuel consumption and emission factors per LTO are shown in Annex 10 for Copenhagen Airport and other airports (aggregated) for 2020. APU data for fuel flows, emission rates and times-in-modes are also shown in Annex 10, together with the correspondence table for APU group-representative aircraft type.

The calculations for cruise use the distance specific fuel consumption and emissions given by EMEP/EEA (2019) per representative aircraft type. Data interpolations or extrapolations are made – in each case determined by the actual flown distance between the origin and the destination airports.

The actual flown distance between two airports can be derived as a function of the ideal great circle distance (GCD) between the airports in question. The relation between actual distance and GCD flown is taken from the German TREMOD AV model (Knörr et al., 2012). For GCD ≤ 100 NM (≤ 185.2 km), 60 km must be added to the great circle distance (GCD) in order to find actual distance flown. For GCD > 100 NM (>185.2 km), 4 % additional flown distance is added for the part of GCD > 100 NM (>185.2 km):

- Actual flown distance (GCD ≤ 185.2 km) = GCD + 60 km
- Actual flown distance (GCD > 185.2 km) = (GCD – 185.2 km) x 1,04 + 185.2 km + 60 km

If the actual flown distance, y, is smaller than the maximum distance for which fuel consumption and emission data are given in the EMEP/EEA data bank the fuel consumption or emission E (y) becomes:

$$E(y) = E_{x_i} + \frac{(y - x_i)}{x_{i+1} - x_i} \cdot (E_{x_{i+1}} - E_{x_i}) \quad y < x_{\max}, i = 0, 1, 2, \dots, \max-1 \quad (17)$$

In (15) x_i and x_{\max} denominate the separate distances and the maximum distance, respectively, with known fuel consumption and emissions. If the actual flown distance, y, exceeds x_{\max} the maximum figures for fuel consumption and emissions must be extrapolated and the equation then becomes:

$$E(y) = E_{x_{\max}} + \frac{(y - x_{\max})}{x_{\max} - x_{\max-1}} \cdot (E_{x_{\max}} - E_{x_{\max-1}}) \quad y > x_{\max} \quad (18)$$

Total results are summed up and categorised according to each flight's destination airport code in order to distinguish between domestic and international flights.

Annex 10 shows the average fuel consumption and emission factors per representative aircraft type for cruise flying, as well as total distance flown, for 2020¹⁴. The factors are split between Copenhagen Airport and other airports and distinguish between domestic and international flights.

Specifically for flights between Denmark and Greenland or the Faroe Islands, for each representative aircraft type, the flight distances are directly shown in Annex 10, which go into the cruise calculation expressions 17 and 18.

The overall fuel precision (fuel balance) in the model is 1.04 in 2020, derived as the fuel ratio between model estimates and statistical sales. The fuel difference is accounted for by adjusting cruising fuel consumption and emissions in the model according to domestic and international cruising fuel shares.

For inventory years before 2001, the calculation procedure is to estimate each year's fuel consumption and emissions for LTO based on LTO/aircraft type statistics from Copenhagen Airport, and total take off numbers for other airports provided by the Danish Transport and Construction Agency. Due to lack of aircraft type specific LTO data, fuel consumption and emission factors derived for domestic LTO's in Copenhagen Airport is used for all LTO's in other airports. In a next step, the total fuel consumption for cruise (true cruise fuel consumption) is found year by year as the statistical fuel consumption total minus the calculated fuel consumption for LTO.

For each inventory year, intermediate cruise fuel consumption figures split into four parts (Copenhagen/Other airports; domestic/international) are found as proportional values between part specific LTO fuel consumption values estimated as described previously, and part specific cruise: LTO fuel consumption ratios for 2001 derived from the detailed city-pair emission inventory.

Each inventory year's true cruise fuel consumption is finally split into four parts by using the intermediate cruise fuel consumption values as a distribution key. As emission factor input data for cruise, aggregated fuel related emission factors for 2001 are derived from the detailed city-pair emission inventory.

5.4.2 Non-road working machinery and recreational craft

Prior to adjustments for deterioration effects and transient engine operations, the fuel consumption and emissions in year X, for a given machinery type, engine size and engine age, are calculated as:

$$E_{Basis}(X)_{i,j,k} = N_{i,j,k} \cdot HRS_{i,j,k} \cdot P \cdot LF_i \cdot EF_{y,z} \quad (19)$$

¹⁴ Excluding flights for Greenland and the Faroe Islands.

where E_{Basis} = fuel consumption/emissions in the basic situation, N = number of engines, HRS = annual working hours, P = average rated engine size in kW, LF = load factor, EF = fuel consumption/emission factor in g per kWh, i = machinery type, j = engine size, k = engine age, y = engine-size class and z = emission level. The basic fuel consumption and emission factors are shown in Annex 11.

The deterioration factor for a given machinery type, engine size and engine age in year X depends on the engine-size class (only for gasoline), y , and the emission level, z . The deterioration factors for diesel and gasoline 2-stroke engines are found from:

$$DF_{i,j,k}(X) = \frac{K_{i,j,k}}{LT_i} \cdot DF_{y,z} \quad (20)$$

where DF = deterioration factor, K = engine age, LT = lifetime, i = machinery type, j = engine size, k = engine age, y = engine-size class and z = emission level.

For gasoline 4-stroke engines the deterioration factors are calculated as:

$$DF_{i,j,k}(X) = \sqrt{\frac{K_{i,j,k}}{LT_i}} \cdot DF_{y,z} \quad (21)$$

The deterioration factors inserted in (20) and (21) are shown in Annex 11. No deterioration is assumed for fuel consumption (all fuel types) or for LPG engine emissions and, hence, $DF = 1$ in these situations.

The transient factor for any given machinery type, engine size and engine age in year X , relies only on emission level and load factor, and is denominated as:

$$TF_{i,j,k}(X) = TF_z \quad (22)$$

Where i = machinery type, j = engine size, k = engine age and z = emission level.

The transient factors inserted in (22) are shown in Annex 11. No transient corrections are made for gasoline and LPG engines and, hence, $TF_z = 1$ for these fuel types.

The final calculation of fuel consumption and emissions in year X for a given machinery type, engine size and engine age, is the product of the expressions 19-22:

$$E(X)_{i,j,k} = E_{\text{Basis}}(X)_{i,j,k} \cdot TF(X)_{i,j,k} \cdot (1 + DF(X)_{i,j,k}) \quad (23)$$

The evaporative hydrocarbon emissions from fuelling are calculated as:

$$E_{\text{Evap}, \text{fueling}, i} = FC_i \cdot EF_{\text{Evap}, \text{fueling}} \quad (24)$$

Where $E_{\text{Evap}, \text{fueling}, i}$ = hydrocarbon emissions from fuelling, i = machinery type, FC = fuel consumption in kg, $EF_{\text{Evap}, \text{fueling}}$ = emission factor in g NMVOC per kg fuel.

For tank evaporation, the hydrocarbon emissions are found from:

$$E_{Evap, \tan k, i} = N_i \cdot EF_{Evap, \tan k, i} \quad (25)$$

Where $E_{Evap, \tan k, i}$ = hydrocarbon emissions from tank evaporation, N = number of engines, i = machinery type and $EF_{Evap, fuelling}$ = emission factor in g NMVOC per year.

5.4.3 Ferries, other national sea transport, fisheries and international sea transport

The fuel consumption and emissions in year X , for ferries are calculated as:

$$E(X) = \sum_i N_i \cdot T_i \cdot S_{i,j} \cdot P_i \cdot LF_j \cdot LAF_j \cdot EF_{k,l,y} \quad (26)$$

Where E = fuel consumption/emissions, N = number of round trips, T = sailing time per round trip in hours, S = ferry share of ferry service round trips, P = engine size in kW, LF = engine load factor, LAF = engine load adjustment factor, EF = fuel consumption/emission factor in g per kWh, i = ferry service, j = ferry, k = fuel type, l = engine type, y = engine year.

For the remaining navigation categories, the emissions are calculated using a simplified approach:

$$E(X) = \sum_i EC_{i,k} EF_{k,l,y} \quad (27)$$

Where E = fuel consumption/emissions, EC = energy consumption, EF = fuel consumption/emission factor in g per kg fuel, i = category (other national sea, fishery, international sea), k = fuel type, l = engine type, y = average engine year.

The emission factor inserted in (27) is found as an average of the emission factors representing the engine ages which are comprised by the average lifetime in a given calculation year, X :

$$EF_{k,l,y} = \frac{\sum_{year=X-LT}^{year=X} EF_{k,l}}{LT_{k,l}} \quad (28)$$

For fishing vessels, the fuel consumption and emissions in year X , are calculated as:

$$E(X) = \sum_i T_i \cdot P_j \cdot LF_j \cdot LAF_j \cdot EF_{k,l,y} \quad (29)$$

Where E = fuel consumption/emissions, T = sailing time per fishing trip in hours, P = engine size in kW, LF = engine load factor, LAF = engine load adjustment factor, EF = fuel consumption/emission factor in g per kWh, i = fishing trip no., j = fishing vessel registration no., k = fuel type, l = engine type, y = engine year.

For the remaining navigation categories, the emissions are calculated using a simplified approach:

$$E(X) = \sum_i EC_{i,k} EF_{k,l,y} \quad (30)$$

Where E = fuel consumption/emissions, EC = energy consumption, EF = fuel consumption/emission factor in g per kg fuel, i = category (other national sea, international sea), k = fuel type, l = engine type, y = average engine year.

The emission factor inserted in (30) is found as an average of the emission factors representing the engine ages which are comprised by the average life-time in a given calculation year, X:

$$EF_{k,l,y} = \frac{\sum_{year=X-LT}^{year=X} EF_{k,l}}{LT_{k,l}} \quad (31)$$

5.5 Energy balance between DEA statistics and inventory estimates

Following convention rules, the DEA statistical fuel sales figures are the basis for the full Danish inventory. However, in some cases for mobile sources the DEA statistical sectors do not fully match the inventory sectors.

In the following, the transferal of fuel consumption data from DEA statistics into inventory relevant categories is explained for national sea transport and fisheries, non-road machinery and recreational craft, and road transport. A full list of all fuel consumption data, DEA figures as well as intermediate fuel consumption data, and final inventory input figures is shown in Annex 14.

5.5.1 National sea transport and fisheries

Fuel used for the remaining part of the traffic between two Danish ports, other national sea transport, is taken as the difference between 1) DEA national fuel sales for national sea transport minus fuel consumption at Danish off shore installations (off shore reduced fuel sales¹⁵) and 2) the bottom-up calculated fuel consumption for Danish ferries.

For years when the fuel estimates for ferries (not including the ferry to the Faroe Islands) are higher than the “off shore reduced” fuel sold for national sea transport, fuel is taken from fisheries in the case of marine diesel (1985-1999). For heavy fuel oil, the missing fuel amount is taken from stationary sources (1985-1986, 1988, 1994-1996) and international sea transport (2015 onwards).

For fisheries, the calculation methodology is activity based with a fuel balance, and input fuel data is in principle the diesel fuel sold for fisheries reported by DEA.

For years when diesel fuel calculated for national sea transport are higher than the “Off shore reduced” fuel sold for national sea transport, diesel is transferred from fisheries to national sea transport in the inventories.

¹⁵ According to the Danish Energy Authority, the diesel fuel sold for off shore installations are reported as sold for national navigation by the fuel sales reporting oil companies.

In addition, the bottom up diesel estimate for recreational craft is subtracted from fisheries and grouped in the “Other” inventory category together with military activities. Incorrectly reported gasoline and heavy fuel oil for fisheries is transferred to recreational craft (reported under “Other”) and national sea transport, respectively.

According to the DEA, in some cases inaccurate costumer specifications are made by the oil suppliers, which result in sector misallocation in the sales statistics between national sea transport and fisheries for diesel oil and between national sea transport and industry for heavy fuel oil (Peter Dal, DEA, personal communication, 2007). Further, fuel sold for vessels sailing between Denmark and Greenland/Faroe Islands are reported as international in the DEA statistics, and this fuel categorisation is different from the IPCC guideline definitions (see following paragraph 5.5.4).

Inaccurate fuel sale specifications is also the reason for heavy fuel oil being reported for fisheries in the DEA statistics. No engines installed in fishing vessels use heavy fuel oil, even though a certain amount of heavy fuel oil is listed in the DEA numbers for some statistical years (H. Amdissen, Danish Fishermen's Association, personal communication, 2006).

5.5.2 Non road machinery and recreational craft

For diesel and LPG, the non-road fuel consumption estimated by DCE is partly covered by the fuel consumption amounts in the following DEA sectors: agriculture and forestry, market gardening, and building and construction. The remaining quantity of non-road diesel and LPG is taken from the DEA industry sector.

For gasoline, the DEA residential sector, together with the DEA sectors mentioned for diesel and LPG, contribute to the non-road fuel consumption total. In addition, a certain amount of fuel is transferred from DEA road transport in order to outbalance the bottom up fuel consumption calculated in the DCE model.

The amount of diesel and LPG in DEA industry not being used by non-road machinery is included in the sectors, “Combustion in manufacturing industry” (0301) and “Non-industrial combustion plants” (0203) in the Danish emission inventory.

For recreational craft, the calculated fuel consumption totals for diesel and gasoline in the DCE model are subsequently subtracted from the DEA fishery sector. For gasoline, the DEA reported fuel consumption for fisheries is far too small to outbalance the bottom up fuel consumption for recreational craft, and hence the missing fuel amount is taken from the DEA road transport sector in order to fill the fuel gap.

5.5.3 Road transport

For LPG, the difference between fuel reported in DEA statistics and bottom-up estimates for road transport is outbalanced with fuel totals from “non-industrial combustion plants” (020200) in order to obtain a fuel balance.

5.5.4 Distinction between domestic and international aviation and navigation for Denmark

The distinction between domestic and international fuel consumption and emissions from aviation and navigation for Denmark should be in accordance with the 2006 IPCC Guidelines for National Greenhouse Gas Inventories. For the national emission inventory, this, in principle, means that fuel sold (and associated emissions) for flights/sea transportation starting from a sea-port/airport in the Kingdom of Denmark, with destinations inside or outside the Kingdom of Denmark, are regarded as domestic or international, respectively.

Aviation

As prescribed by the IPCC guidelines, for aviation, the fuel consumption and emissions associated with flights inside the Kingdom of Denmark are counted as domestic.

This report includes flights from airports in Denmark and associated jet fuel sales. Hence, the flights between airports in Denmark and flights from Denmark to Greenland and the Faroe Islands are classified as domestic and flights from Danish airports with destinations outside the Kingdom of Denmark are classified as international flights.

In Greenland and in the Faroe Islands, the jet fuel sold is treated as domestic. This decision becomes reasonable when considering that almost no fuel is bunkered in Greenland/the Faroe Islands by flights other than those going to Denmark.

Navigation

In DEA statistics, the domestic fuel total consists of fuel sold to Danish ferries and other ships sailing between two Danish ports. The DEA international fuel total consists of the fuel sold in Denmark to international ferries, international warships, other ships with foreign destinations, transport to Greenland and the Faroe Islands and, tank vessels.

In order to follow the IPCC guidelines the bottom-up fuel estimates for the ferry routes between Denmark and the Faroe Islands, and fuel sold in Denmark to vessels engaged in freight transportation between Denmark and Greenland/Faroe Islands are being subtracted from the fuel sales figures for international sea transport prior to inventory fuel input.

In Greenland, all marine fuel sales are treated as domestic. In the Faroe Islands, fuel sold in Faroese ports for Faroese fishing vessels and other Faroese ships is treated as domestic. The fuel sold to Faroese ships bunkering outside Faroese waters and the fuel sold to foreign ships in Faroese ports or outside Faroese waters is classified as international (Lastein and Winther, 2003).

Conclusively, the domestic/international fuel split (and associated emissions) for navigation is not determined with the same precision as for aviation. It is considered, however, that the potential of incorrectly allocated fuel quantities is only a small part of the total fuel sold for navigational purposes in the Kingdom of Denmark.

6 Fuel consumption and emissions

6.1 Fuel consumption

Table 6.1 shows the fuel consumption for domestic transport based on DEA statistics for 2020 and grouped according to the CRF/NFR classification codes shown in Table 3.1. For civil aviation the fuel consumption totals in Table 6.1 are summarized in two groups according to the CRF format; domestic aviation (domestic LTO + domestic cruise) and international aviation (international LTO + international cruise), as noted in Chapter 3.

The fuel consumption figures in time series 1985-2020 are given in Annex 16 in both CRF and NFR formats. For civil aviation the NFR format consist of four groups; domestic and international LTO and domestic and international cruise. Fuel results are also shown for 2020 in Annex 15 (CollectER format).

Road transport has a major share of the fuel consumption for domestic transport. In 2020, this sector's fuel consumption share is 81 %, while the fuel consumption shares for Off road agriculture/forestry, Manufacturing industries (mobile) and National navigation are 6 %, 4 % and 3 %, respectively. For the remaining sectors, the total fuel consumption share is 6 %.

Table 6.1 Fuel consumption (PJ) for domestic transport in 2020 in CRF sectors.

CRF ID	Fuel consumption (PJ)
Manufacturing industries/Construction (mobile)	7.4
Civil aviation (Domestic)*	1.1
Road transport: Passenger cars	87.0
Road transport: Light duty vehicles	21.3
Road transport: Heavy duty vehicles	51.8
Road transport: Mopeds & motorcycles	1.0
Railways	2.7
National navigation (Shipping)	6.4
Commercial/Institutional: Mobile	2.8
Residential: Household and gardening (mobile)	0.3
Agriculture/Forestry/Fishing: Off-road agriculture/forestry	11.6
Agriculture/Forestry/Fishing: National fishing	3.6
Other. Mobile	3.3
Road transport total	161.2
Other mobile total	39.1
Domestic total	200.3
Civil aviation (International)*	13.6
Navigation (international)	21.5

*Grouped according to UNFCCC reporting definitions

From 1985 to 2020, diesel (sum of diesel and biodiesel) and gasoline (sum of neat gasoline and bio ethanol) fuel consumption has changed by 66 % and - 19 %, respectively (Figure 6.1), and in 2020 the fuel consumption shares for diesel and gasoline were 71 % and 27 %, respectively (not shown). Other fuels only have a 2 % share of the domestic transport total (Figure 6.2). Almost all gasoline is used in road transportation vehicles. Gardening machinery and recreational craft are merely small consumers. Regarding diesel, there is considerable fuel consumption in most of the domestic transport categories,

whereas a more limited use of residual oil and jet fuel is being used in the navigation sector and by aviation (civil and military flights), respectively¹⁶.

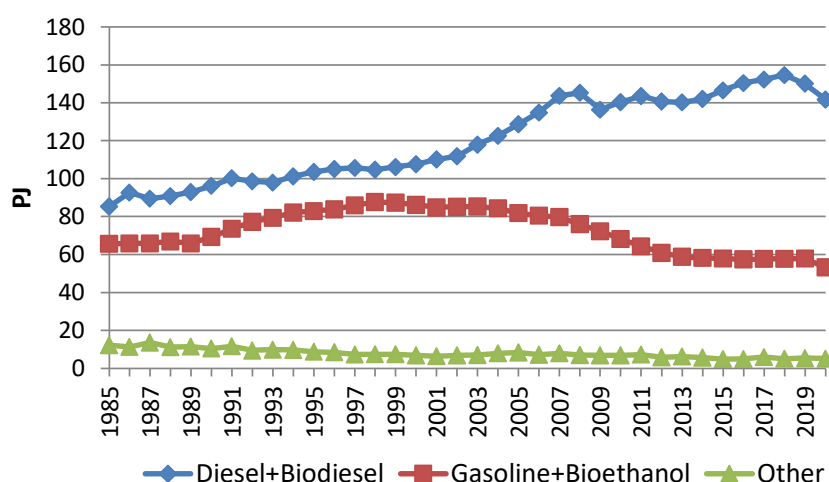


Figure 6.1 Fuel consumption per fuel type for domestic transport 1985-2020.

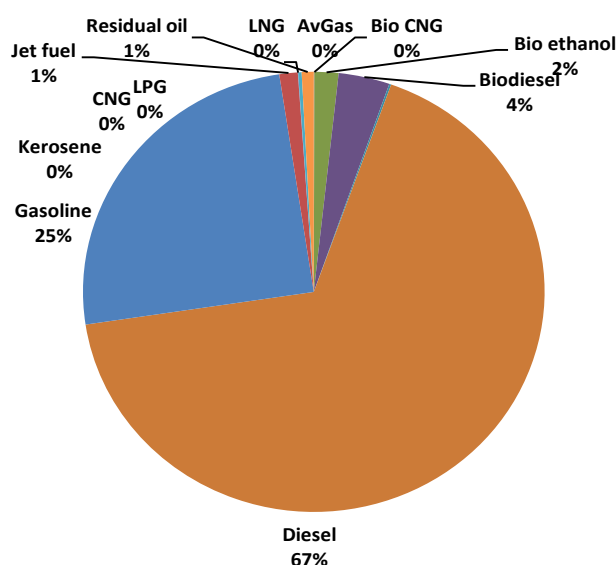


Figure 6.2 Fuel consumption share per fuel type for domestic transport in 2020.

6.1.1 Road transport

As shown in Figure 6.3, the fuel consumption for road transport¹⁷ has generally increased until 2007, except from a small fuel consumption decline noted in 2000. Reduced traffic causes significant fuel consumption declines in 2008-2009 during the global financial crisis, and in 2020 during the periods with COVID-19 lock down and social restrictions in the Danish society. The fuel consumption development is due to a decreasing trend in the use of gasoline fuels from 1999 to 2013 combined with a steady growth in the use of diesel until 2007, and from 2014 to 2018. Within sub-sectors, passenger cars represent the most fuel-consuming vehicle category, followed by heavy-duty vehicles, light duty vehicles and 2-wheelers, in decreasing order (Figure 6.4). The

¹⁶ Biofuels are sold at gas filling stations and are assumed to be used by road transport vehicles.

¹⁷ The sum share of bioethanol and biodiesel in the gasoline and diesel fuel blends for road transport is 5.4 %, in 2020.

largest fuel consumption impact related to COVID-19 is noted for passenger cars.

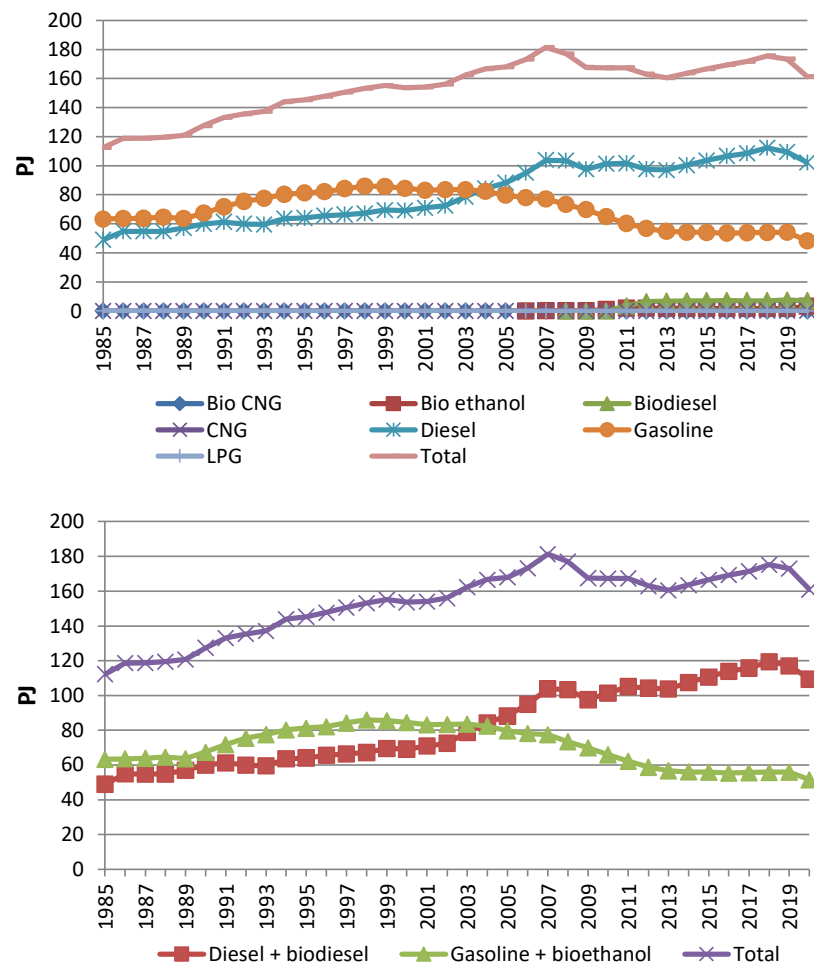


Figure 6.3 Fuel consumption per fuel type and as totals for road transport 1985-2020.

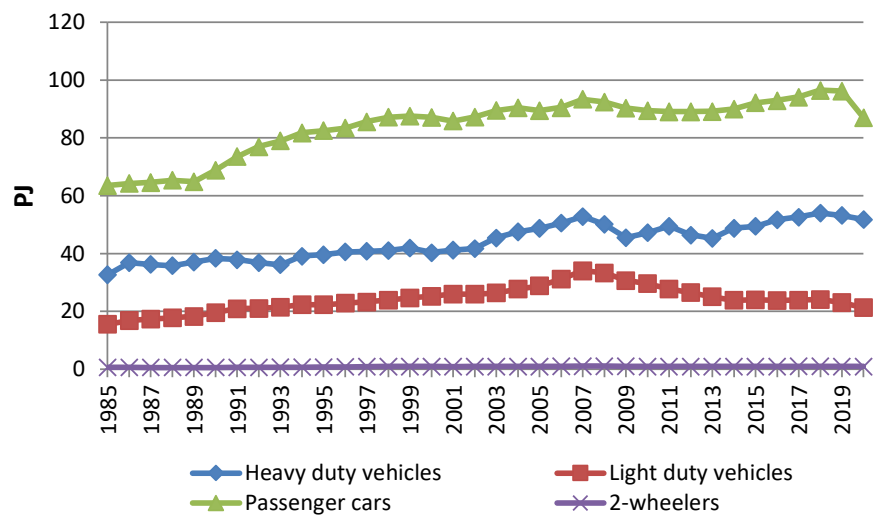


Figure 6.4 Total fuel consumption per vehicle type for road transport 1985-2020.

As shown in Figure 6.5 fuel consumption for gasoline passenger cars dominates the overall gasoline consumption trend. The development in diesel fuel consumption in recent years (Figure 6.6) is characterized by increasing fuel consumption for diesel passenger cars until 2018, while declines in the fuel consumption for trucks and buses (heavy-duty vehicles) are noted for 2008-

2009, 2012-2013 and 2019-2020, and fuel consumption reductions for light duty vehicles are noted for 2008-2014 and 2019-2020.

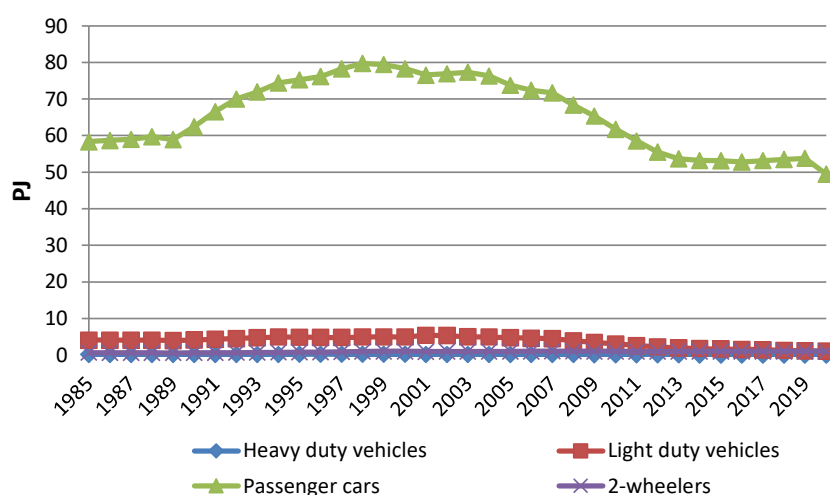


Figure 6.5 Gasoline fuel consumption per vehicle type for road transport 1985-2020.

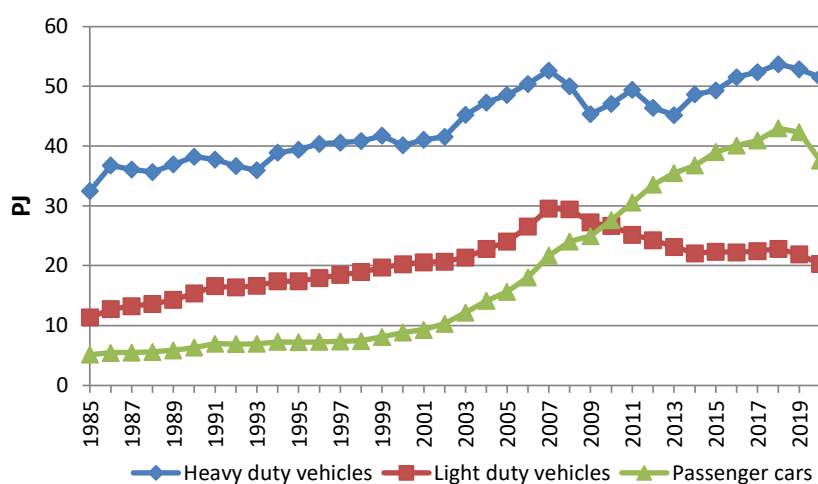


Figure 6.6 Diesel fuel consumption per vehicle type for road transport 1985-2020.

In 2020, fuel consumption shares for gasoline passenger cars, diesel heavy-duty vehicles, diesel passenger cars and diesel light duty vehicles were 31, 32, 23 and 12 %, respectively (Figure 6.7).

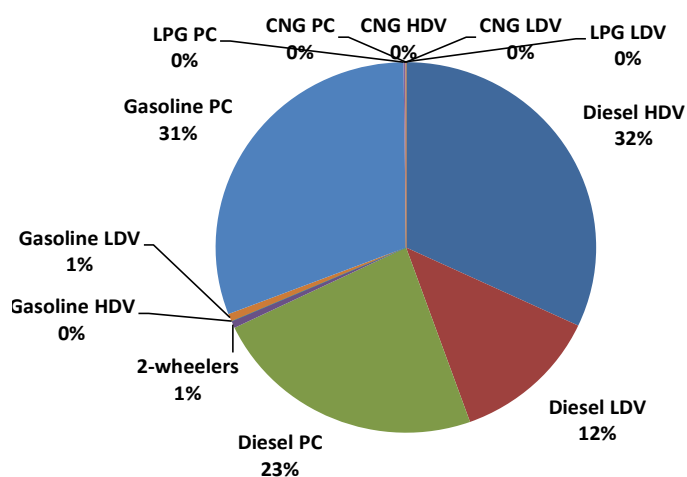


Figure 6.7 Fuel consumption share (PJ) per vehicle type for road transport in 2020.

6.1.2 Other mobile sources

It must be noted that the fuel consumption figures behind the Danish inventory for mobile equipment in the agriculture, forestry, industry, household and gardening (residential), and inland waterways (part of navigation) sectors, are less certain than for other mobile sectors. For these types of machinery, the DEA statistical figures do not directly provide fuel consumption information, and fuel consumption totals are subsequently estimated from activity data and fuel consumption factors. For recreational craft, the latest historical year is 2004.

As seen in Figure 6.8, classified according to CRF the most important sectors are Agriculture/Forestry/Fisheries (1A4c), Industry-other (mobile machinery part of 1A2g) and Navigation (1A3d). Minor fuel consuming sectors are Civil Aviation (1A3a), Railways (1A3c), Other (military mobile and recreational craft: 1A5b), Commercial/institutional (1A4a) and Residential (1A4b).

The 1985-2020 time series are shown per fuel type in Figures 6.9-6.12 for diesel, gasoline, residual oil and jet fuel, respectively.

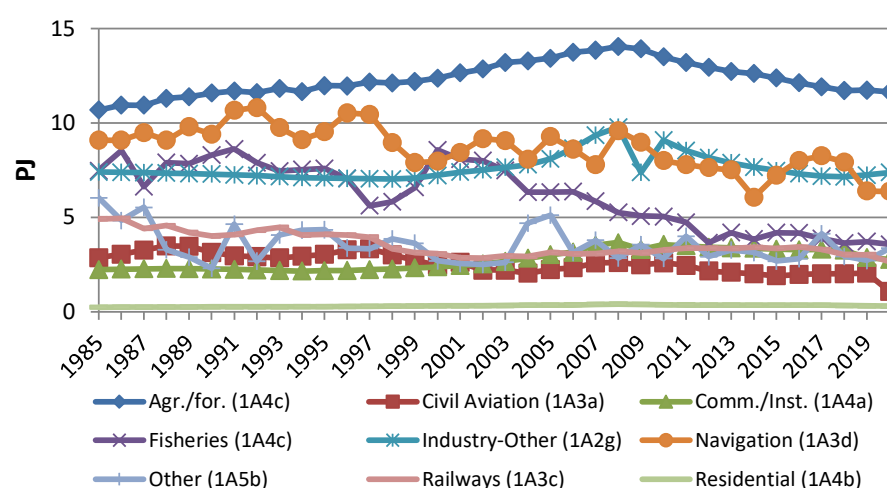


Figure 6.8 Total fuel consumption in CRF sectors for other mobile sources 1985-2020.

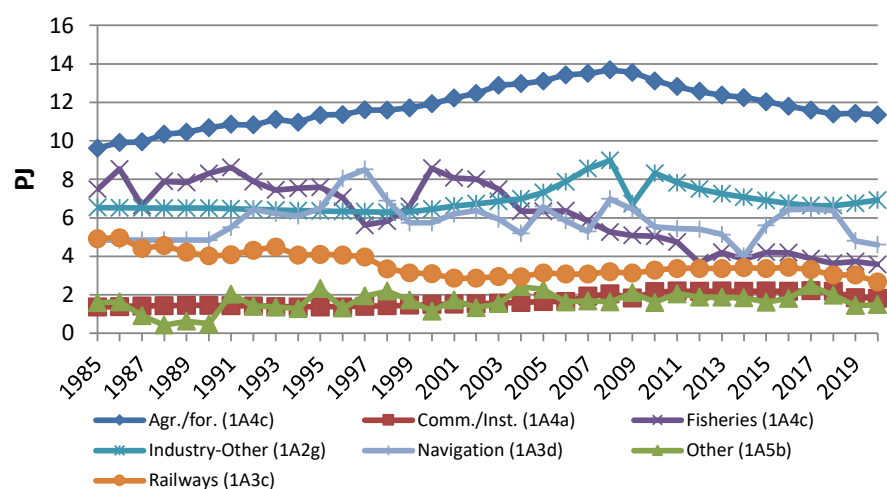


Figure 6.9 Diesel fuel consumption in CRF sectors for other mobile sources 1985-2020.

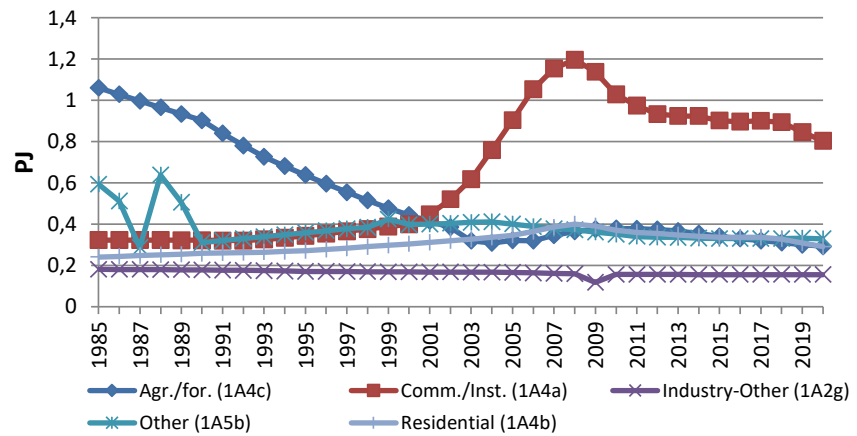


Figure 6.10 Gasoline fuel consumption in CRF sectors for other mobile source 1985-2020.

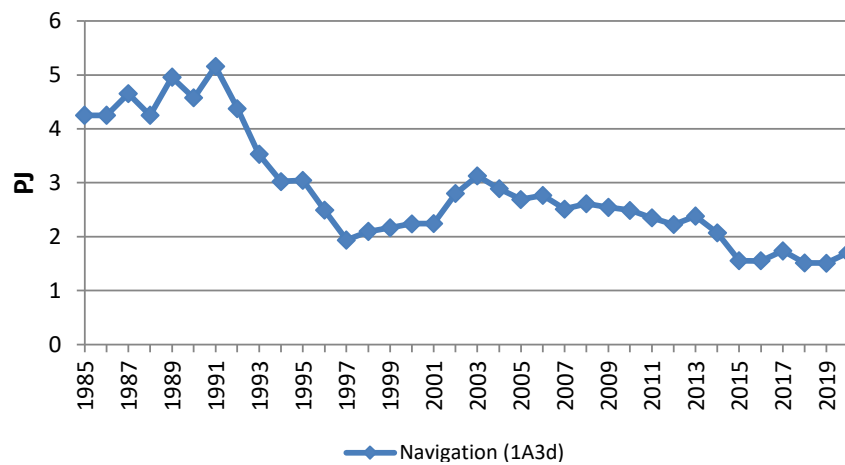


Figure 6.11 Residual oil fuel consumption in CRF sectors for other mobile sources 1985-2020.

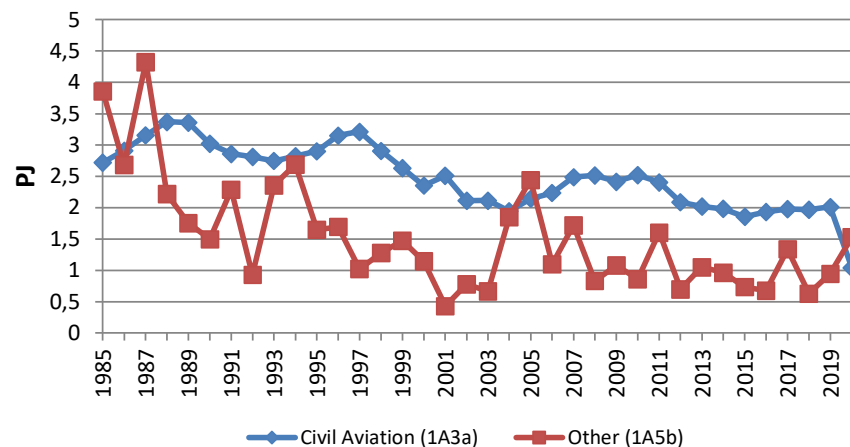


Figure 6.12 Jet fuel consumption in CRF sectors for other mobile sources 1985-2020.

For diesel, although the number of tractors and harvesters decrease in the entire period 1985-2020, the contemporary increase in the engine sizes of new sold machines makes the total fuel consumption for agriculture/forestry grow until 2008. The turnover of old less fuel efficient machinery and the decline in the number of tractors and harvesters explain the total fuel consumption decrease from 2008 onwards. The fuel consumption for industry has increased from the beginning of the 1990s, due to an increase in the activities for

construction machinery. The fuel consumption increase has been very pronounced in 2005-2008, for 2009; however, the global financial crisis has a significant impact on the building and construction activities. The fuel efficiency improvements for new sold vehicles is the main reason for total fuel consumption decline from 2010-2018. For fisheries, the development in fuel consumption reflects the activities in this sector.

The Navigation sector comprises national sea transport (fuel consumption between two Danish ports including sea travel directly between Denmark and Greenland/Faroe Islands). For national sea transport, the diesel fuel consumption curve reflects the combination of traffic and ferries in use for regional ferries. In 1998 and 1999, a significant decline in fuel consumption is apparent. The most important explanation here is the closing of ferry service routes in connection with the opening of the Great Belt Bridge in 1997. For railways, the gradual shift towards electrification explains the lowering trend in diesel fuel consumption and the emissions for this transport sector. The fuel consumed (and associated emissions) to produce electricity is accounted for in the stationary combustion part of the Danish inventories.

The largest gasoline fuel consumption is calculated for the Commercial/Institutional (1A4a) sector related to the use of household and gardening machinery. For these types of machinery, a somewhat smaller gasoline fuel consumption is calculated for the Residential (1A4b) sector. For household and gardening equipment, especially from 2001-2006, a significant fuel consumption increase is apparent due to considerable growth in the machinery stock. The gasoline fuel consumption development for Agriculture/Forestry/Fisheries (1A4c) is due to the gradual phasing out of gasoline-fuelled agricultural tractors until 2005 and the gradual increase in new sales of ATV's from the mid 2000s until 2011, followed by a decrease in new sales of ATV's from 2011 forward.

In terms of residual oil there has been a substantial decrease in the fuel consumption for regional ferries. The fuel consumption decline is most significant from 1991-1994 and from 1995-1997.

The considerable variations from one year to another in military jet fuel consumption are due to planning and budgetary reasons, and the passing demand for flying activities. Consequently, for some years, a certain amount of jet fuel stock-building might disturb the real picture of aircraft fuel consumption. Civil aviation has decreased until 2004, since the opening of the Great Belt Bridge in 1997, both in terms of number of flights and total jet fuel consumption. From 2011 to 2012, the total consumption of jet fuel decreased significantly due to a drop in the number of domestic flights, and in 2020 a huge decline in jet fuel consumption is noted due to the impact of COVID-19 on flight travel demand.

6.1.3 Fuel consumption for international transport

The residual oil and diesel oil fuel consumption fluctuations reflect the quantity of fuel sold in Denmark to international ferries, international warships, other ships with foreign destinations, transport to Greenland and the Faroe Islands, tank vessels and foreign fishing boats. For jet petrol, the sudden fuel consumption drop in 2002 is explained by the recession in the aviation sector due to the events of September 11, 2001 and structural changes in the aviation business. In 2009, the impact of the global financial crisis on flying activities

becomes very visible, and in 2020, a huge decline in jet fuel consumption is noted due to the impact of COVID-19 on flight travel demand.

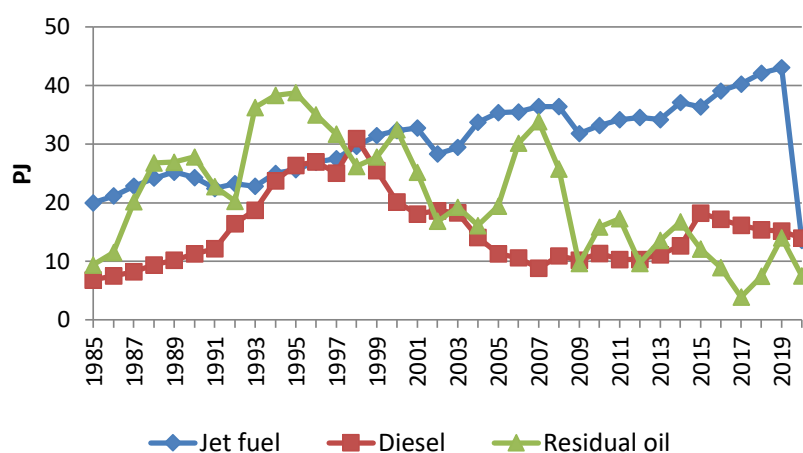


Figure 6.13 Bunker fuel consumption 1985-2020.

6.2 Emissions of CO₂, CH₄ and N₂O

In Table 6.2, the CO₂, CH₄ and N₂O emissions for road transport and other mobile sources are shown for 2020 in CRF sectors. The emission figures in time series 1990-2020 are given in Annex 16 (CRF format) and are shown for 1990 and 2020 in Annex 15 (CollectER format).

From 1990 to 2020, the road transport emissions of CO₂ and N₂O have increased by 19 and 42 %, respectively, whereas the emissions of CH₄ have decreased by 90 % (from Figures 6.14 - 6.16). From 1990 to 2020, the other mobile CO₂ emissions have decreased by 20, 64 and 5 %, respectively (from Figures 6.18 - 6.20)¹⁸.

¹⁸ From 1985 to 2020, the road transport emissions of CO₂ and N₂O have increased by 35 and 59 %, respectively, whereas the emissions of CH₄ have decreased by 89 %. From 1985 to 2020, the other mobile CO₂, CH₄ and N₂O emissions have decreased by 23, 66 and 7 %.

Table 6.2 Emissions of CO₂, CH₄ and N₂O in 2020 for road transport and other mobile sources.

	CO ₂ ktonnes	CH ₄ tonnes	N ₂ O tonnes
Manufacturing industries/Construction (mobile)	542	15	25
Civil aviation (Domestic)	78	1	4
Road transport: Passenger cars	5996	197	134
Road transport: Light duty vehicles	1482	6	43
Road transport: Heavy duty vehicles	3594	41	238
Road transport: Mopeds & motorcycles	69	72	1
Railways	197	3	6
National navigation (Shipping)	478	32	12
Commercial/Institutional: Mobile	199	30	8
Residential: Household and gardening (mobile)	20	15	0
Agriculture/Forestry/Fishing: Off-road agriculture/forestry	861	52	41
Agriculture/Forestry/Fishing: National fishing	264	6	6
Other, Mobile	243	10	9
Road transport exhaust total	11140	316	416
Road transport non exhaust total	0	0	0
Other mobile sources total	2882	165	112
Domestic total	14022	481	527
Civil aviation (International)	976	4	33
Navigation (International)	1621	42	41

6.2.1 Road transport

CO₂ emissions are directly fuel consumption dependent and, in this way, the development in the emission reflects the trend in fuel consumption. As shown in Figure 6.14, the most important emission source for road transport is passenger cars, followed by heavy-duty vehicles, light-duty vehicles and 2-wheelers in decreasing order. In 2020, the respective emission shares were 54, 32, 13 and 1 %, respectively (Figure 6.17).

The majority of CH₄ emissions from road transport come from gasoline passenger cars (Figure 6.15). The emission drop from 1992 onwards is explained by the penetration of catalyst cars into the Danish fleet. The 2020 emission shares for CH₄ were 62, 23, 13 and 2 % for passenger cars, 2-wheelers, heavy-duty vehicles and light-duty vehicles, respectively (Figure 6.17).

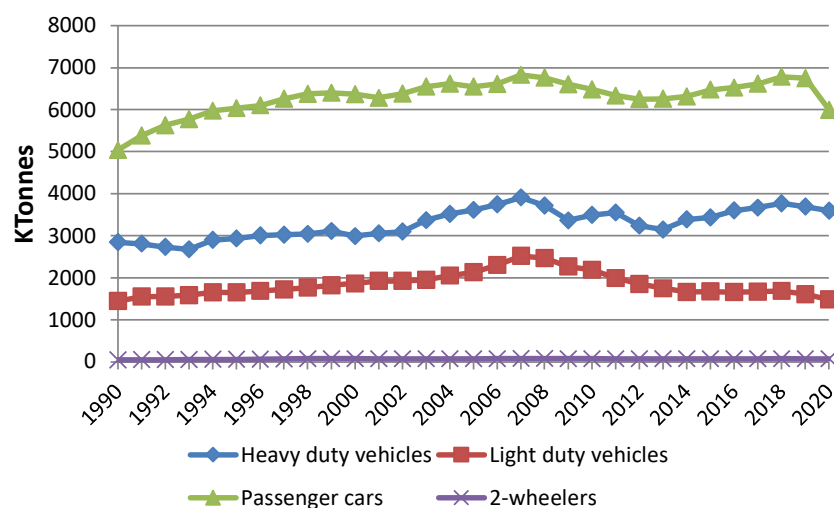


Figure 6.14 CO₂ emissions (ktonnes) per vehicle type for road transport 1990-2020.

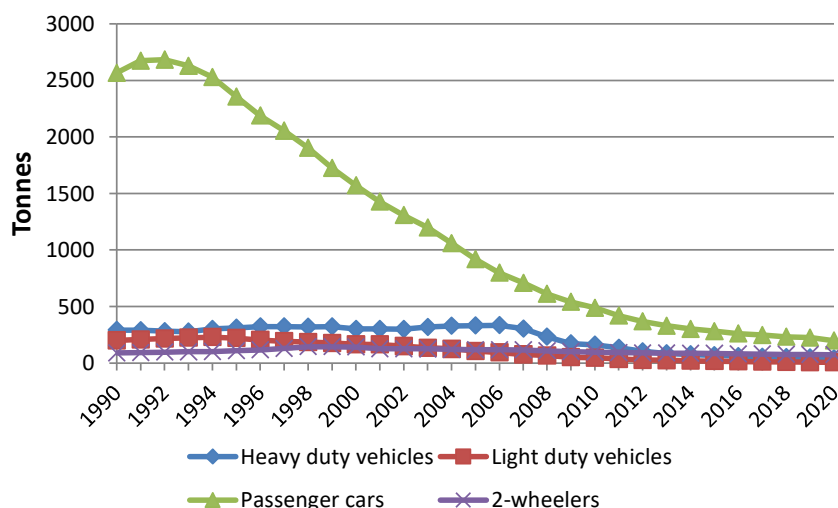


Figure 6.15 CH₄ emissions (tonnes) pr. vehicle type for road transport 1990-2020.

An undesirable environmental side effect of the introduction of catalyst cars is the increase in the emissions of N₂O from the first generation of catalyst cars (Euro 1) compared to conventional cars. The emission factors for later catalytic converter technologies are considerably lower than the ones for Euro 1, thus causing the emissions to decrease from 1998 onwards (Figure 6.16). In 2020, emission shares for passenger cars, heavy and light-duty vehicles were 57, 32 and 10 %, of the total road transport N₂O, respectively (Figure 6.17).

Referring to the fourth IPCC assessment report, 1 g CH₄ and 1 g N₂O has the greenhouse effect of 25 and 298 g CO₂, respectively. In spite of the relatively large CH₄ and N₂O global warming potentials, the largest contribution to the total CO₂ emission equivalents for road transport comes from CO₂, and the CO₂ emission equivalent shares per vehicle category are almost the same as the CO₂ shares.

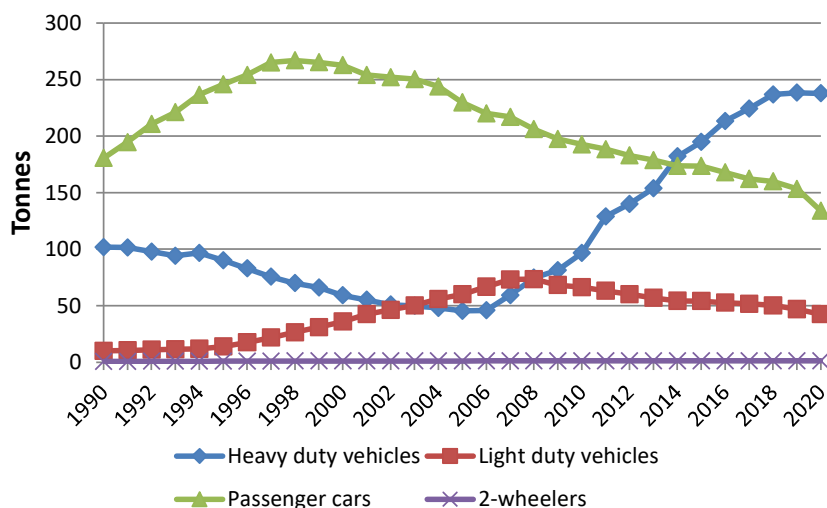


Figure 6.16 N₂O emissions (tonnes) per vehicle type for road transport 1990-2020.

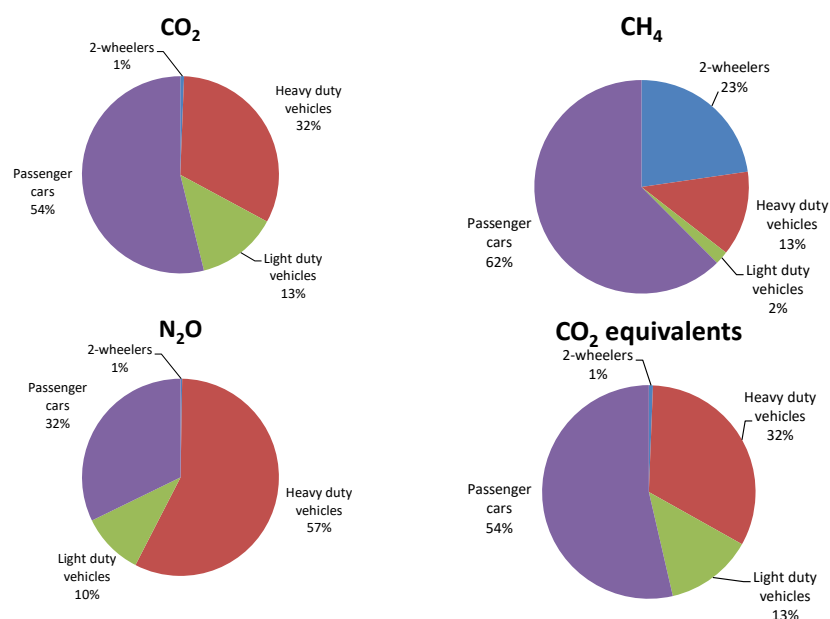


Figure 6.17 CO₂, CH₄ and N₂O emission shares and GHG equivalent emission distribution for road transport in 2020.

6.2.2 Other mobile sources

For other mobile sources, the highest CO₂ emissions in 2020 come from Agriculture/Forestry/Fisheries (1A4c), Industry-other (1A2g) and Navigation (1A3d), with shares of 39 %, 19 %, 16, respectively (Figure 6.21). The 1990-2020 emission trend is directly related to the fuel consumption development in the same time-period. Minor CO₂ emission contributors are sectors such as Commercial/Institutional (1A4a), Residential (1A4b), Railways (1A3c), Civil aviation (1A3a) and Other (1A5).

For CH₄, the most important sources are Agriculture/Forestry/Fisheries (1A4c), Navigation (1A3d), Commercial/Institutional (1A4a), Industry-other (1A2g), and Residential (1A4b), see Figure 6.21. The emission shares are 36 %, 19 %, 18 %, 9 % and 9 %, respectively in 2020. For the remaining sectors, the emission shares 6 % or less. The CH₄ emission contributions from Commercial/Institutional (1A4a) and Residential (1A4b) are quite high compared to their relative fuel consumption (and CO₂ emissions) contributions, due the high CH₄ emission factors for gasoline fuelled working machinery in general.

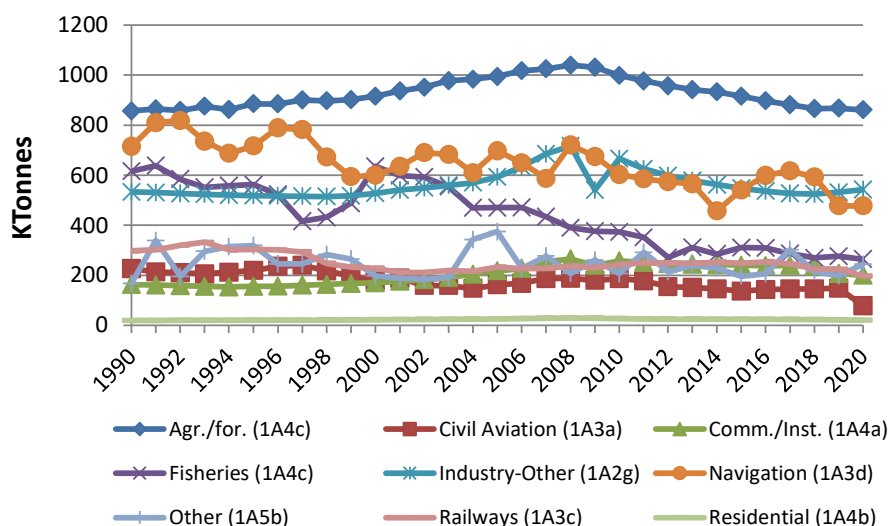


Figure 6.18 CO₂ emissions (ktonnes) in CRF sectors for other mobile sources 1990-2020.

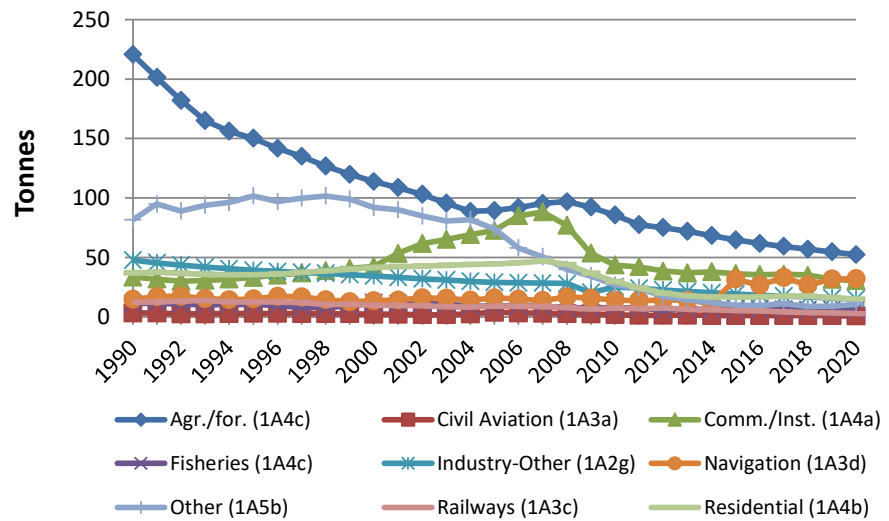


Figure 6.19 CH₄ emissions (tonnes) in CRF sectors for other mobile sources 1990-2020.

For N₂O, the emission trend in sub-sectors is the same as for fuel consumption and CO₂ emissions (Figure 6.20).

As for road transport, CO₂ alone contributes with by far the most CO₂ emission equivalents in the case of other mobile sources, and per sector the CO₂ emission equivalent shares are almost the same as those for CO₂, itself (Figure 6.21).

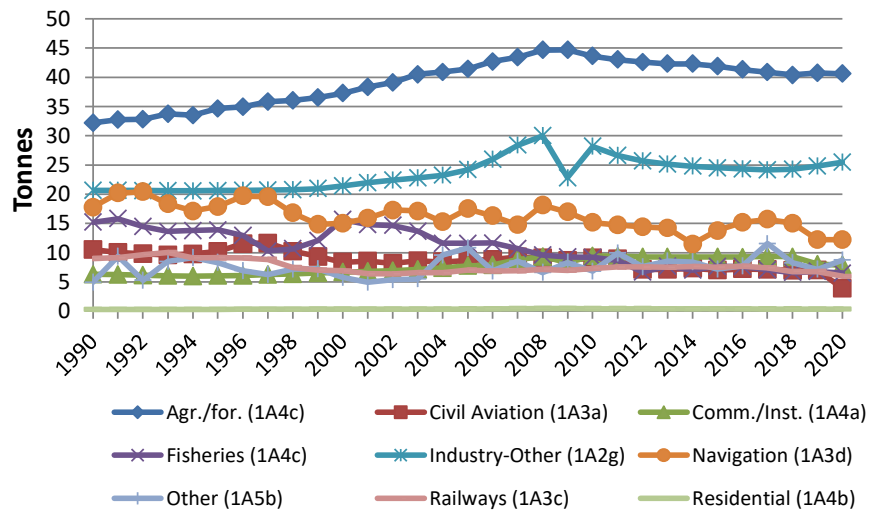


Figure 6.20 N₂O emissions (tonnes) in CRF sectors for other mobile sources 1990-2020.

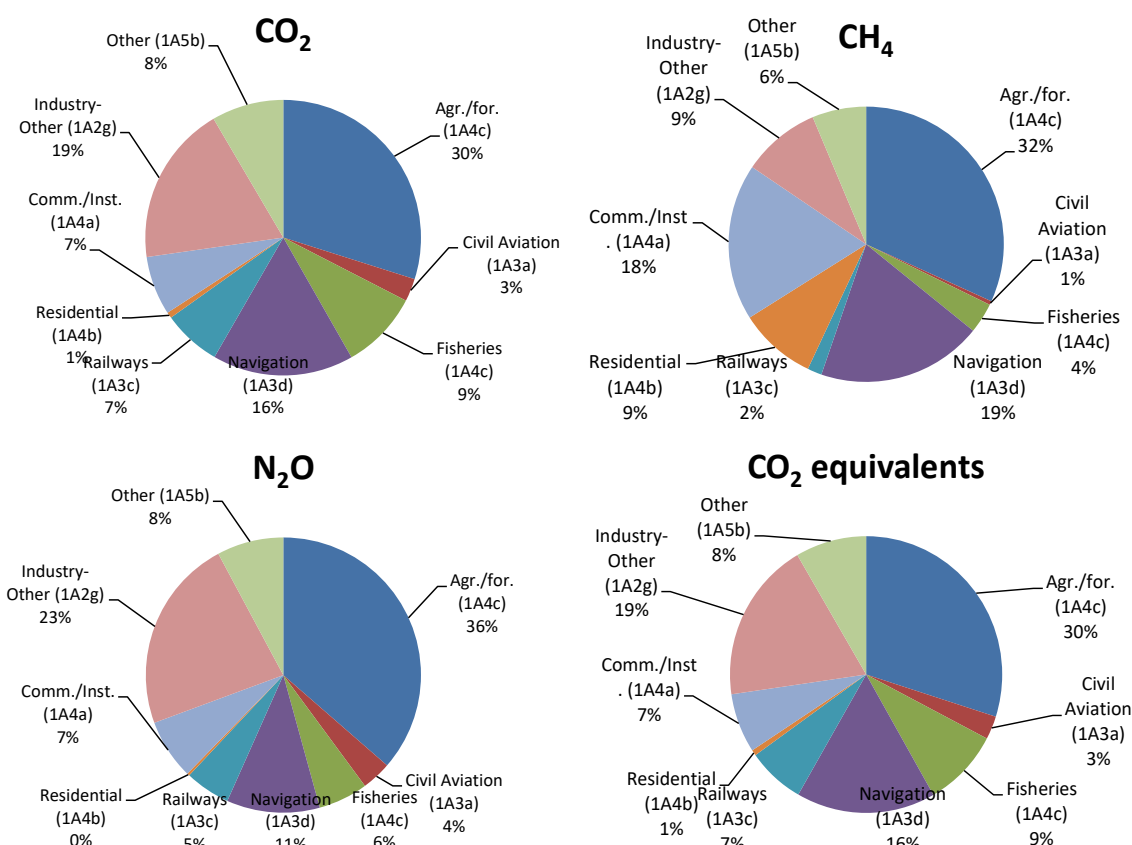


Figure 6.21 CO₂, CH₄ and N₂O emission shares and GHG equivalent emission distribution for other mobile sources in 2020.

6.3 Emissions of SO₂, NO_x, NMVOC, CO, NH₃, TSP, PM₁₀, PM_{2.5} and BC

In Table 6.3 the SO₂, NO_x, NMVOC, CO, NH₃, TSP, PM₁₀, PM_{2.5} and BC emissions for road transport and other mobile sources are shown for 2020 in NFR sectors. For Civil aviation, however, the emissions totals in Table 6.3 are summarized according to the CRF definition of Domestic aviation (domestic LTO + domestic cruise) and International aviation (international LTO + international cruise), as noted in Chapter 3 and in the beginning of paragraph 6.1. The emission figures in the time series 1985-2020 are given in Annex 16 (NFR format) and are shown for 2020 in Annex 15 (CollectER format).

From 1985 to 2020, the road transport emissions of SO₂, NO_x, NMVOC, CO, PM (exhaust emissions; all size fractions) and BC have decreased by 99, 77, 92, 91, 90 and 88 %, respectively (Figures 6.22-6.27), whereas the NH₃ emissions have increased by 1068 % during the same time period (Figure 6.28).

For other mobile sources, the emission changes for SO₂, NO_x, NMVOC, CO, PM (all size fractions) and BC are -96, -49, -66, -37, -79 and -80 %, respectively (Figures 6.31-6.36). The NH₃ emissions have increased by 15 % during the same time period (Figure 6.37).

Table 6.3 Emissions of SO₂, NO_x, NMVOC, CO, NH₃, TSP, PM₁₀, PM_{2.5} and BC in 2020 for road transport and other mobile sources.

	SO ₂ tonnes	NO _x tonnes	NMVOC tonnes	CO tonnes	NH ₃ tonnes	TSP tonnes	PM ₁₀ tonnes	PM _{2.5} tonnes	BC tonnes
Manufacturing industries/Construction (mobile)	3	1732	477	3770	1	137	137	137	94
Civil aviation (Domestic)	25	321	26	922	0	3	3	3	1
Road transport: Passenger cars	38	10837	2903	40659	646	162	162	162	93
Road transport: Light duty vehicles	9	7084	167	1767	42	90	90	90	68
Road transport: Heavy duty vehicles	23	4435	160	2090	43	71	71	71	42
Road transport: Mopeds & motorcycles	0	125	872	6197	1	13	13	13	2
Road transport: Gasoline evaporation	0	0	1331	0	0	0	0	0	0
Road transport: Brake wear	0	0	0	0	0	491	481	192	13
Road transport: Tyre wear	0	0	0	0	0	948	569	398	145
Road transport: Road abrasion	0	0	0	0	0	1148	574	310	0
Railways	1	1464	73	186	1	19	19	19	12
National navigation (Shipping)	219	9032	388	924	0	251	249	247	24
Commercial/Institutional: Mobile	1	643	762	27828	0	57	57	57	31
Residential: Household and gardening (mobile)	0	27	764	8363	0	12	12	12	1
Agriculture/Forestry/Fishing: Off-road agriculture/forestry	5	3557	913	9710	3	334	334	334	194
Agriculture/Forestry/Fishing: National fishing	167	4181	191	562	0	73	72	72	16
Other, Mobile	83	1238	272	3022	1	59	59	59	22
Road transport exhaust total	70	22482	5434	50712	733	337	337	337	206
Road transport non exhaust total	0	0	0	0	0	2587	1624	900	158
Other mobile sources total	505	22194	3866	55287	6	944	940	939	394
Domestic total	575	44676	9299	105999	739	3867	2901	2175	758
Civil aviation (International)	312	4714	74	890	0	48	48	48	21
Navigation (International)	1022	37637	1351	3975	0	1048	1038	1033	67

6.3.1 Road transport

The stepwise lowering of the sulphur content in diesel fuel has given rise to a substantial decrease in the road transport emissions of SO₂ (Figure 6.22). In 1999, the sulphur content was reduced from 500 ppm to 50 ppm (reaching gasoline levels), and for both gasoline and diesel the sulphur content was reduced to 10 ppm in 2005. Since Danish diesel and gasoline fuels have the same sulphur percentages, at present, the 2020 shares for SO₂ emissions and fuel consumption for passenger cars, heavy-duty vehicles, light-duty vehicles and 2-wheelers are the same in each case: 54, 32, 13 and 1 %, respectively (Figure 6.29).

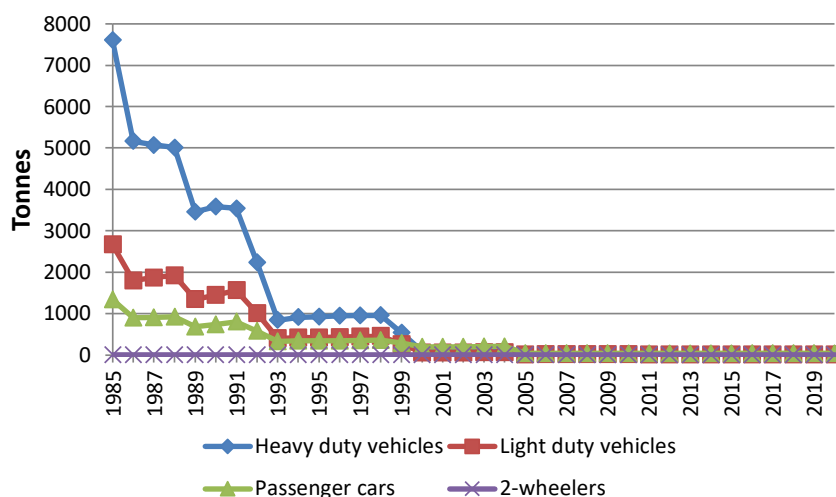


Figure 6.22 SO₂ emissions (tonnes) per vehicle type for road transport 1985-2020.

Historically, the emission totals of NMVOC and CO have been very dominated by the contributions coming from private cars, as shown in Figures 6.24-6.25. However, the NMVOC and CO (and NO_x) emissions from this vehicle type have shown a steady decreasing tendency since the introduction of private catalyst cars in 1990 (EURO I) and the introduction of even more emission-efficient EURO II, III, IV and V private cars (introduced in 1997, 2001, 2006 and 2011, respectively).

For NO_x the emission decrease for passenger cars is composed of a significant drop in emissions from gasoline cars driven by technology improvements, and an increase in emissions from diesel cars due to the dieselization of the Danish vehicle fleet, and almost unchanged emission factors for diesel passenger cars until Euro 6, regardless of EU emission legislation demands. For light duty vehicles, the NO_x emission trend is also the result of a technology driven emission reduction for gasoline vehicles, and a traffic induced emission increase for diesel vehicles; the emission factors for the latter vehicle category have been relatively constant until Euro 6 just as for diesel cars.

The most modern Euro 6d-TEMP diesel passenger cars and light duty vehicles which entered into the fleet in 2018 and 2019, respectively, however, have significantly lower NO_x emission factors compared to earlier Euro standards. Hence the gradual growth in the numbers of Euro 6d-TEMP is going to reduce the emissions for diesel passenger cars and light duty vehicles in the years to come. Relatively large NO_x emission reductions is noted for passenger cars in 2020 related to COVID-19.

For heavy duty vehicles until Euro III, the real traffic NO_x emissions are not reduced in the order as intended by the EU emission legislation. Most markedly for Euro II engines, the emission factors are even higher than for Euro I due to the so-called engine cycle-beating effect. Outside the legislative test cycle stationary measurement points, the electronic engine control for heavy duty Euro II and III engines switches to a fuel efficient engine running mode, thus leading to increasing NO_x emissions (Figure 6.23). However, the reduction in transport activities due to the global financial crisis in 2008 and 2009 and improved emission factors for Euro IV onwards causes the NO_x emissions for heavy duty vehicles to decrease significantly from 2008.

Exhaust particulate emissions from road transportation vehicles are well below PM_{2.5}. The emissions from light- and heavy-duty vehicles have significantly decreased since the mid-1990s due to gradually stricter EURO emission standards. In recent years until 2008 the environmental benefit of introducing gradually cleaner diesel private cars has been somewhat outbalanced by an increase in sales of new vehicles. After 2008, the PM emissions gradually become lower due to the increasing number of Euro V cars equipped with particulate filter sold in Denmark from 2006 onwards (Figure 6.26).

BC - commonly understood as the solid part of the particulate emissions - is calculated as shares of TSP for each Euro engine technology class (Figure 6.27). In broad terms, the development in BC emissions follows the TSP emission trend, but deviates in some cases, most markedly for diesel cars and vans. For these vehicle types the BC share of TSP increases in moderate steps from conventional engine technologies to Euro IV. As a result, the BC emission development becomes environmentally less positive than for TSP, until the introduction of Euro V vehicles, for which the installed particulate filters have very high removal rates of BC.

An undesirable environmental side effect of the introduction of catalyst cars is the increase in the emissions of NH_3 from the first two generations of catalyst cars (Euro I and II) compared to conventional cars. The emission factors for later catalytic converter technologies are considerably lower than the ones for Euro I and II, thus causing the emissions to decrease from 2001 onwards (Figure 6.28).

The 2020 emission shares for passenger cars, heavy-duty vehicles, light-duty vehicles and 2-wheelers for NO_x (48, 20, 31 and 1 %), NMVOC (53, 3, 3 and 16 %), CO (80, 4, 4 and 12 %), PM (48, 21, 27 and 4 %), BC (34, 47, 19 and 0 %), and NH_3 (88, 6, 6 and 0 %), are also shown in Figure 6.29.

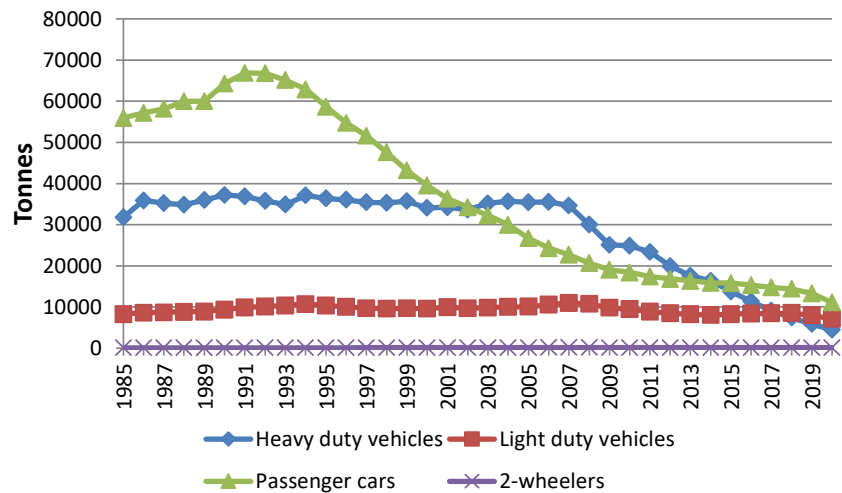


Figure 6.23 NO_x emissions (tonnes) per vehicle type for road transport 1985-2020.

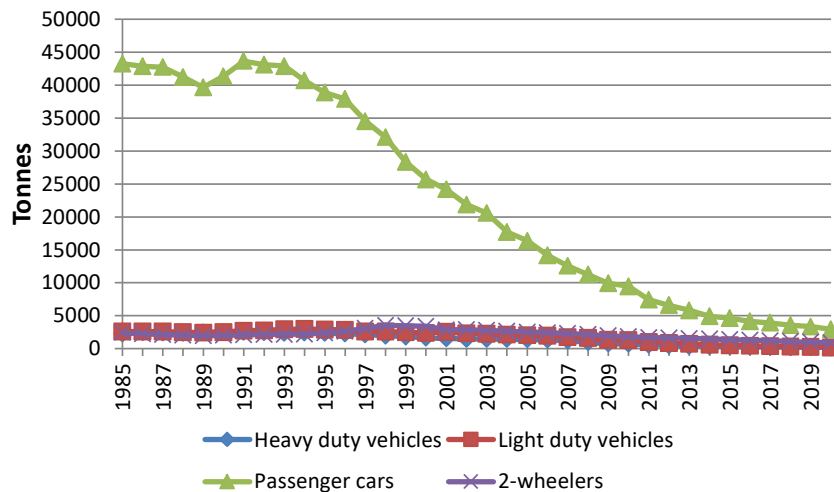


Figure 6.24 NMVOC emissions (tonnes) per vehicle type for road transport 1985-2020.

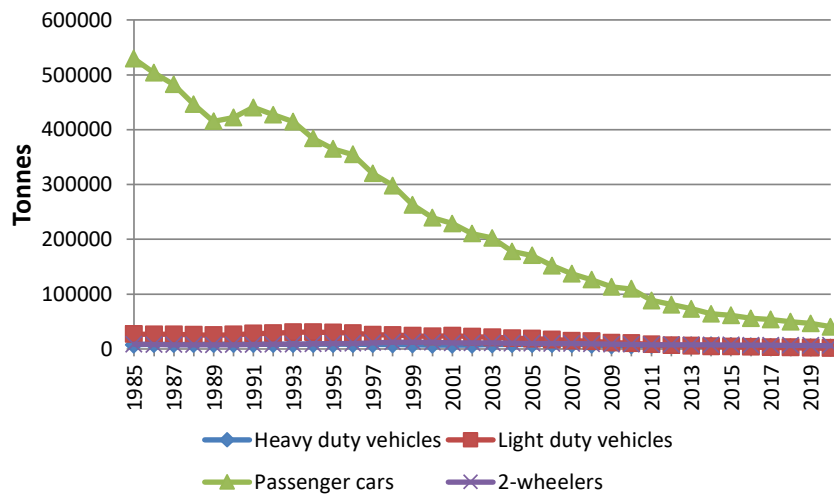


Figure 6.25 CO emissions (tonnes) per vehicle type for road transport 1985-2020.

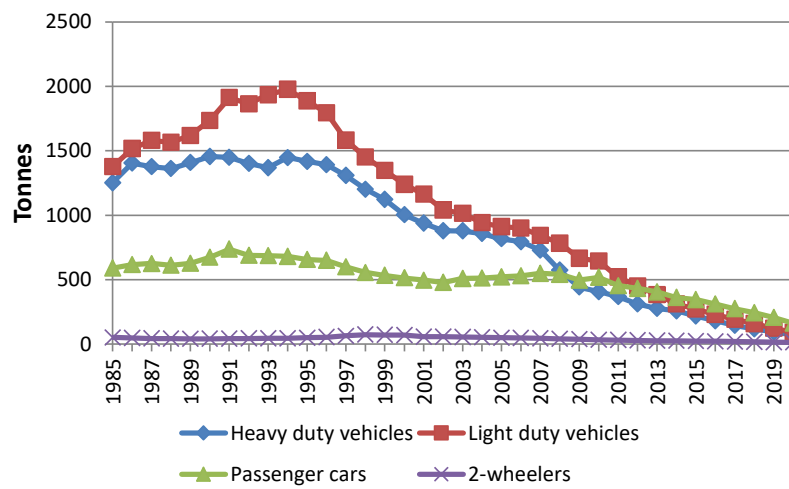


Figure 6.26 PM emissions (tonnes) per vehicle type for road transport 1985-2020.

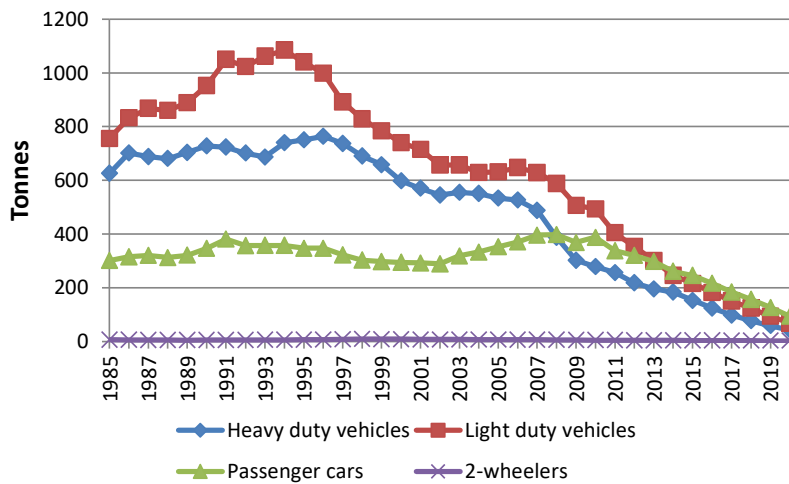


Figure 6.27 BC emissions (tonnes) per vehicle type for road transport 1985-2020.

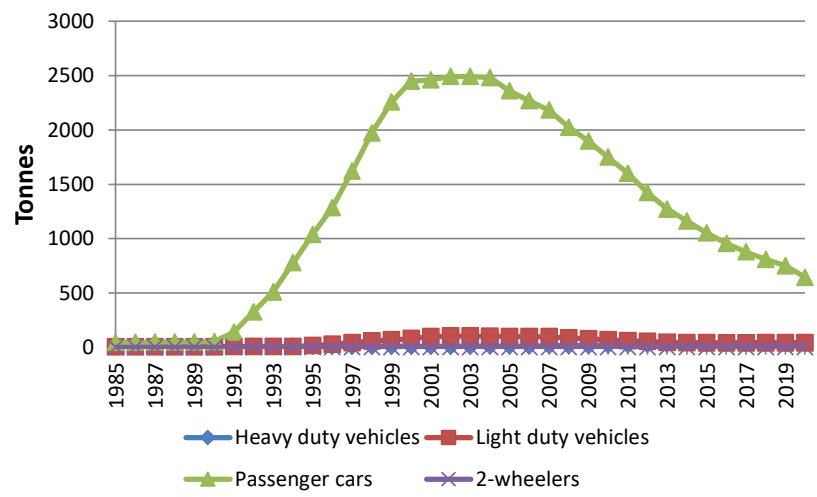


Figure 6.28 NH₃ emissions (tonnes) per vehicle type for road transport 1985-2020.

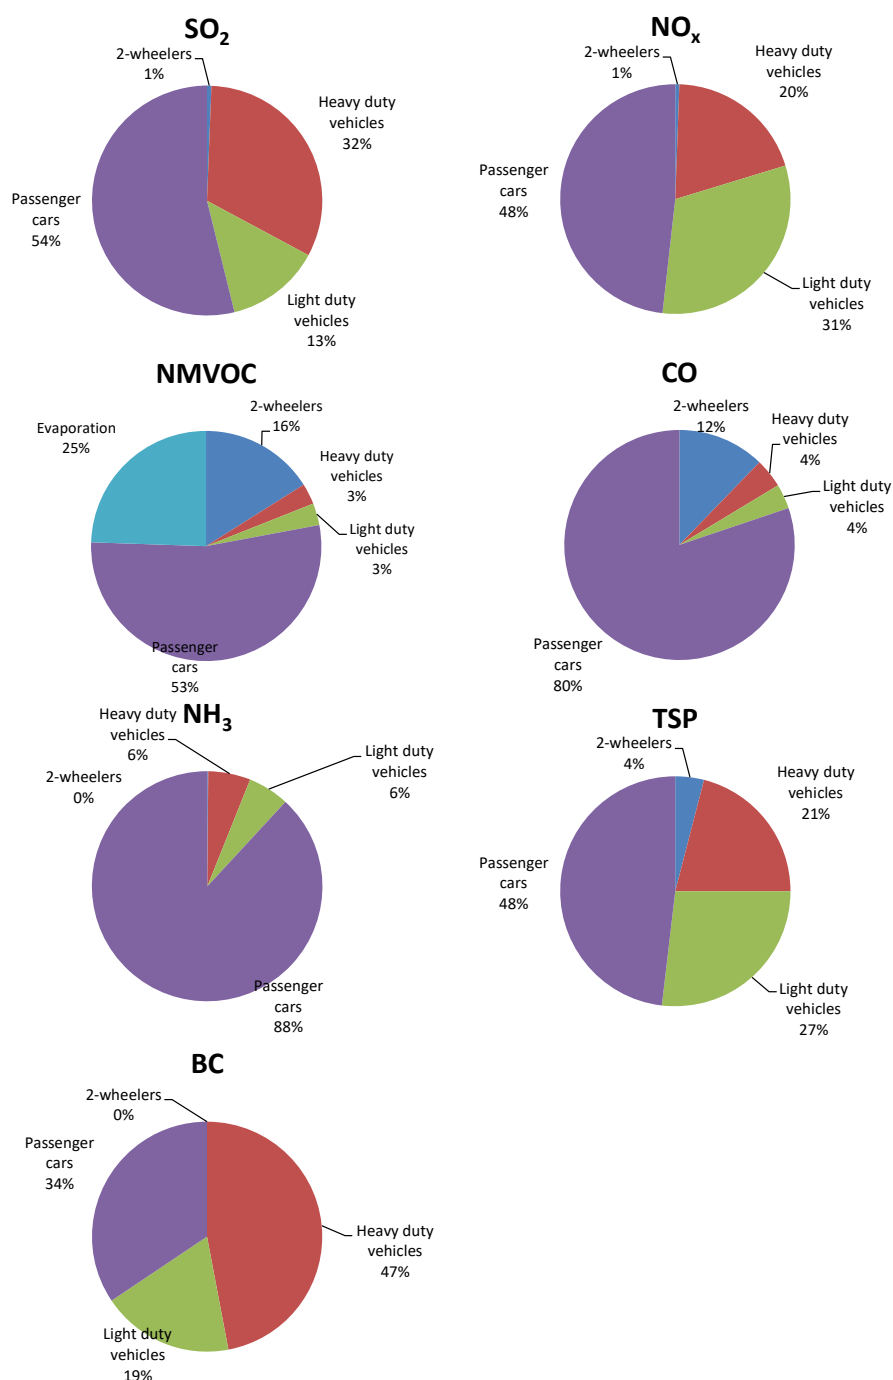


Figure 6.29 SO₂, NO_x, NMVOC, CO, NH₃, PM and BC emission shares per vehicle type for road transport in 2020.

6.3.2 Non-exhaust emissions of TSP, PM₁₀, PM_{2.5} and BC

Apart from the exhaust emission estimates of particulate matter (PM), the Danish emission inventories also comprise the non-exhaust PM emissions coming from road transport brake and tyre wear, and road abrasion.

Table 6.3 shows the non-exhaust TSP, PM₁₀, PM_{2.5} and BC emissions for road transport for 2020 in NFR sectors. The activity data and emission factors are also shown in Annex 15.

The respective source category distributions for TSP, PM₁₀ and PM_{2.5} emissions are identical for each of the non-exhaust emission types: brake wear, tyre wear and road abrasion, and, hence, only the PM₁₀ distributions are shown in

Figure 6.30. Passenger cars caused the highest emissions in 2020, followed by trucks, light-duty vehicles, buses and 2-wheelers.

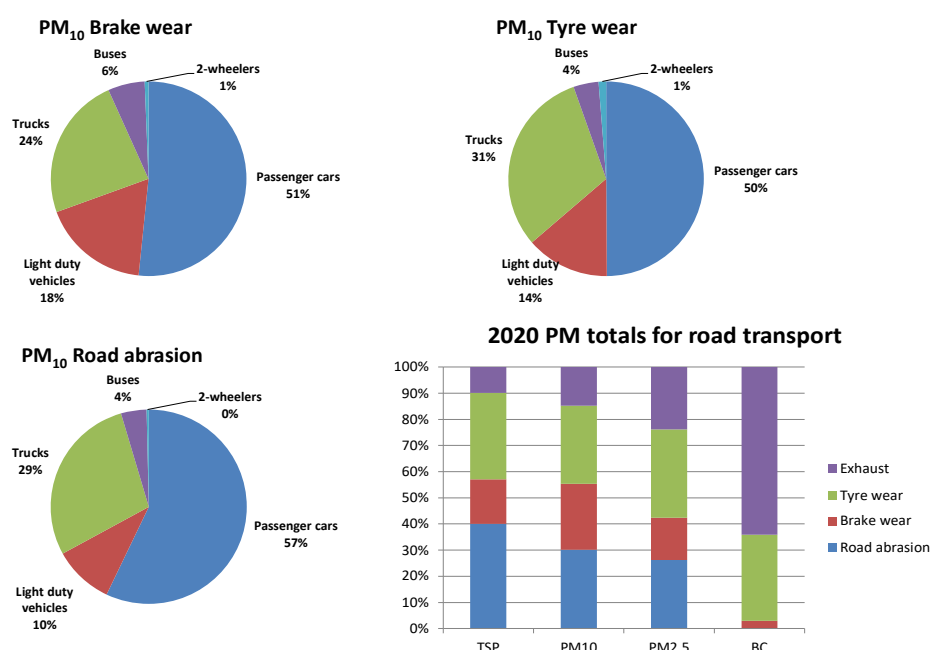


Figure 6.30 Brake and tyre wear and road abrasion PM₁₀ emission shares and PM and BC exhaust/non-exhaust distributions for road traffic in 2020.

Figure 6.30 also shows the exhaust/non-exhaust distribution of the total particulate emissions from road transport, for each of the size classes TSP, PM₁₀ and PM_{2.5} and for BC. The exhaust emission shares of total road transport TSP, PM₁₀, PM_{2.5} and BC are 10, 15, 24 and 64 %, respectively, in 2020. For brake and tyre wear and road abrasion, the TSP shares are 17, 33 and 40 %, respectively. The same three sources have PM₁₀ shares of 25, 30 and 30 %, respectively, PM_{2.5} shares of 16, 34 and 26 %, and BC shares of 3, 33 and 0 %, respectively. In general, the non-exhaust shares of total particulate emissions are expected to increase in the future as total exhaust emissions decline. The latter emission trend is due to the stepwise strengthening of exhaust emission standards for all vehicle types.

6.3.3 Other mobile sources

For SO₂ the trends in the Navigation (1A3d) emissions shown in Figure 6.31 mainly follow the development of the heavy fuel oil consumption (Figure 6.11). The SO₂ emissions for Fisheries (1A4c) correspond with the development in the consumption of marine gas oil. The main explanation for the development of the SO₂ emission curves for Railways (1A3c) and non-road machinery in Agriculture/Forestry (1A4c) and Industry (1A2f), are the stepwise sulphur content reductions for diesel used by machinery in these sectors.

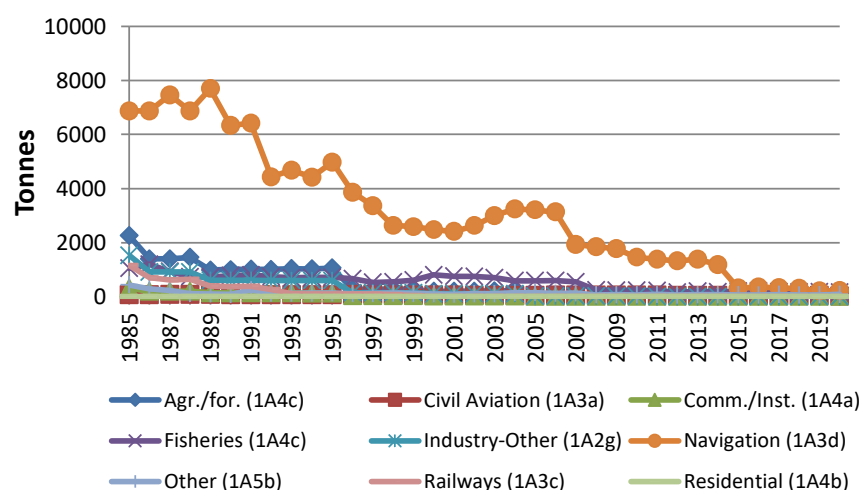


Figure 6.31 SO₂ emissions (ktonnes) in NFR sectors for other mobile sources 1985-2020.

NO_x emissions mainly come from diesel machinery, and the most important sources are Navigation (1A3d), Agriculture/Forestry/Fisheries (1A4c), Industry (1A2f) and Railways (1A3c), as shown in Figure 6.32. The 2020 emission shares are 41, 35, 8 and 7 %, respectively (Figure 6.38). Minor emissions come from the sectors Other (1A5), Civil aviation (1A3a), Commercial/Institutional (1A4a) and Residential (1A4b).

The NO_x emission trend for Navigation, Fisheries and Agriculture/Forestry is determined by fuel consumption fluctuations for these sectors, and the development of emission factors.

For ship engines, the emission factors tend to increase for new engines until mid-1990s. After that, the emission factors gradually reduce until 2000, bringing them to a level comparable with the emission limits for new engines in this year. From 2012, the high-speed ferry “Catexpress” entered into service on the two important Danish domestic ferry routes “Sjællands Odde-Ebeltoft” and “Sjællands Odde-Aarhus”. The ferry “Catexpress” has relatively high NO_x emission factors and relatively low specific fuel consumption factors, this causes the implied NO_x emission factor to change.

For agricultural and forestry machines the diesel fuel consumption increases from 1985 to 2008 and is then followed by a decrease from 2009 onwards (Figure 6.9). The NO_x emission performance for non road diesel machinery are characterized by somewhat higher NO_x emission factors for 1991-stage I machinery, and gradually improved emission performance for stage I and onwards emission technology levels entering the stock since the late 1990s. Consequently, the total NO_x emissions for agriculture/forestry increase up to 2001, and then reduces from 2003 onwards.

The NO_x emissions for industrial non-road machinery decline from 1985-2020. The emission reductions are, however, mostly pronounced from 2009 onwards. The emission development from 1985 to 2020 for industry NO_x is the product of a rather constant fuel consumption from 1985-1999, a fuel consumption increase from 2000 to 2008, and a fuel consumption decrease from 2009 onwards (Figure 6.9), in combination with a development in emission factors as explained for agricultural machinery. For industry, the NO_x emission impact from the global financial crisis becomes very visible for 2009.

For railways, the gradual shift towards electrification explains the declining trend in diesel fuel consumption and NO_x emissions for this transport sector until 2001.

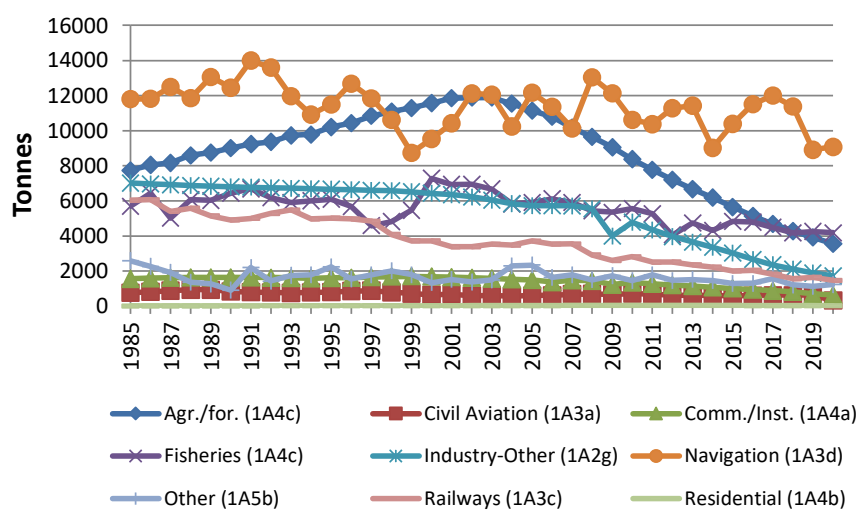


Figure 6.32 NO_x emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

The 1985-2020 time series of NMVOC and CO emissions are shown in Figures 6.33 and 6.34 for other mobile sources. The 2020 sector emission shares are shown in Figure 6.38. For NMVOC, the most important sectors are Agriculture/Forestry/Fisheries (1A4c), Residential (1A4b), Commercial/Institutional (1A4a) and Industry (1A2g), with 2020 emission shares of 28, 20, 20 and 12 %, respectively.

The same four sectors also contribute with most of the CO emissions. For Commercial/Institutional (1A4a), Agriculture/Forestry/Fisheries (1A4c) and Residential (1A4b) the emission shares are 50, 19 and 15 %, respectively. Minor NMVOC and CO emissions come from Navigation (1A3d), Railways (1A3c), Civil Aviation (1A3a) and Other (1A5).

For NMVOC and CO, the significant emission increases for the commercial/institutional and residential sectors after 2000 are due to the increased number of gasoline working machines. Improved NMVOC emission factors for diesel machinery in agriculture and gasoline equipment in forestry (chain saws) are the most important explanations for the NMVOC emission decline in the Agriculture/forestry/fisheries sector. This explanation also applies for the industrial sector, which is dominated by diesel-fuelled machinery. From 1997 onwards, the NMVOC emissions from Other (1A5) decrease due to the gradually phase-out of the 2-stroke engine technology for recreational craft. The main reason for the significant 1985-2006 CO emission decrease for Agriculture/forestry-/fisheries is the phasing out of gasoline tractors.

As shown in Figure 6.38, for other mobile sources the largest TSP contributors in 2020 are Agriculture/Forestry/Fisheries (1A4c), Navigation (1A3d) and Industry (1A2f) with emission shares of 33 %, 27 % and 15 %, respectively. The remaining sectors: Railways (1A3c), Civil aviation (1A3a), Other (1A5), Commercial/Institutional (1A4a) and Residential (1A4b) represent only minor emission sources.

The 1985-2020 TSP emissions for navigation and fisheries are determined by the fuel consumption fluctuations in these years, and the development of the

emission factors, which to a major extent is a function of the fuel type and fuel sulphur content.

For agriculture/forestry the TSP emissions development from 1985-2020 are also determined by the development of fuel consumption and emission factors. The diesel consumption increases from 1985 to 2008 followed by a decrease from 2009 onwards (Figure 6.9), whereas the emission factors are gradually reduced during the whole time period. Consequently, the total TSP emissions for agriculture/forestry are quite constant until 1990, and then reduced from 1991 onwards.

The TSP emissions for industrial non-road machinery decline from 1985-2020. The latter emission development is the product of gradually reduced emission factors throughout the period, in combination with a rather constant fuel consumption from 1985-1999, which later on increases from 2000 to 2008 followed by a fuel consumption decrease from 2009 onwards (Figure 6.35). For industry, the TSP emission impact from the global financial crisis becomes very visible for 2009.

The TSP emission explanations for railways are the same as for NO_x (Figure 6.32).

Apart from marine engines, BC is calculated as shares of TSP for each engine emission technology class and in broad terms the development in BC emissions follows the TSP emission trend. For marine engines (used in navigation and fisheries) fuel type and engine type specific BC emission factors are used in the emission calculations, and hence the BC emissions rely on the fuel consumption development per fuel type and engine type in the inventory period.

The amounts of NH₃ emissions calculated for other mobile sources are very small. The largest emission sources are Agriculture/Forestry/Fisheries (1A4c), Industry (1A2f), Other (1A5b) and Railways (1A3c), with emission shares of 43 %, 24 %, 15 % and 9 %, respectively.

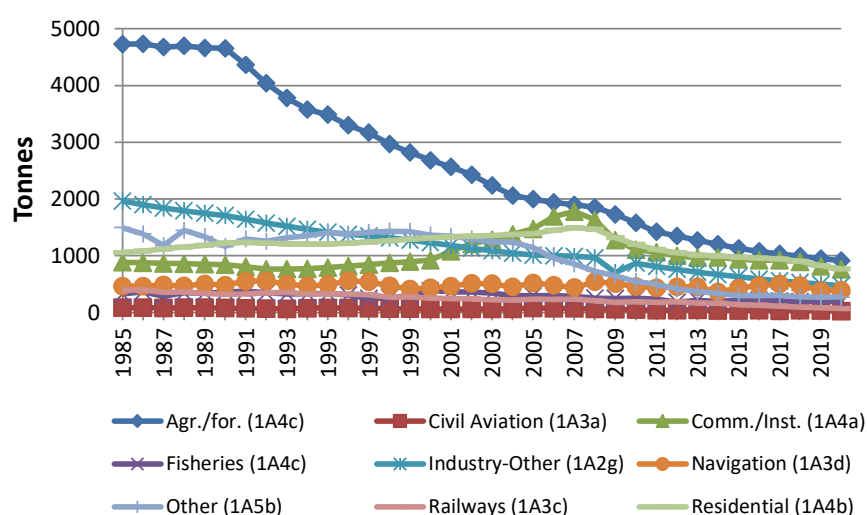


Figure 6.33 NMVOC emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

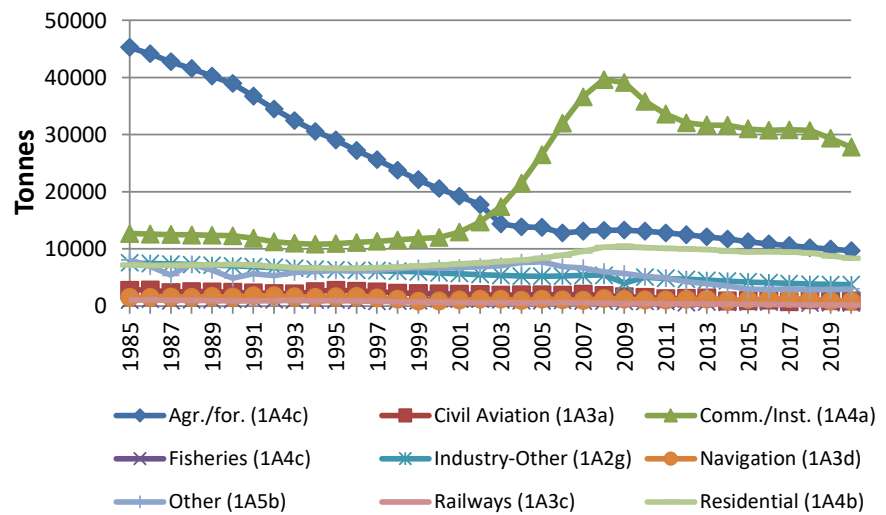


Figure 6.34 CO emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

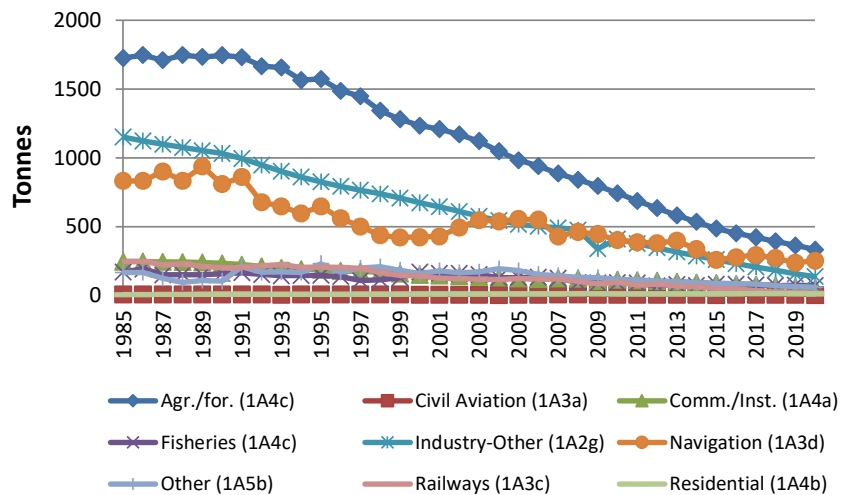


Figure 6.35 TSP emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

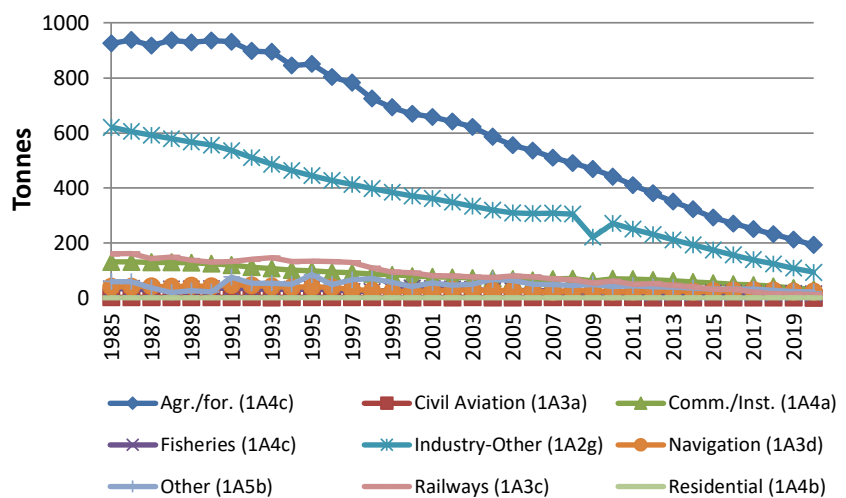


Figure 6.36 BC emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

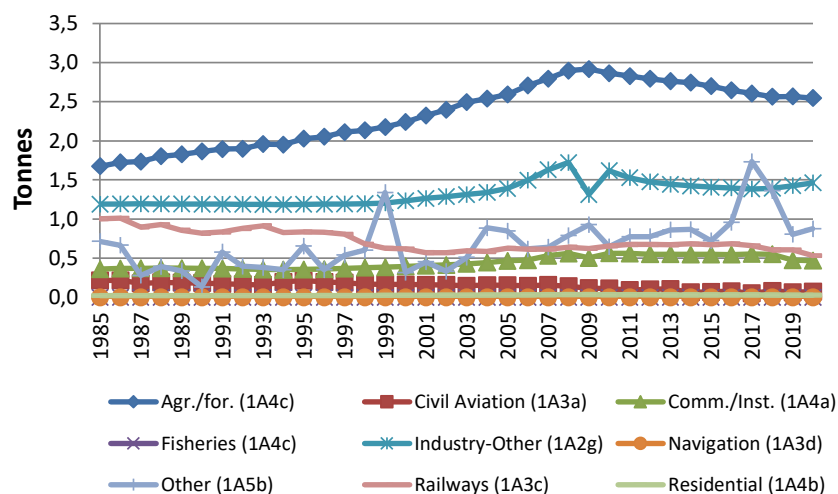


Figure 6.37 NH₃ emissions (tonnes) in NFR sectors for other mobile sources 1985-2020.

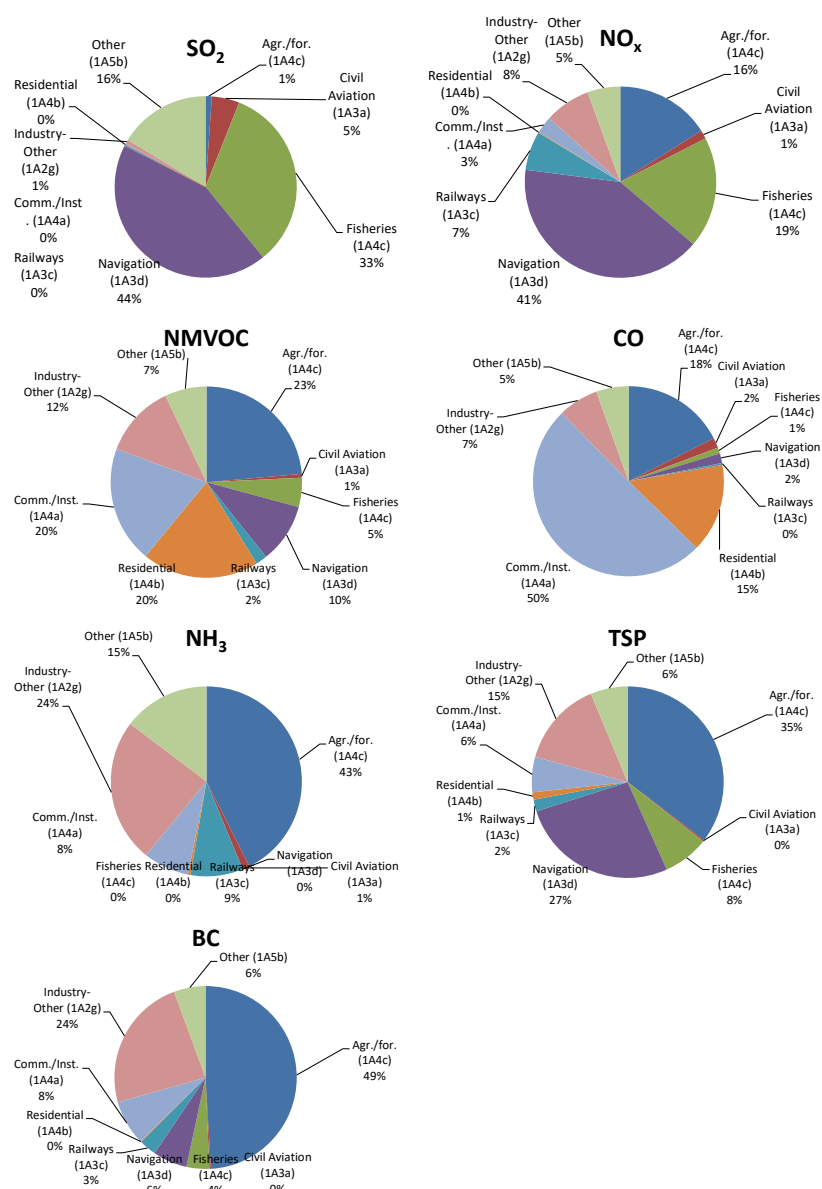


Figure 6.38 SO₂, NO_x, NMVOC, CO, NH₃, PM and BC emission shares per vehicle type for other mobile sources in 2020.

6.4 Heavy metals

In Table 6.4, the heavy metal emissions for road transport and other mobile sources are shown for 2020 in NFR sectors. The emission figures in the time series 1990-2020 are given in Annex 16 (NFR format) and are shown for 1990 and 2020 in Annex 15 (CollectER format).

Table 6.4 Heavy metal emissions in 2020 for road transport and other mobile sources.

	Arsenic	Cadmium	Chromium	Copper	Mercury	Nickel	Lead	Selenium	Zinc
	kg	kg	kg	kg	kg	kg	kg	kg	kg
Manufacturing industries/Construction (mobile)	0	1	5	3	1	1	8	0	273
Civil aviation (Domestic)	0	0	0	0	0	0	598	0	2
Road transport: Passenger cars	0	27	56	85	14	30	117	0	5459
Road transport: Light duty vehicles	0	5	15	11	3	5	27	0	925
Road transport: Heavy duty vehicles	0	7	27	19	6	7	41	0	1386
Road transport: Mopeds & motorcycles	0	0	0	0	0	0	0	0	23
Road transport: Gasoline evaporation	0	0	0	0	0	0	0	0	0
Road transport: Brake wear	5	4	57	37465	0	54	4839	10	8099
Road transport: Tyre wear	1	2	3	15	0	24	76	19	10368
Road transport: Road abrasion	0	0	23	11	0	18	54	0	87
Railways	0	0	2	1	0	1	3	0	99
National navigation (Shipping)	26	2	13	26	4	1255	19	38	91
Commercial/Institutional: Mobile	0	1	1	2	0	1	3	0	106
Residential: Household and gardening (mobile)	0	0	0	0	0	0	0	0	14
Agriculture/Forestry/Fishing: Off-road agriculture/forestry	0	2	8	6	1	2	13	0	437
Agriculture/Forestry/Fishing: National fishing	4	1	3	4	2	6	8	17	42
Other, Mobile	0	0	1	1	0	0	2	0	73
Road transport exhaust total	1	39	98	115	22	42	185	0	7793
Road transport non exhaust total	6	6	83	37491	0	97	4969	29	18554
Other mobile sources total	30	8	33	44	10	1266	654	55	1137
Domestic total	37	53	214	37650	32	1404	5809	84	27484
Civil aviation (International)	0	0	0	0	0	0	0	0	0
Navigation (International)	108	9	50	108	13	5532	69	139	329

The heavy metal emission estimates for road transport are based on a national research study made by Winther and Slentø (2010). The latter study calculate the exhaust related emissions from fuel and engine oil as well as the wear related emissions from tyre, brake and road wear. Apart from Pb, the emission factors only deviate to a less extent due to changes in fleet and mileage composition over the years. This brings relative changes in fuel consumption per fuel type, engine oil use and aggregated emission factors for brake, tyre and road wear.

The most important exhaust related emissions for road transport are Cd, Cr, Hg and Zn. The most important wear related emissions are Cu and Pb almost solely coming from tyre wear, and Zn from brake and tyre wear. For other mobile sources, the most important emission contributions are calculated for Ni, Se and As, coming from the use of marine diesel oil in fisheries and navigation and residual oil in navigation.

The figures 6.39 and 6.40 show the heavy metal emission distributions for all road transport sources split into vehicle categories, and for other mobile sectors, respectively.

For non-road mobile machinery in agriculture, forestry, industry, commercial/institutional and recreational, as well as military and railways, fuel related emission factors from road transport are used derived for the year 2009.

For civil aviation, jet fuel no emissions are estimated due to lack of emission data, whereas for aviation gasoline fuel related emission factors for road transport gasoline is used derived for the year 2009, except for Pb where national data exist.

For navigation and fisheries, the heavy metal emission factors are fuel related, and are taken from the EMEP/EEA guidebook.

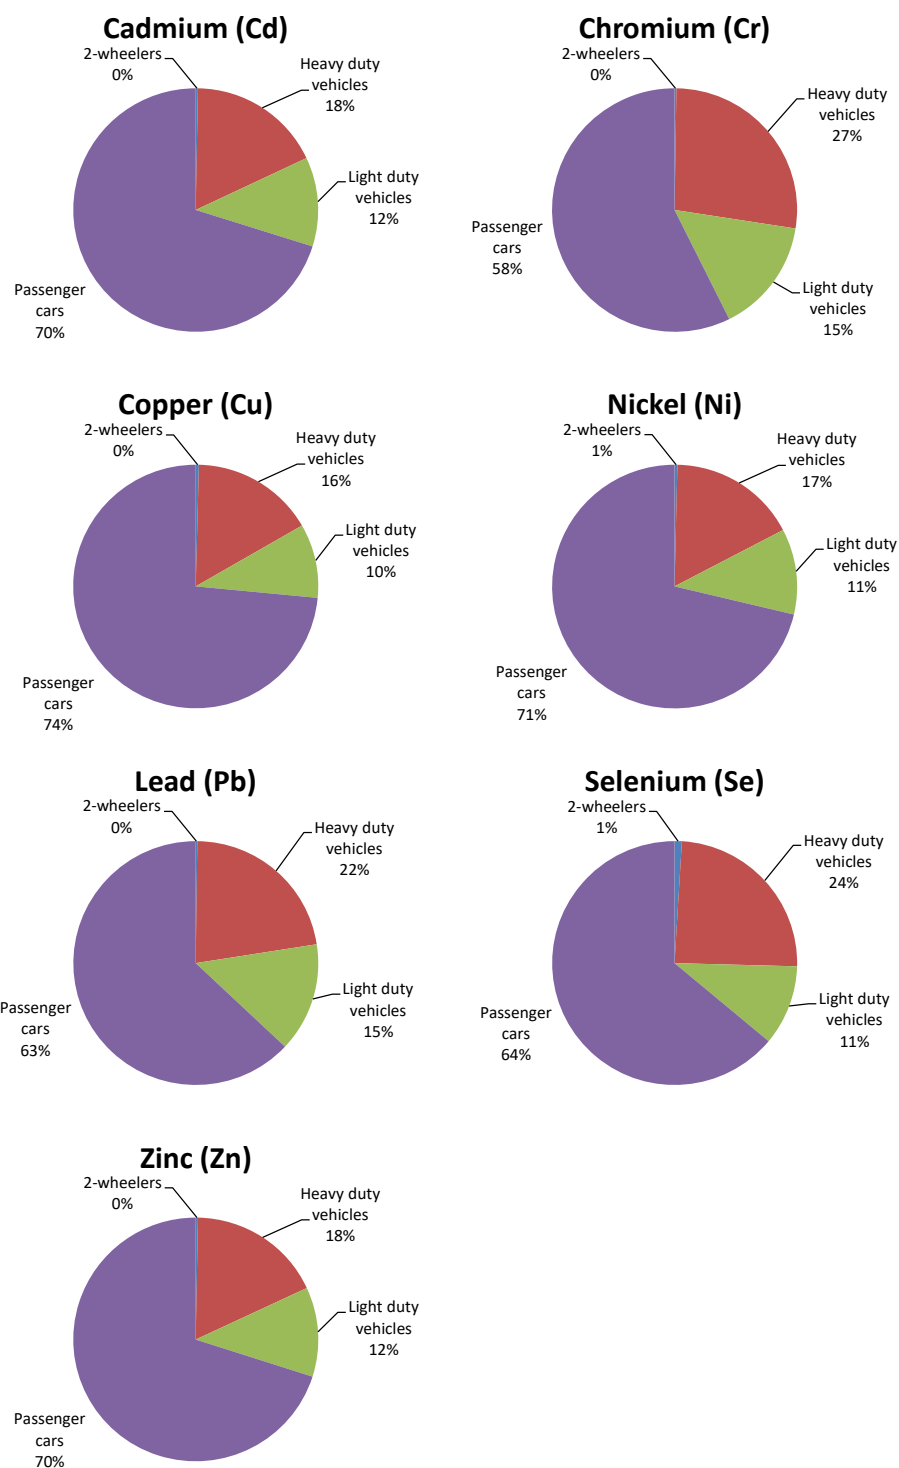


Figure 6.39 Heavy metal emission shares for road transport in 2020.

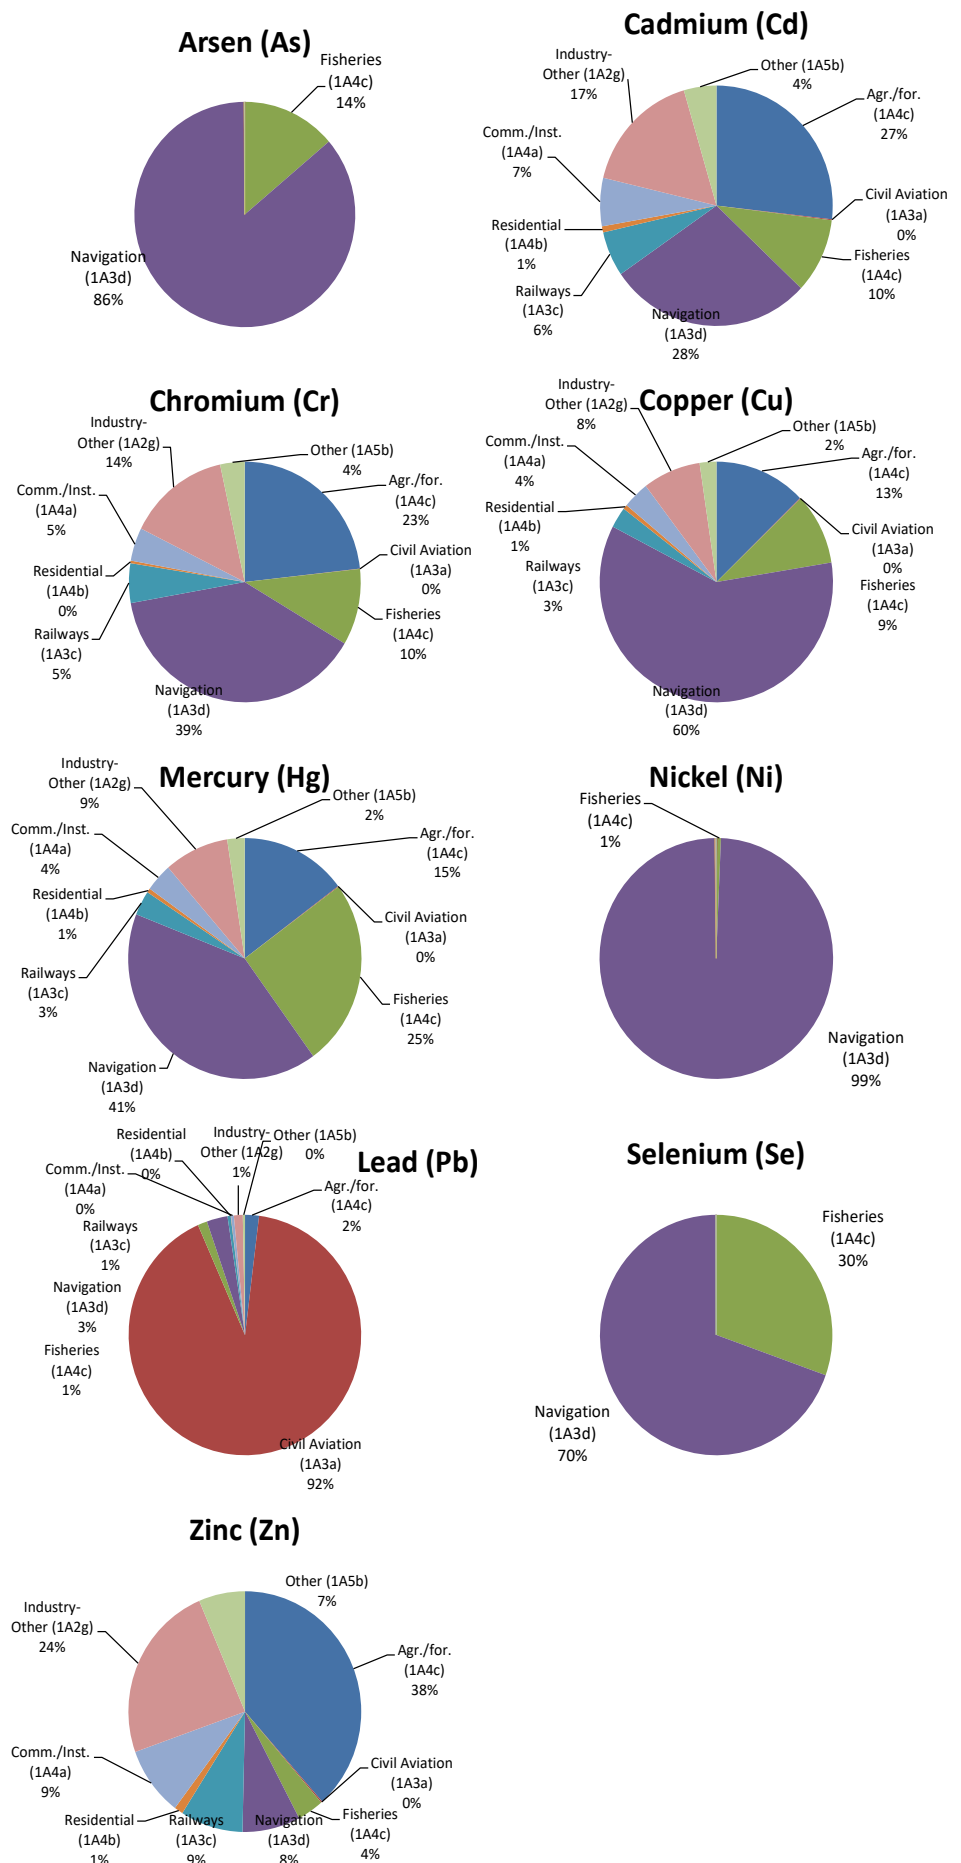


Figure 6.40 Heavy metal emission shares for other mobile sources in 2020.

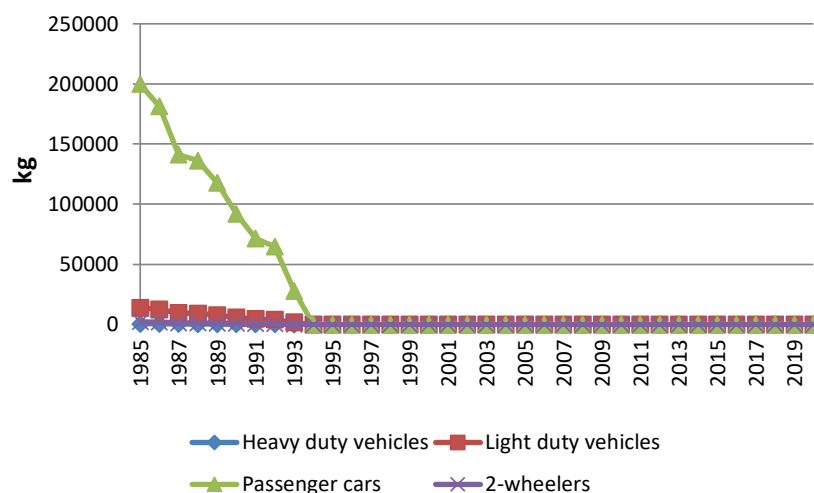


Figure 6.41 Pb emissions (kg) per vehicle type for road transport 1985-2020.

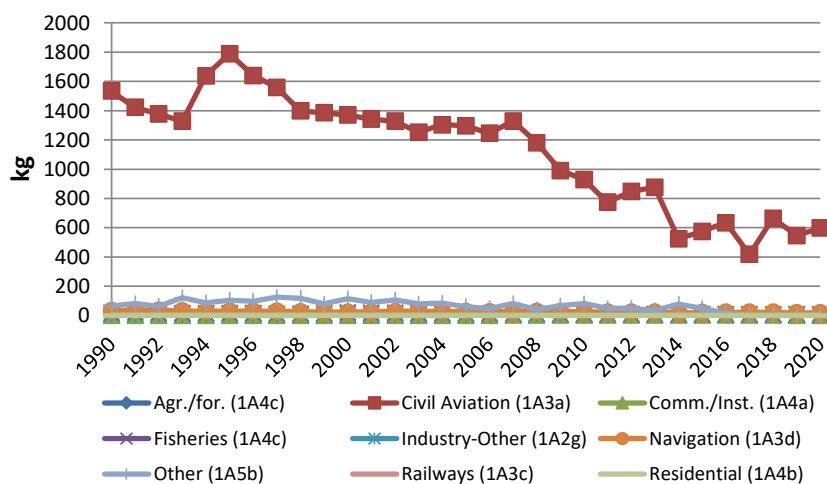


Figure 6.42 Pb emissions (kg) in NFR sectors for other mobile sources 1990-2020.

6.5 Persistent organic pollutants

In Table 6.5, the emissions of persistent organic pollutants (POPs), i.e. dioxins, PAHs, HCB and PCBs for road transport and other mobile sources are shown for 2020 in NFR sectors. The emission figures in the time series 1990-2020 are given in Annex 16 (NFR format) and are shown for 1990 and 2020 in Annex 15 (CollectER format).

Table 6.5 Dioxin, PAH, HCB and PCB emissions in 2020 for road transport and other mobile sources.

	HCB	Dioxins/Furans	Benzo(b) fluoranthene	Benzo(k) fluoranthene	Benzo(a) pyrene	Indeno (1,2,3-c,d) pyrene	PCB
	g	g	kg	kg	kg	kg	g
Manufacturing industries/Construction (mobile)	0.043	0.006	3.6	3.4	1.8	1.9	0.004
Civil aviation (Domestic)	0.000	0.000	0.0	0.0	0.0	0.0	0.000
Road transport: Passenger cars	0.232	0.039	45.0	34.6	40.0	39.7	0.075
Road transport: Light duty vehicles	0.125	0.011	14.1	11.1	12.6	11.8	0.019
Road transport: Heavy duty vehicles	0.317	0.053	26.6	29.8	4.4	6.8	0.004
Road transport: Mopeds & motorcycles	0.000	0.016	0.4	0.2	0.2	0.5	0.003
Road transport: Gasoline evaporation	0.000	0.000	0.0	0.0	0.0	0.0	0.000
Road transport: Brake wear	0.000	0.000	0.2	0.3	0.4	0.0	0.000
Road transport: Tyre wear	0.000	0.000	0.0	0.0	3.7	0.0	0.000
Road transport: Road abrasion	0.000	0.000	0.0	0.0	0.0	0.0	0.000
Railways	0.016	0.002	1.0	1.1	0.2	0.2	0.002
National navigation (Shipping)	0.015	0.078	3.4	1.5	0.7	5.5	0.005
Commercial/Institutional: Mobile	0.011	0.005	1.1	1.0	0.6	0.7	0.003
Residential: Household and gardening (mobile)	0.000	0.001	0.1	0.0	0.0	0.1	0.001
Agriculture/Forestry/Fishing: Off-road agriculture/forestry	0.070	0.010	5.9	5.6	2.9	3.1	0.007
Agriculture/Forestry/Fishing: National fishing	0.007	0.043	2.3	1.1	0.5	4.2	0.003
Other, Mobile	0.009	0.003	0.8	0.8	0.4	0.5	0.002
Road transport exhaust total	0.673	0.119	86.2	75.6	57.2	58.8	0.101
Road transport non exhaust total	0.000	0.000	4.1	0.0	0.0	0.0	0.000
Other mobile sources total	0.171	0.148	14.2	14.7	11.2	16.1	0.028
Domestic total	0.844	0.267	104.4	90.3	68.5	74.9	0.129
Civil aviation (International)	0.000	0.000	0.0	0.0	0.0	0.0	0.000
Navigation (International)	0.054	0.269	10.4	4.9	2.6	18.0	0.018

For mobile sources, road transport displays the largest emission of dioxins and PAH. The dioxin emission share for road transport is 45 % of all mobile emissions in 2020, whereas Navigation and Agriculture/Forestry-/Fisheries have smaller shares of 29 and 20 %. For the different PAH components, road transport shares are around 80 % of total emissions for mobile sources. The remaining emissions almost solely come from Agriculture/Forestry-/Fisheries, Navigation and Industry with Agriculture/Forestry-/Fisheries as the largest source.

Figures 6.43 and 6.44 show the dioxin and PAH emission distributions into vehicle categories and other mobile sectors, respectively.

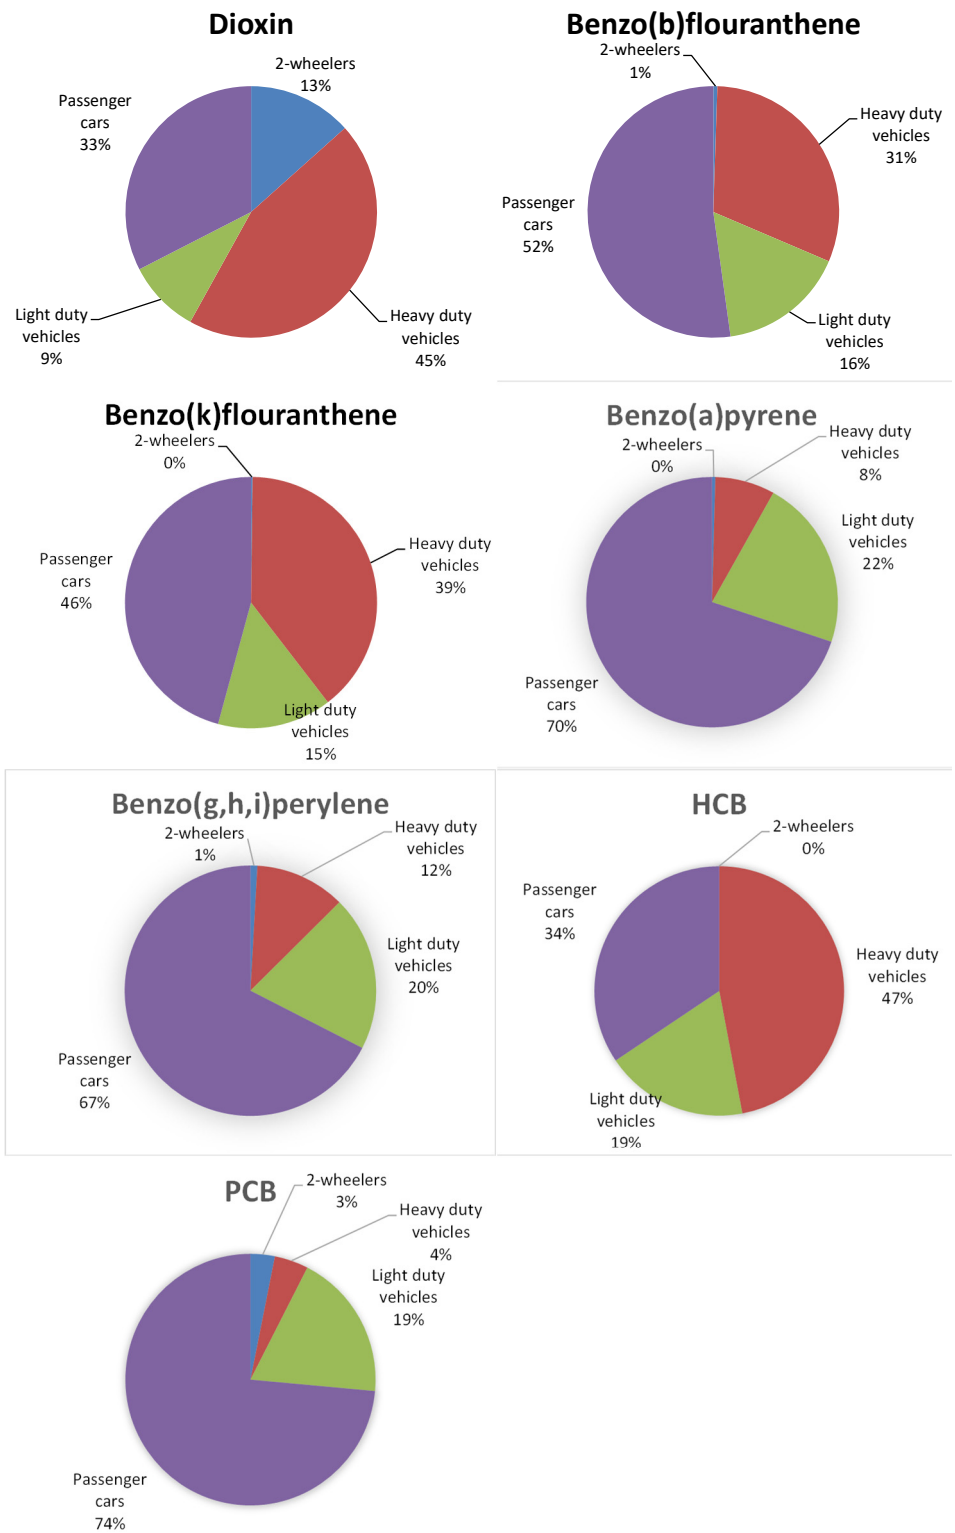


Figure 6.43 Dioxin, PAH, HCB and PCB emission shares for road transport in 2020.

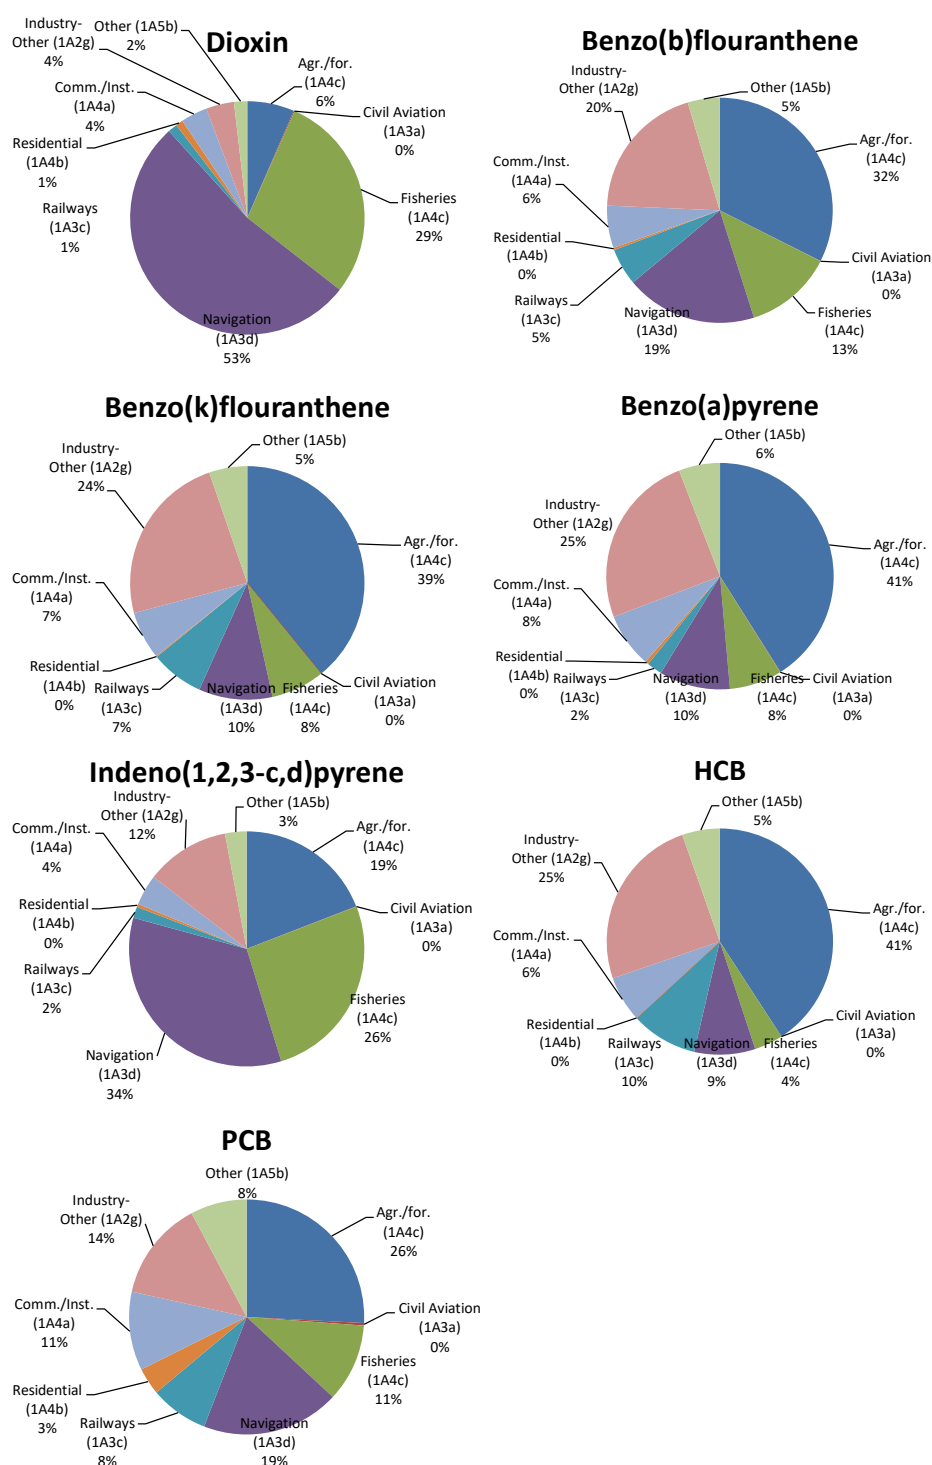


Figure 6.44 Dioxin, PAH, HCB and PCB emission shares for other mobile sources in 2020.

6.6 International transport

6.6.1 Emissions of CO₂, CH₄ and N₂O

In terms of greenhouse gas emissions, the level of emissions from Danish bunker fuel consumption are 19 %, 9 % and 14 %, respectively, for CO₂, CH₄ and N₂O, compared with the emission total for mobile sources in 2020.

The international transport emission totals of CO₂, CH₄ and N₂O are shown in Table 6.3 for 2020, split into sea transport and civil aviation. All emission figures in the 1990-2020 time series are given in Annex 16 (CRF format). In

Annex 15, the emissions are also given in CollectER format for the years 1990 and 2020.

The differences in CH₄ emissions between navigation and civil aviation are much larger than the differences in fuel consumption (and derived CO₂ emissions), and display a poor emission performance for international sea transport. In broad terms, the emission trends shown in Figure 6.45 are similar to the fuel consumption development.

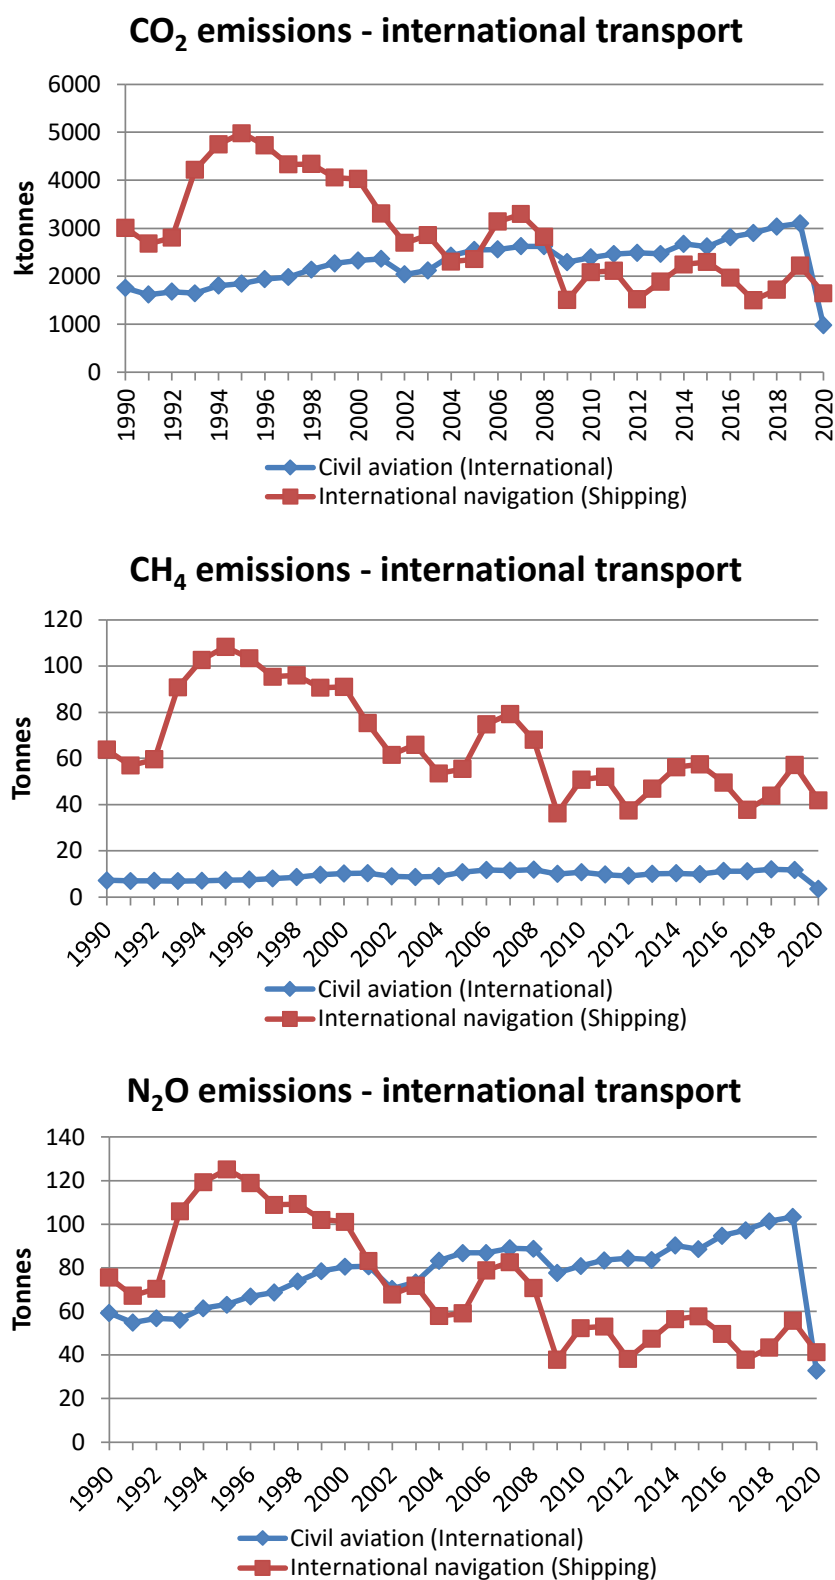


Figure 6.45 CO₂, CH₄ and N₂O emissions for international transport 1990-2020.

6.6.2 Emissions of SO₂, NO_x, TSP and BC

The most important emissions for international transport are SO₂ and NO_x. However, particles emitted from navigation near coastal areas can be a reason of concern due to the various effects from particles on human health. Also the part of BC being emitted in or near snow and ice covered regions (e.g. the Arctic area) is important from a global warming point of view, due to BC's ability to absorb light and due the darkening effect of BC when deposited to snow and ice surfaces.

The international transport emission totals are shown in Table 6.3 for 2020, split into sea transport and civil aviation. All emission figures in the 1985-2020 time series are given in Annex 16 (NFR format). In Annex 15, the emissions are also given in CollectER format for 2020.

The differences in emissions between Navigation and Civil aviation are much larger than the differences in fuel consumption and display a poor emission performance for international sea transport. In broad terms, the emission trends shown in Figure 6.46 are similar to the fuel consumption development.

However, for Navigation, minor differences occur for the emissions of SO₂ and NO_x due to varying amounts of marine gas oil and residual oil, and for SO₂ and NO_x, the development in the emission factors have an impact on the emission trends. For Civil aviation, apart from the annual consumption of jet fuel, the development of the NO_x emissions is also due to yearly variations in LTO/aircraft type (earlier than 2001) and city-pair statistics (2001 onwards).

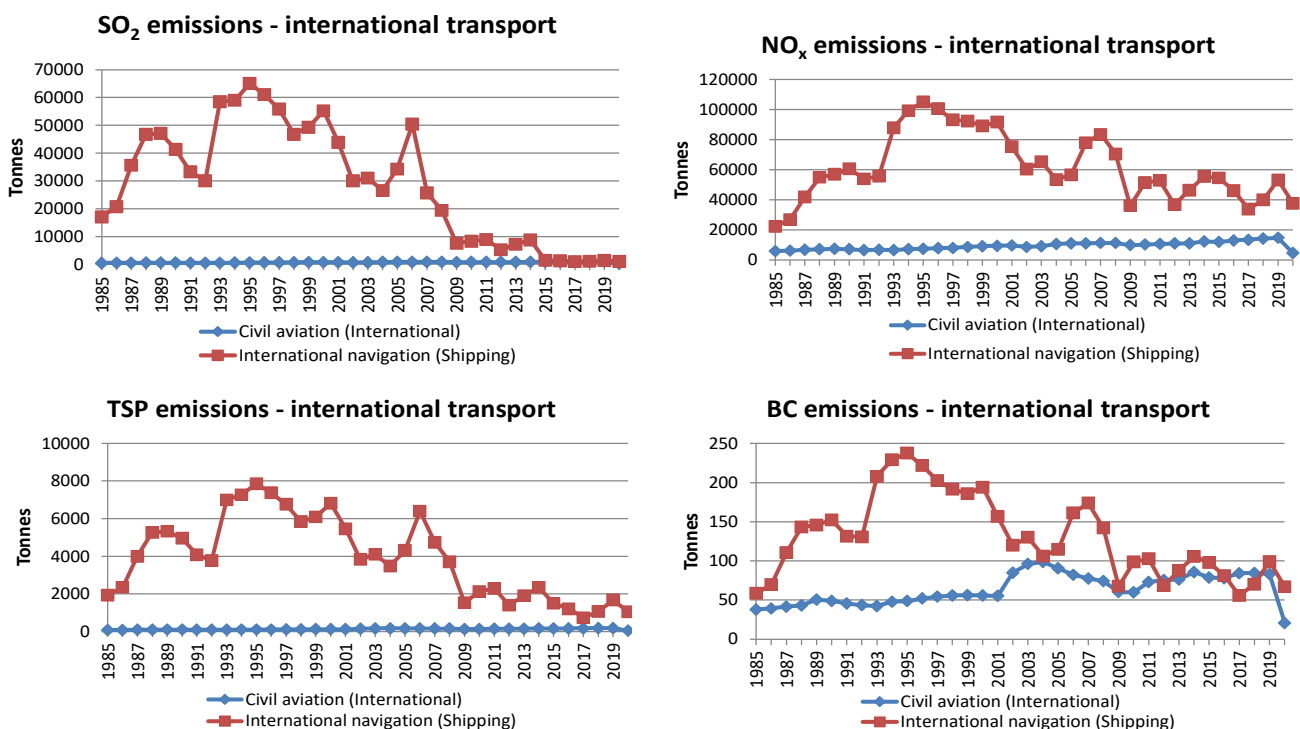


Figure 6.46 SO₂, NO_x, TSP and BC emissions for international transport 1985-2020.

7 Uncertainties

Tier 1 uncertainty estimates for greenhouse gases, are made for road transport and other mobile sources using the guidelines formulated in the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (IPCC, 2006). For road transport, railways and fisheries, these guidelines provide uncertainty factors for activity data that are used in the Danish situation. For other sectors, the factors reflect specific national knowledge (Winther et al., 2006 and Winther, 2008). These sectors are (SNAP categories): Recreational craft (a part of 1A5: Other), Agriculture and Forestry (parts of 1A4c: Agriculture-/forestry/fisheries), Industry (mobile part of (1A2f: Industry-other), Commercial/institutional (1A4a), Residential (1A4b) and National sea transport (a part of 1A3d: Navigation).

The activity data uncertainty factor for civil aviation is based on expert judgement.

The calculations for Tier 1 are shown in Annex 17 for all emission components.

Table 7.1 Tier 1 uncertainties for activity data, emission factors and total emissions in 2020 and as a trend.

Category	Activity data	CO ₂	CH ₄	N ₂ O
		%		
Road transport	2	5	40	50
Military	2	5	100	1000
Railways	2	5	100	1000
Navigation (small boats)	41	5	100	1000
Navigation (large vessels)	11	5	100	1000
Fisheries	2	5	100	1000
Agriculture	24	5	100	1000
Forestry	30	5	100	1000
Industry (mobile)	41	5	100	1000
Residential	35	5	100	1000
Commercial/Institutional	35	5	100	1000
Civil aviation	10	5	100	1000
Overall uncertainty in 2020		4.8	29.7	102.5
Trend uncertainty		4.2	2.0	50.5

As regards time series consistency, background flight data cannot be made available on a city-pair level prior to 2000. However, aided by LTO/aircraft statistics for these years and the use of proper assumptions, a good level of consistency is in any case obtained for this part of the transport inventory.

The time series of emissions for mobile machinery in the agriculture, forestry, industry, household and gardening (residential) and inland waterways (part of navigation) sectors are less certain than time series for other sectors, since DEA statistical figures do not explicitly provide fuel consumption information for working equipment and machinery.

For the emission components reported to the UNECE LRTAP convention, emission uncertainty estimates are made for road transport and other mobile sources using the guidelines for estimating uncertainties in the EMEP/EEA

guidebook (EMEP/EEA, 2019). However, for TSP, PM₁₀, PM_{2.5} and BC the latter source indicates no uncertainty factor and, instead, this factor is based on expert judgement.

The activity data uncertainty factor is assumed to be 2 and 10 % for road transport and other mobile sources, respectively, based on expert judgement.

The uncertainty estimates should be regarded as preliminary only and may be subject to changes in future inventory documentation. The calculations are shown in Annex 17 for all emission components reported to the LRTAP Convention.

Table 7.2 Uncertainties for activity data, emission factors and total emissions in 2020 and as a trend for emission components reported to UNECE LRTAP.

Pollutant	Emission factor uncertainties [%]		Emission uncertainties [%]	
	Road	Other	Overall	Trend
			2020	1990-2020
SO ₂	50	50	46	1
NO _x	50	100	56	7
NM VOC	50	100	51	4
CO	50	100	58	8
NH ₃	1000	1000	992	731
TSP	50	100	45	8
PM ₁₀	50	100	47	5
PM _{2.5}	50	100	52	2
BC	50	100	58	2
Arsenic	1000	1000	847	72
Cadmium	1000	1000	862	199
Chromium	1000	1000	861	247
Copper	1000	1000	999	5
Mercury	1000	1000	758	136
Nickel	1000	1000	907	40
Lead	1000	1000	895	7
Selenium	1000	1000	739	174
Zinc	1000	1000	960	43
Dioxins	1000	1000	711	112
Flouranthene	1000	1000	845	207
Benzo(b) flouranthene	1000	1000	855	299
Benzo(k) flouranthene	1000	1000	902	243
Benzo(a) pyrene	1000	1000	814	188
Benzo(g,h,i) perylene	1000	1000	823	262
indeno(1,2,3-c,d) pyrene	1000	1000	813	23
HCB	1000	1000	46	1
PCB	1000	1000	56	7

References

Amdissen, H., 2020: Unpublished data material for fishing vessels provided by Hanstholm Fisheries Association.

Andersen, C., 2019: Unpublished data material for small ferries.

Bak, F., Jensen, M.G. & Hansen, K.F. 2003: Forurening fra traktorer og ikke-vejgående maskiner i Danmark, Miljøprojekt nr. 779, Miljøstyrelsen (in Danish).

Dansk Teknologisk Institut, 1992: Emission fra Landbrugsmaskiner og Entreprenermateriel, commissioned by the Danish EPA and made by Miljøsamarbejdet in Århus (in Danish).

Dansk Teknologisk Institut, 1993: Emission fra Motordrevne Arbejdsredskaber og -maskiner, commissioned by the Danish EPA and made by Miljøsamarbejdet in Århus (in Danish).

Bengtsson, S., Andersson, K. & Fridell, E., 2011: A comparative life cycle assessment of marine fuels: liquefied natural gas and three other fossil fuels, 14 pp., Proc. IMechE Vol. 225 Part M: J. Engineering for the Maritime Environment (DOI: 10.1177/1475090211402136).

Bonde, R., 2021: Information of the Euro 5 vehicle recall program provided the Danish Safety Technology Authority.

Brun, I. 2018: Data for fork lifts provided by Toyota Material Handling Danmark A/S.

Christensen, A. 2018: Personal communication, Allan Christensen, N.C. Nielsen A/S.

Christensen, T. 2021: Data for fork lifts provided by Toyota Material Handling Danmark A/S.

Clemmensen, C., 2021: Data for forestry machines provided by the Danish Forest Association).

Comer, B., Olmer, N., Mao, X., Roy, B. & Rutherford, D., 2017: Black Carbon emissions and fuel use in global shipping 2015, ICCT report, pp. 103, International Council on Clean Transportation, 2017.

Cowi, 2008: Model til beregning af vej og banetransportens CO₂-ækvivalent emissioner, Technical note, pp. 42, Ministry of Transport (in Danish).

Dávastovu, J., 2010: Unpublished data material from Smyril Line.

DEA, 2021a: The Danish energy statistics, Available at: <https://ens.dk/service/statistik-data-noegletal-og-kort/maanedlig-og-aarlig-energistatistik> (16-03-2022).

- DEA, 2021b: Future fuel efficiency improvement rates for passenger cars, vans and trucks provided by the Danish Energy Agency.
- Danish Ministry of Taxation, 2015: Status over grænsehandel 2014, pp. 112.
- DNV, 2009: Marpol 73/78 Annex VI Regulations for the Prevention of Air Pollution from Ships - Technical and Operational implications, 32 pp.
- Ellermann, T., Massling, A., Løfstrøm, P., Winther, M., Nøjgaard, J.K. & Ketzel, M., 2011: Investigation of Air Pollution at the Apron at Copenhagen Airport in Relation to Working Environment (Danish with English summary). DCE - Danish Centre for Environment and Energy, Aarhus University, p. 148. DCE report no. 5. Available at: <http://www.dmu.dk/Pub/TR5.pdf>.
- EMEP/EEA, 2019: Air Pollutant Emission Inventory Guidebook, prepared by the UNECE/EMEP Task Force on Emissions Inventories and Projections (TFEIP). Available at: <https://www.eea.europa.eu/publications/emep-eea-guidebook-2019> (09-12-2019).
- Eriksen, J., 2017: Unpublished data material from Ærøfærgerne A/S.
- Fasting, P., 2021: New sales data for building and construction machinery provided by the Association of Danish Agricultural Machinery Dealers.
- Faurby, D., 2021: Unpublished data material from Scantruck A/S.
- Fenhann, J. & Kilde, N.A., 1994: Inventory of Emissions to the air from Danish Sources 1972-1992, 111 pp., ISBN 87-550-1943-9, RISØ National Laboratory.
- Hansen, C.O., 2010: Estimation af udenlandske bilers trafikarbejde i Danmark i 2009, Notatnr. 12032-005, 12 pp. Danish Road Directorate, 2010.
- Hansen, K.F. & Jensen, M.G., 2004: MÅLING AF EMISSIONER FRA FREM-DRIVNINGSSANLÆG PÅ MADSE MOLS. Ruston 20RK270, Sagsnr.: 1076868, Documentation note, 5 pages (in Danish).
- Helgason, S.H. 2021: Fuel purchase data provided by Eim Skip.
- Hernov, F., 2021: Unpublished trip-level activity data for Danish fishing vessels provided by the Danish Fisheries Agency.
- Hjelgaard, K. & Winther, M., 2011: The estimated new sales of Euro V diesel trucks equipped with EGR and SCR during the 2006-2010 time periods. Internal DCE note (unpublished). 2 p. (in Danish).
- Hjortshøj, T., 2021. Engine size and model year information provided by Thomas Hjortshøj, Volkswagen, 2021.
- ICAO Annex 16 "International standards and recommended practices, Environmental protection", Volume II "Aircraft engine emissions", 3rd ed. (2008) plus amendments, 108 pp., ISBN 978-92-9231-123-0.
- ICAO, 2011: Airport Air Quality Manual (doc. 9889), first ed. International Civil Aviation Organization. ISBN 978-92-9231-862-8.

ICAO, 2017: ICAO Annex 16 "International standards and recommended practices, Environmental protection", Volume III "Aeroplane CO₂ emissions", 28 pp., International Civil Aviation Organization.

ICCT, 2017: International Civil Aviation Organization's CO₂ standard for new aircraft, ICCT Policy update, 8 pp., International Council on Clean Transportation, 2017.

IFEU, 2004: Entwicklung eines Modells zur Berechnung der Luftschadstoffemissionen und des Kraftstoffverbrauchs von Verbrennungsmotoren in mobilen Geräten und Maschinen - Endbericht, UFOPLAN Nr. 299 45 113, pp. 122, Heidelberg.

IFEU, 2009: Aktualisierung des Modells TREMOD - Mobile Machinery (TREMOD-MM), Endbericht; Institut für Energie- und Umweltforschung, pp. 48, Heidelberg.

IFEU, 2014: Erarbeitung eines Konzepts zur Minderung der Umweltbelastung aus NRMM (non road mobile machinery) unter Berücksichtigung aktueller Emissionsfaktoren und Emissionsverminderungsoptionen für den Bestand, ISSN 1862-4804, Texte 24/2014, pp. 99, Heidelberg.

IMO, 2015: Third IMO GHG Study 2014, Smith, T.W.P., Jalkanen, J.P., Anderson, B.A., Corbett, J.J., Faber, J., Hanayama, S., O'Keefe, E., Parker, S., Johansson, L., Aldous, L., Raucci, C., Traut, M., Ettinger, S., Nelissen, D., Lee, D.S., Ng, S., Agrawal, A., Winebrake, J.J., Hoen, M., Chesworth, S. & Pandey, A., 2015: International Maritime Organization, (IMO) London, UK, April 2015. Available at:
https://glomeep.imo.org/wp-content/uploads/2016/06/GHG3-Executive-Summary-and-Report_web.pdf

IPPC, 1997: Revised 1996 IPCC guidelines for national greenhouse gas inventories. v.3: Greenhouse gas inventory reference manual [1997], Houghton, J.T., Meira Filho, L.G., Lim, B. Treanton, K., Mamaty, I., Bonduki, Y., Griggs, D.J. & Gallender, B.A. (Eds) Available at:
<https://www.ipcc-nggip.iges.or.jp/public/gl/invs6.html>

IPCC, 2006: 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. & Tanabe K. (eds). Published: IGES, Japan. Available at:
<https://www.ipcc-nggip.iges.or.jp/public/2006gl/vol2.html>

Jensen, E. 2016: Unpublished data material from Scantruck A/S.

Jensen, T.C. 2021: Dokumentation af konvertering af trafiktal til emissionsopgørelser, arbejdsnotat 81834, 38 pp. DTU Transport, 2021.

Johnsen, T., 2018: Personal communication, Thomas Johnsen, The Danish Bicycle Traders Association.

Jørgensen, H., 2017: Unpublished data material from Færgen A/S.

Knörr, W., Schacht, A. & Göres, S. 2012: Entwicklung eines Modells zur Berechnung der Energieeinsätze und Emissionen des zivilen Flugverkehrs – TREMOD AV, Texte 48/2012, ISSN 1862-4804, 66 pp., Umweltbundesamt.

Kristensen, F., 2008: Unpublished data material from Mols-Linjen.

Kristensen, F., 2013: Unpublished data material from Mols-Linjen.

Kristensen, F., 2015: Unpublished data material from Mols-Linjen.

Kristensen, H.O., 2017: Unpublished data material for small ferries provided by Naval Engineer Hans Otto Holmegaard Kristensen.

Kruse, C., 2015: Unpublished data material from Samsø Rederi.

Lastein, L. & Winther, M., 2003: Emission of greenhouse gases and long-range transboundary air pollutants in the Faroe Islands 1990-2001. National Environmental Research Institute. - NERI Technical Report 477. 62 pp. Available at:

http://www.dmu.dk/1_viden/2_Publikationer/3_fagrapporter/FR477.PDF.

Lloyd's Register, 2012: Implementing the Energy Efficiency Design Index Version 3.0, December 2012, pp. 22.

Markamp, H., 2013: Personal communication, Henrik Markamp, The National Motorcycle Association.

Matzer C., Weller K., Dippold M., Lipp S., Röck M., Rexeis M. & Hausberger S., 2019: Update of emission factors for HBEFA Version 4.1; Final report, I-05/19/CM EM-I-16/26/679 from 09.09.2019, TU Graz.

Mikkelsen, B., 2016: Unpublished data material from Pon equipment.

Ministry of Transport, 2015: TEMA2015 - et værktøj til at beregne transporters energiforbrug og emissioner i Danmark (TEMA2015 - a calculation tool for transport related fuel use and emissions in Denmark). Technical report. 126 pp.

Mortensen, L., 2015: Unpublished data material from Færgeselskabet Læsø.

Mølgård, J., 2021: Unpublished data material from the Danish State Railways.

Møller, K., 2015: Unpublished data material from Ærøfærgerne A/S.

Nielsen, D., 2019: Unpublished data material from Mols-Linjen.

Nielsen, D. 2021: Unpublished data material from Mols-Linjen.

Nielsen, M. & Schösser, M., 2016: Unpublished data material from LTEH (Dealers Association of Electric Tools and Gardening Machinery (In Danish: Leverandørforeningen for Transportabelt Elværktøj og Havebrugsmaskiner).

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Fauser, P., Mikkelsen, M.H., Albrektsen, R., Hjelgaard, K., Hoffmann, L., Thomsen, M. & Bruun,

H.G., 2013: Danish emission inventory for hexachlorobenzene and polychlorinated biphenyls. Aarhus University, DCE – Danish Centre for Environment and Energy, 65 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 103 <http://www.dce2.au.dk/pub/SR103.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkerne, S., Mikkelsen, M.H., Albrektsen, R., Thomsen, M., Hjelgaard, K., Fauser, P., Bruun, H.G., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott-Bentsen, N., Rasmussen, E., Petersen, S.B., Olsen, T. M. & Hansen, M.G. 2021. Denmark's National Inventory Report 2021. Emission Inventories 1990-2019 - Submitted under the United Nations Framework Convention on Climate Change and the Kyoto Protocol. Aarhus University, DCE – Danish Centre for Environment and Energy, 944 pp. Scientific Report No. 437. Available at: <http://dce2.au.dk/pub/SR437.pdf>

Nielsen, O.-K., Plejdrup, M.S., Winther, M., Mikkelsen, M.H., Nielsen, M., Gyldenkerne, S., Fauser, P., Albrektsen, R., Hjelgaard, K.H., Bruun, H.G. & Thomsen, M. 2021. Annual Danish Informative Inventory Report to UNECE. Emission inventories from the base year of the protocols to year 2019. Aarhus University, DCE – Danish Centre for Environment and Energy, 580 pp. Scientific Report No. 435. Available at: <http://dce2.au.dk/pub/SR435.pdf>

Notter, B. and Schmied, M. 2015: Non-road energy consumption and pollutant emissions. Study for the period from 1980 to 2050. Federal Office for the Environment, Bern, 237 pp. Environmental studies no. 1519. Available at: [Non-road energy consumption and pollutant emissions \(admin.ch\)](http://www.admin.ch/dk/non-road-energy-consumption-and-pollutant-emissions)

PHP, 1996: Research Report – Emission tests at Alpha, Mols 2 and Mols 4, 9L25MC mk6 engines #35031 and #35033, 22-23/10 1995 and 16/1 1996, DOK, PHP Basic Research, October 1996, 20 pp.

Prince, M. 2021: Unpublished data material for unregistered mopeds, Prince legal advisers.

Rasmussen, T. 2017: Unpublished data material for small ferries.

Rasmussen, H. 2021: Fuel purchase data from Royal Arctic Line.

Rubek, F., Scharling, M. & Cappelen, J. 2021: The Climate of Denmark 2020 - with English summary, Technical report No 21-01, pp. 78, Danish Meteorological Institute.

Sempos, 2019: Note on fossil carbon content in biofuels, pp. 13.

Sjögren, P., 2016: Unpublished data material from Volvo Construction Equipment.

Starcrest, 2013: Port of Los Angeles Inventory of Air Emissions – 2012. Available at: http://www.portoflosangeles.org/pdf/2012_Air_Emissions_Inventory.pdf

Statistics Denmark, 1974: Agricultural statistics 1974, Statistiske meddelelser 1975:13, Statistics Denmark. Available at: [Publikation: Landbrugsstatistik 1974 - Danmarks Statistik \(dst.dk\)](http://publikation: Landbrugsstatistik 1974 - Danmarks Statistik (dst.dk)).

Statistics Denmark, 2021a: Tractor stock data for 2003-2020 provided by Marie Louise Bak, Statistics Denmark.

Statistics Denmark, 2021b: Tractor stock data for 1950-2009 provided by Henriette Moric Ingemann, Statistics Denmark.

Statistics Denmark, 2021c: Number of tractors and harvesters 1982-2005 from Statbank Denmark (Table MASK). Available at:
<http://www.statistikbanken.dk/statbank5a/default.asp?w=1364>

Statistics Denmark, 2021d: Ferry traffic data from Statbank Denmark (Table SKIB31). Available at:
<http://www.statistikbanken.dk/statbank5a/default.asp?w=1364>

Tietge, U., Mock, P., Franco, V. & Zacharof, N., 2017: From laboratory to road: Modeling the divergence between official and realworld fuel consumption and CO₂ emission values in the German passenger car market for the years 2001–2014, Energy Policy 103 (2017) 212–222. Available at:
<http://dx.doi.org/10.1016/j.enpol.2017.01.021>

Tietge, U., Díaz, S., Mock, P., Bandivadekar, Dornoff, J., A. & Ligterink, N., 2019: From laboratory to road. A 2018 update of official and “real world” fuel consumption and CO₂ values for passenger cars in Europe, ICCT White paper, 56 pp., International Council on Clean Transportation, 2019.

Winther, M. & Ekman, B., 1998: Emissioner fra vejtrafikken i Danmark 1980-2010. Danmarks Miljøundersøgelser, Aarhus Universitet, 1998. 73 s. (Faglig rapport fra DMU, Vol. 256).

Winther, M. & Nielsen, O.K., 2006: Fuel use and emissions from non-road machinery in Denmark from 1985–2004 – and projections from 2005-2030. The Danish Environmental Protection Agency. - Environmental Project 1092: 238 pp. Available at:
<http://www.dmu.dk/Udgivelser/Arbejdsrapporter/Nr.+200-249/>

Winther, M., 2008: Fuel consumption and emissions from navigation in Denmark from 1990-2005 - and projections from 2006-2030. Technical Report from NERI no. 650. 109 pp. Available at: <http://www2.dmu.dk/Pub/FR650.pdf>

Winther, M., 2009: Emission Differences between Petroleum based Diesel and different Biodiesel Blend Ratios for Road Transport Vehicles. Transport and Air Pollution Symposium - 3rd Environment and Transport Symposium, nr. 17, Toulouse, France, 2.- 4. June 2009.

Winther, M. & Slentø, E., 2010: Heavy Metal Emissions for Danish Road Transport. National Environmental Research Institute, Aarhus University, Denmark. 99 pp. – NERI Technical Report no. 780. Available at:
<http://www.dmu.dk/Pub/FR780.pdf>

Winther, M., 2011: Ændring i partikelemission som følge af fremskyndet salg af Euro 5 biler og retrofit af filtre på tunge køretøjer. Internal DCE note (unpublished). 2 p. (in Danish).

Winther, M., Møller, F. & Jensen, T.C., 2012: Emission consequences of introducing bio ethanol as a fuel for gasoline cars, *Atmospheric Environment* 55 (2012) 144-153.

Winther, M., Kousgaard, U., Ellermann, T., Massling, A., Nøjgaard, J.K. & Ketzel, M., 2015: Emissions of NO_x, particle mass and particle numbers from aircraft main engines, APU's and handling equipment at Copenhagen Airport, *Atmospheric Environment* 100 (2015) 218-229.

Winther, M. 2020: Danish emission inventories for road transport and other mobile sources. Inventories until the year 2018. Aarhus University, DCE – Danish Centre for Environment and Energy, 132pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 411. Available at: <http://dce2.au.dk/pub/SR411.pdf>

Winther, M. & Martinsen, L. 2020. Analyse af CO₂-emissioner og økonomi ved grøn omstilling af fiskefartøjer. Aarhus Universitet, DCE – Nationalt Center for Miljø og Energi, 36 s. - Videnskabelig rapport nr. 431 [Analyse af CO₂ emissioner og økonomi ved grøn omstilling af fiskefartøjer \(au.dk\)](#).

Wismann, T., 1999: MOLS-LINIEN, Mai Mols - Måling af emissioner fra hovedturbiner, dk-RAPPORT 14.901, 9 pages (in Danish).

Annexes

All annexes are available at:

<http://envs.au.dk/videnudveksling/luft/emissioner/reportingsectors/mobilesources/>

List of content

Annex 1: Fleet data 1985-2020 for road transport (No. vehicles)

Annex 2: Mileage data 1985-2020 for road transport (km)

Annex 3: EU directive emission limits for road transportation vehicles

Annex 4: Basis fuel consumption and emission factors (g per km) for conventional vehicles and PHEV (gasoline), fuel consumption factors for electric, PHEV (el) and hydrogen vehicles

Annex 6: Deterioration factors in 2020

Annex 7: Final fuel consumption factors (MJ/km) and emission factors (g/km) for conventional vehicles and PHEV (gasoline), fuel consumption factors for electric, PHEV (el) and hydrogen vehicles in 2020, for urban/rural/highway and weighted traffic

Annex 8: Fuel consumption (GJ) and emissions (tonnes) per vehicle category and as totals

Annex 9: Model consumption: Fuel sales derived fuel and emission adjustment factors

Annex 10-1: Correspondence table between actual aircraft type codes and representative aircraft types

Annex 10-2: LTO no. and average LTO fuel consumption and emission factors per representative aircraft type for domestic and international flights (Copenhagen and other airports)

Annex 10-3: No. of flights between Danish airports and airports in Greenland and Faroe Islands

Annex 10-4: Total distance flown (NM) and average cruise fuel consumption and emission factors per representative aircraft type for cruise flying

Annex 10-5: LTO times-in-modes (s) for the Danish airports

Annex 10-6: APU Engine mode specific fuel flows (kg/h), emission rates (kg/h or g/kg) and times-in-modes per aircraft type

Annex 11-1: Stock data for diesel tractors 1985-2020

Annex 11-2: Stock data for gasoline tractors 1985-2005

Annex 11-3: Stock data for harvesters 1985-2020

Annex 11-4: Stock data for fork lifts 1985-2020

Annex 11-6: Stock data for construction machinery 1985-2020

Annex 11-7: Stock data for machine pools 1985-2020

Annex 11-8: Stock data for household and gardening machinery 1985-2020

Annex 11-9: Stock data for recreational craft 1985-2020

Annex 11-10: Stage V Emission Standards for Nonroad Engines

Annex 11-11: Engine size, annual working hours (0 year engines), load factors and maximum lifetime for building and construction machinery

Annex 11-12: Engine size, annual working hours (0 year engines), load factors and maximum lifetime for gasoline fueled working machinery

Annex 12-1: Annual traffic data (no. of round trips) per route for Danish ferries 1990-2020

Annex 12-2: Annual traffic data (no. of round trips) per route per ferry for Danish ferries 1990-2020

Annex 12-3: Round trip shares per route per ferry for Danish ferries 1990-2020

Annex 12-4: Sailing time (single trip) per route per ferry for Danish ferries 1990-2020

Annex 12-5: Engine load factor (% MCR) per route per ferry for Danish ferries 1990-2020

Annex 12-6: Ferry service, ferry name, engine type, engine year, fuel type, main engine MCR (kW), aux. engine (kW), engine load factors (%), Number of round trips, Sailing time (mins), MWh produced, fuel consumption (tons and GJ), specific fuel consumption (g/kWh), SO₂, NO_x, NMVOC, CH₄, VOC, CO, CO₂, N₂O, NH₃, TSP, PM₁₀, PM_{2.5} and BC emission factors for 2020 (g/kWh, g/GJ, g/kg fuel).

Annex 12-7: Hours at sea, engine load (%), MWh produced, fuel consumption (PJ), specific fuel consumption (g/kWh), SO₂, NO_x, NMVOC, CH₄, VOC, CO, CO₂, N₂O, NH₃, TSP, PM₁₀, PM_{2.5} and BC emission factors (g/kWh, g/GJ, g/kg fuel) for Danish fishing vessels 1985-2020 distributed into overall length classes.

Annex 13-1: Specific fuel consumption, NO_x, CO, VOC, NMVOC and CH₄ emission factors (g per kWh) per engine year for marine engines

Annex 13-2: Fuel consumption (PJ and tonnes), S-%, SO₂, NO_x, NMVOC, CH₄, CO, CO₂, N₂O, TSP, PM₁₀, PM_{2.5} and BC emission factors (g/kg fuel and g/GJ) per fuel type for national sea transport, international sea transport and fisheries

Annex 13-3: Engine load adjustment functions for sfc, NO_x, VOC, CO, N₂O and TSP emission factors for marine engines

Annex 14-1: Fuel sales figures from DEA, and further processed fuel consumption data suited for the Danish inventory

Annex 14-2: Fuel sulphur legislation limits, fuel sulphur content and lower heating values used in the Danish inventory

Annex 15-1: Emission factors for 1990 in CollectER format

Annex 15-2: Emission factors for 2020 in CollectER format

Annex 15-3: Emissions for 1990 in CollectER format

Annex 15-4: Emissions for 2020 in CollectER format

Annex 15-5: Non-exhaust emission factors, activity data and total non-exhaust emissions of TSP, PM₁, PM_{2.5}, BC and heavy metals in 2020

Annex 16-1: Fuel consumption 1985-2020 in CRF format

Annex 16-2: Emissions 1985-2020 in CRF format

Annex 16-3: Fuel consumption 1985-2020 in NFR format

Annex 16-4: Emissions 1985-2020 in NFR format

Annex 17-1: Uncertainty estimates for greenhouse gases

Annex 17-2: Uncertainty estimates for emission components reported to the LRTAP Convention

All annexes are available at:

<http://envs.au.dk/videnudveksling/luft/emissioner/supporting-documentation/air-pollution-iir/>

DANISH EMISSION INVENTORIES FOR ROAD TRANSPORT AND OTHER MOBILE SOURCES

Inventories until 2020

This report explains the parts of the Danish emission inventories related to road transport and other mobile sources. Emission results are shown for CO₂, CH₄, N₂O, SO₂, NO_x, NMVOC, CO, particulate matter (PM), BC, heavy metals, dioxins, HCB, PCBs and PAHs. From 1990-2020 the fuel consumption and CO₂ emissions for road transport increased by 26 and 19 %, respectively, and CH₄ emissions have decreased by 90 %. A N₂O emission increase of 42 % is related to the relatively high emissions from older gasoline catalyst cars. The 1985-2020 emission decrease for NO_x, NMVOC, CO, particulates (exhaust only: Size is below PM_{2.5}) and BC are 77, 92, 91, 90 and 88 %, respectively, due to the introduction of vehicles complying with gradually stricter emission standards. For SO₂ the emission drop 99 % (due to reduced sulphur content in the diesel fuel), whereas the NH₃ emissions increased by 1068 % (due to the introduction of catalyst cars). For other mobile sources the calculated fuel consumption and emission changes for CO₂, CH₄ and N₂O were -19, -20, -64 and -5 %, from 1990 to 2020. The emissions of SO₂, NO_x, NMVOC, CO and PM (all size fractions) decreased by 96, 49, 66, 37, 79 and 80 %, respectively, from 1985 to 2020. For NH₃ the emissions increased by 15 % in the same time period. Uncertainties for the emissions and trends were estimated.